

Multi Channel AV Receiver

Operating Instructions

STR-DN1020

WARNING

To reduce the risk of fire or electric shock, do not expose this apparatus to rain or moisture.

To reduce the risk of fire, do not cover the ventilation opening of the apparatus with newspapers, tablecloths, curtains, etc.

Do not place the naked flame sources such as lighted candles on the apparatus.

To reduce the risk of fire or electric shock, do not expose this apparatus to dripping or splashing, and do not place objects filled with liquids, such as vases, on the apparatus.

Do not install the appliance in a confined space, such as a bookcase or built-in cabinet.

As the main plug is used to disconnect the unit from the mains, connect the unit to an easily accessible AC outlet. Should you notice an abnormality in the unit, disconnect the main plug from the AC outlet immediately.

Do not expose batteries or apparatus with battery-installed to excessive heat such as sunshine, fire or the like.

The unit is not disconnected from the mains as long as it is connected to the AC outlet, even if the unit itself has been turned off.

Excessive sound pressure from earphones and headphones can cause hearing loss.



This symbol is intended to alert the user to the presence of the Hot Surface that may be hot if it is touched during the normal operation.

This equipment has been tested and found to comply with the limits set out in the EMC Directive using a connection cable shorter than 10 feet (3 meters).

For customers in the United States

Owner's Record

The model and serial numbers are located on the rear of the unit. Record these numbers in the space provided below. Refer to them whenever you call upon your Sony dealer regarding this product.

Model No. _____

Serial No. _____



This symbol is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



This symbol is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

Important Safety Instructions

- 1) Read these instructions.
- 2) Keep these instructions.
- 3) Heed all warnings.
- 4) Follow all instructions.
- 5) Do not use this apparatus near water.
- 6) Clean only with dry cloth.
- 7) Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
- 8) Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
- 9) Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
- 10) Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
- 11) Only use attachments/accessories specified by the manufacturer.

- 12) Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.



- 13) Unplug this apparatus during lightning storms or when unused for long periods of time.
- 14) Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.

The following FCC statement applies only to the version of this model manufactured for sale in the U.S.A. Other versions may not comply with FCC technical regulations.

NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

CAUTION

You are cautioned that any changes or modifications not expressly approved in this manual could void your authority to operate this equipment.

To reduce the risk of electric shock, the speaker cord should be connected to the apparatus and the speakers in accordance with the following instructions.

- 1) Disconnect the AC power cord from the MAINS.
- 2) Strip 10 to 15 mm of the wire insulation of the speaker cord.
- 3) Connect the speaker cord to the apparatus and the speakers carefully so as not to touch the core of speaker cord by hand. Also disconnect the AC power cord from the MAINS before disconnecting the speaker cord from the apparatus and the speakers.

For customers in Europe



**Disposal of Old Electrical & Electronic Equipment
(Applicable in the European Union and other European countries with separate collection systems)**

This symbol on the product or on its packaging indicates that this product shall not be treated as household waste. Instead it shall be handed over to the applicable collection point for the recycling of electrical and electronic equipment. By ensuring this product is disposed of correctly, you will help prevent potential negative consequences for the environment and human health, which could otherwise be caused by inappropriate waste handling of this product. The recycling of materials will help to conserve natural resources. For more detailed information about recycling of this product, please contact your local Civic Office, your household waste disposal service or the shop where you purchased the product.



**Disposal of waste batteries
(applicable in the European
Union and other European
countries with separate
collection systems)**

This symbol on the battery or on the packaging indicates that the battery provided with this product shall not be treated as household waste.

On certain batteries this symbol might be used in combination with a chemical symbol. The chemical symbols for mercury (Hg) or lead (Pb) are added if the battery contains more than 0.0005% mercury or 0.004% lead.

By ensuring these batteries are disposed of correctly, you will help prevent potentially negative consequences for the environment and human health which could otherwise be caused by inappropriate waste handling of the battery. The recycling of the materials will help to conserve natural resources. In case of products that for safety, performance or data integrity reasons require a permanent connection with an incorporated battery, this battery should be replaced by qualified service staff only. To ensure that the battery will be treated properly, hand over the product at end-of-life to the applicable collection point for the recycling of electrical and electronic equipment.

For all other batteries, please view the section on how to remove the battery from the product safely. Hand the battery over to the applicable collection point for the recycling of waste batteries.

For more detailed information about recycling of this product or battery, please contact your local Civic Office, your household waste disposal service or the shop where you purchased the product.

**Notice for customers: The following
information is only applicable to
equipment sold in countries applying
EU Directives.**

The manufacturer of this product is Sony Corporation, 1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan. The Authorized Representative for EMC and product safety is Sony Deutschland GmbH, Hedelfinger Strasse 61, 70327 Stuttgart, Germany. For any service or guarantee matters please refer to the addresses given in separate service or guarantee documents.

For customers in Australia



**Disposal of Old Electrical &
Electronic Equipment
(Applicable in the European
Union and other European
countries with separate
collection systems)**

About This Manual

- The instructions in this manual are for model STR-DN1020. The model number is located at the lower right front panel of the receiver. The illustrations used in this manual are of the USA model and they may be different from your model. Any differences in operation are marked in the manual as "Europe model only".
- The instructions in this manual describe the operation of the receiver with the supplied remote control. You can also use the control buttons on the receiver if they have the same or similar names as those on the remote control.

On copyrights

This receiver incorporates Dolby* Digital and Pro Logic Surround and the DTS** Digital Surround System.

* Manufactured under license from Dolby Laboratories. Dolby, Pro Logic, and the double-D symbol are trademarks of Dolby Laboratories.

** Manufactured under license under U.S. Patent #': 5,451,942; 5,956,674; 5,974,380; 5,978,762; 6,226,616; 6,487,535; 7,212,872; 7,333,929; 7,392,195; 7,272,567 & other U.S. and worldwide patents issued & pending. DTS and the Symbol are registered trademarks, & DTS-HD, DTS-HD Master Audio, and the DTS logos are trademarks of DTS, Inc. Product includes software. © DTS, Inc. All Rights Reserved.

This receiver incorporates High-Definition Multimedia Interface (HDMI™) technology. HDMI, the HDMI Logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.

Sirius subscriptions are sold separately and are governed by the Sirius Terms and Conditions (see www.sirius.com). Be sure to read this agreement before you purchase your subscription. Sirius, XM and all related marks and logos are trademarks of Sirius XM Radio Inc. and its subsidiaries. All rights reserved.

The font type (Shin Go R) installed in this receiver is provided by MORISAWA & COMPANY LTD. These names are the trademarks of MORISAWA & COMPANY LTD., and the copyright of the font also belongs to MORISAWA & COMPANY LTD.

iPhone, iPod, iPod classic, iPod nano, and iPod touch are trademarks of Apple Inc., registered in the U.S. and other countries.

All other trademarks and registered trademarks are of their respective holders. In this manual, ™ and ® marks are not specified.



“Made for iPod” and “Made for iPhone” mean that an electronic accessory has been designed to connect specifically to iPod or iPhone, respectively, and has been certified by the developer to meet Apple performance standards.

Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards. Please note that the use of this accessory with iPod or iPhone may affect wireless performance.

DLNA and DLNA CERTIFIED are trademarks and/or service marks of the Digital Living Network Alliance.

Wake-on-LAN is a trademark of International Business Machines Corporation in the United States.

Microsoft, Windows, Windows Vista, Windows 7™, and Windows Media are trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries.

This product is protected by certain intellectual property rights of Microsoft Corporation. Use or distribution of such technology outside of this product is prohibited without a license from Microsoft or an authorized Microsoft subsidiary.

MPEG Layer-3 audio coding technology and patents licensed from Fraunhofer IIS and Thomson.

“x.v.Color (x.v.Colour)” and “x.v.Color (x.v.Colour)” logo are trademarks of Sony Corporation.

“BRAVIA” is a trademark of Sony Corporation.

“PlayStation” is a registered trademark of Sony Computer Entertainment Inc.

“WALKMAN” is a registered trademark of Sony Corporation.

MICROVAULT is a trademark of Sony Corporation.

VAIO and VAIO Media are registered trademarks of Sony Corporation.

PARTY STREAMING and PARTY STREAMING logo are trademarks of Sony Corporation.

Table of Contents

About This Manual	4
Supplied accessories	8
Description and location of parts	9
Getting started	18

Connections

1: Installing the speakers	19
2: Connecting the speakers	21
3: Connecting the TV	23
4a: Connecting the video equipment	24
4b: Connecting the audio equipment	32
5: Connecting the antennas (aerials)	33
6: Connecting to the network	33
7: Connecting the AC power cord (mains lead)	36

Preparing the Receiver

Initializing the receiver	36
Setting the speakers	37
Using AUTO CALIBRATION	38
Configuring the network settings of the receiver	43
Guide to on-screen display operation	44

Basic Operations

Playing an input source equipment	46
Playing an iPhone/iPod	49
Playing a USB device	52
Recording using the receiver	54

Tuner Operations

Listening to FM/AM radio	55
Presetting FM/AM radio stations (Preset Tuning)	56
Receiving RDS broadcasts	57
(Europe and Australia models only)	
Listening to Satellite Radio	58
(USA and Canada models only)	
Connecting a satellite radio tuner	58
Preparing to listen to a satellite radio	59
Selecting a channel of the satellite radio	59
Presetting satellite radio channels	60
Restricting access to specific channels (Parental Lock)	61

Enjoying Surround Sound

Selecting the sound field	64
Using the SOUND OPTIMIZER	68
Resetting sound fields to the default settings	68

Using Network Features

About the network functions of the receiver	69
Setting up the server	69
Enjoying audio content stored on the server	73
Listening to music services	75
Using the PARTY STREAMING function	77
Updating the software	78
Searching for an item using a keyword	80

“BRAVIA” Sync Features

What is “BRAVIA” Sync?	81
Preparing for the “BRAVIA” Sync	82
Playing back equipment with one-touch operation (One-Touch Play)	83
Enjoying the TV sound from the speakers connected to the receiver (System Audio Control)	83
Turning off the receiver with the TV (System Power-Off)	84
Enjoying movies with the optimum sound field (Theater/Theatre Mode Sync)	84
Enjoying optimum sound field for the selected scene (Scene Select)	84

Other Operations

Using Auto Volume function	85
Switching between digital and analog audio (INPUT MODE)	85
Using the sound/images from other inputs (Input Assign)	86
Using a bi-amplifier connection	88
Using multi-zone features	88

Adjusting Settings

Using the Settings menu	91
Speaker Settings menu	92
Surround Settings menu	94
EQ Settings menu	95
Audio Settings menu	95
Video Settings menu	97
HDMI Settings menu	98
Network Settings menu	99
System Settings menu	102
Operating without connecting to a TV	102

Using the Remote Control

Programming the remote control	109
Resetting the remote control	113

Additional Information

Precautions	114
Troubleshooting	115
Specifications	125
Index	128

Supplied accessories


- Operating Instructions (this manual)
- Quick Setup Guide
- GUI Menu List
- FM wire antenna (aerial) (1)



- AM loop antenna (aerial) (1)



- Remote control (1)
 - RM-AAP063 (USA and Canada models only)
 - RM-AAP064 (Other models)



- R6 (size AA) batteries (2)




- Optimizer microphone (ECM-AC2) (1)



Inserting batteries into the remote control

Insert two R6 (size AA) batteries (supplied) by matching $\oplus$ and $\ominus$ on the batteries to the diagram inside the battery compartment of the remote control.

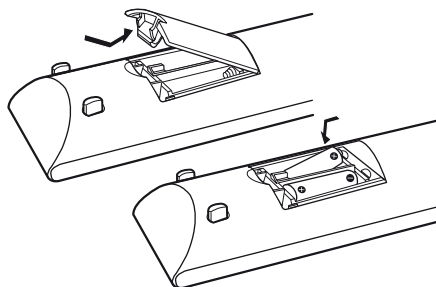


Notes

- Do not leave the remote control in an extremely hot or humid place.
- Do not use a new battery with old ones.
- Do not mix manganese batteries and other kinds of batteries.
- Do not expose the remote control sensor to direct sunlight or lighting apparatuses. Doing so may cause a malfunction.
- If you do not intend to use the remote control for an extended period of time, remove the batteries to avoid possible damage from battery leakage and corrosion.
- When you replace or remove the batteries, the programmed codes may be cleared. If this happens, reprogram the remote control (page 109).
- When the receiver no longer responds to the remote control, replace all the batteries with new ones.

Description and location of parts

Front panel

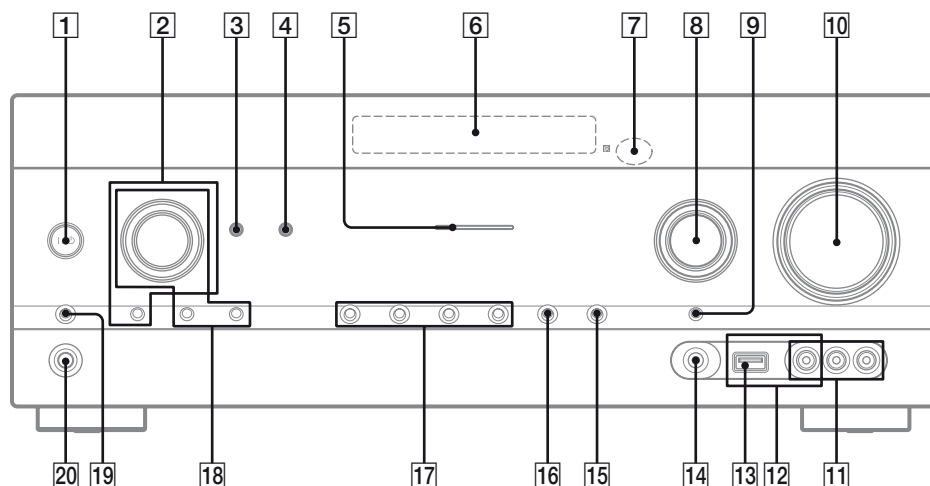

1 I/⏻ (on/standby) (page 36, 56, 68)

2 **TONE, TONE MODE**

Press TONE MODE repeatedly to select BASS or TREBLE, then turn TONE to adjust the level.

3 **SOUND OPTIMIZER** (page 68)

4 **AUTO VOL** (page 85)

5 **MULTI CHANNEL DECODING indicator**

Lights up when multi channel audio signals are decoded (page 117).

6 **Display panel** (page 10)

7 **Remote control sensor**

Receives signals from remote control.

8 **INPUT SELECTOR** (page 47, 54, 85)

9 **INPUT MODE** (page 85)

10 **MASTER VOLUME** (page 47)

11 **VIDEO 2 IN jacks** (page 30)

12 **iPhone/iPod terminals** (page 29)

Connects the ⚡ (USB) port and the video jack to output audio/video from iPhone/iPod.

13 ⚡ (USB) port (page 32)

14 **AUTO CAL MIC jack** (page 39)

15 **DISPLAY** (page 108)

16 **DIMMER**

Adjusts the brightness of the display panel in 3 levels.

17 **2CH/A.DIRECT, A.F.D., MOVIE (HD-D.C.S.), MUSIC** (page 64, 66)


18 **TUNING MODE, MEMORY/ENTER, TUNING**

Press to operate a tuner (FM/AM) and satellite radio (SIRIUS) (USA and Canada models only). Turn TUNING to scan a station.

19 **SPEAKERS** (page 38)

20 **PHONES jack** (page 115)

Indicators on the display panel

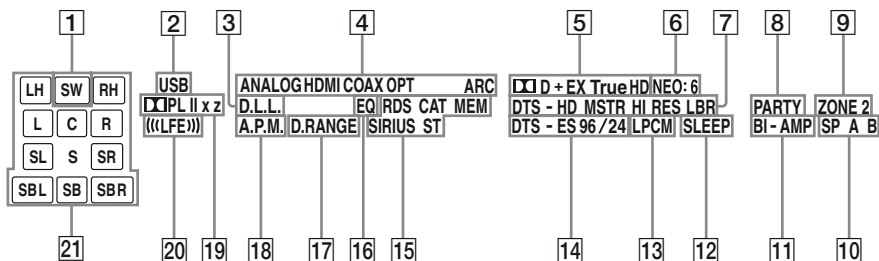

1 SW

Lights up when the audio signal is output from the SUBWOOFER jack.

2 USB

Lights up when iPhone/iPod or USB device is detected.

3 D.L.L.

Lights up when the D.L.L. (Digital Legato Linear) function is activated.

4 Input indicator

Lights up to indicate the current input.

ANALOG

- No digital signal is being input.
- INPUT MODE is set to “ANALOG”.
- The “A. DIRECT” is being selected.

HDMI

The receiver recognizes the equipment connected via an HDMI IN jack.

COAX

Digital signal is input through the COAXIAL jack (page 85).

OPT

Digital signal is input through the OPTICAL jack (page 85).

ARC

TV input is selected and the Audio Return Channel (ARC) signals are detected.

5 Dolby Digital Surround indicator*

Lights up the respective indicator when the receiver is decoding the corresponding Dolby Digital format signals.

☐ D	Dolby Digital
☐ D EX	Dolby Digital Surround EX
☐ D+	Dolby Digital Plus
☐ TrueHD	Dolby TrueHD

6 NEO:6

Lights up when DTS Neo:6 Cinema/Music decoder is activated (page 65).

7 DTS-HD indicator*

Lights up the respective indicator when the receiver is decoding the corresponding DTS-HD format signals.

DTS-HD MSTR	DTS-HD Master Audio
DTS-HD HI RES	DTS-HD High Resolution Audio
DTS-HD LBR	DTS-HD Low Bit Rate Audio

8 PARTY

Lights up when PARTY STREAMING function is activated (page 77).

9 ZONE 2

Lights up while operation in zone 2 is being enabled.

10 SP A/SP B/SP A B (page 38)

11 BI-AMP

Lights up when surround back speakers selection is set to “BI-AMP” (page 88).

12 SLEEP

Lights up when the Sleep Timer is activated.

13 LPCM

Lights up when the receiver is decoding the Linear PCM signals.

14 DTS (ES) indicator*

Lights up the respective indicator when the receiver is decoding the corresponding DTS format signals.

DTS	DTS
DTS-ES	DTS-ES
DTS 96/24	DTS 96 kHz/24 bit

15 Tuning indicators

Lights up when the receiver tunes to a radio station, or a satellite radio station.

RDS (Europe and Australia models only)

Tuned to a station with RDS services.

CAT (USA and Canada models only)

The category mode is selected during the satellite radio operation.

MEM

Memory function, such as Preset Memory (page 56), etc., is activated.

SIRIUS (USA and Canada models only)

The SiriusConnect Home tuner is connected and "SR" is selected.

ST

Stereo broadcast

16 EQ

Lights up when the equalizer is activated.

17 D.RANGE

Lights up when dynamic range compression is activated (page 94).

18 A.P.M.

Lights up when the A.P.M. (Automatic Phase Matching) function is activated.

You can only set the A.P.M. (Automatic Phase Matching) function in the DCAC (Digital Cinema Auto Calibration) function (page 38).

19 Dolby Pro Logic indicator

Lights up the respective indicator when the receiver performs Dolby Pro Logic processing. This matrix surround decoding technology can enhance input signals.

	PL	Dolby Pro Logic
	PL II	Dolby Pro Logic II
	PL IIx	Dolby Pro Logic IIx
	PL IIz	Dolby Pro Logic IIz

Note

These indicators may not light up depending on the speaker pattern setting.

20 ((LFE))

Lights up when the disc being played back contains an LFE (Low Frequency Effect) channel and the LFE channel signal is actually being reproduced.

21 Playback channel indicators

The letters (L, C, R, etc.) indicate the channels being played back. Based on the speaker settings, the box around the letter(s) vary to show how the receiver downmixes the source sound.


LH	Front Left High
RH	Front Right High
L	Front Left
R	Front Right
C	Center (monaural)
SL	Surround Left
SR	Surround Right
S	Surround (monaural or the surround equipment obtained by Pro Logic processing)
SBL	Surround Back Left
SBR	Surround Back Right
SB	Surround Back (the surround back equipment obtained by 6.1 channel decoding)

Example:

Speaker pattern: 3/0.1


Recording format: 3/2.1

Sound Field: A.F.D. AUTO



* When playing a Dolby Digital or DTS format disc, make sure that you have completed the digital connections and that INPUT MODE is not set to "ANALOG" (page 85) or "A. DIRECT" is not selected.

Rear panel

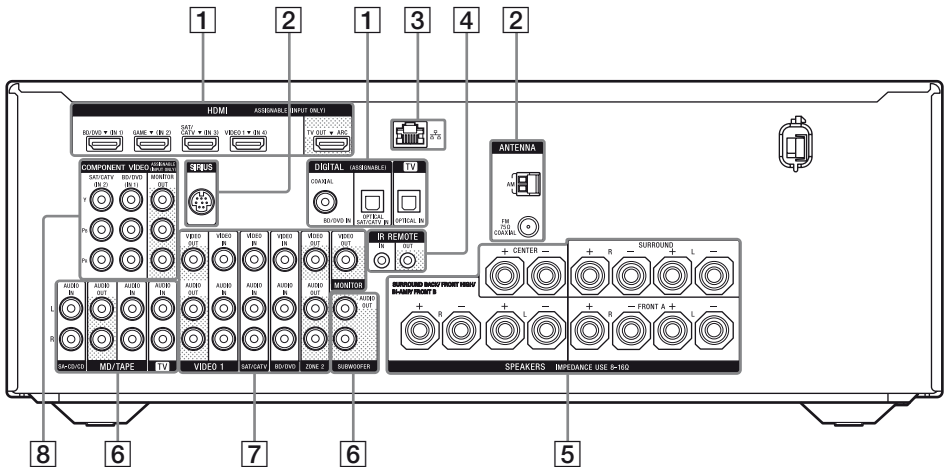

1 DIGITAL INPUT/OUTPUT section



HDMI IN/OUT* jacks (page 23, 27, 28, 29, 30)



OPTICAL IN jacks (page 23, 27, 28)



COAXIAL IN jack (page 27)

2 ANTENNA section



FM ANTENNA jack (page 33)



AM ANTENNA terminals (page 33)



SIRIUS jack (USA and Canada models only) (page 58)

3 NETWORK section



LAN port (page 35)

4 Controls jacks for Sony equipment and other external equipment



IR REMOTE IN/OUT jacks (page 89)

5 SPEAKERS section (page 21)



6 AUDIO INPUT/OUTPUT section



White (L) AUDIO IN/OUT jacks (page 23, 32)




Red (R)



Black AUDIO OUT jacks (page 21)

7 VIDEO/AUDIO INPUT/OUTPUT section (page 23, 27, 28, 30)



White (L)

AUDIO IN/OUT jacks



Red (R)



Yellow

VIDEO IN/OUT* jacks



AUDIO OUT jacks

VIDEO OUT jack (page 89)

8 COMPONENT VIDEO INPUT/OUTPUT section (page 23, 27, 28)



Green (Y)



Blue (Pb)

Y, Pb, Pr IN/OUT* jacks




Red (Pr)

* You must connect the HDMI TV OUT or MONITOR OUT jack to your TV to watch the selected input image (page 23).

Remote control

Use the supplied remote control to operate this receiver and other equipment. The remote control is pre-programmed to operate Sony audio/video equipment. You can also program the remote control to operate non-Sony equipment. For details, see “Programming the remote control” (page 109).

- **RM-AAP063 (USA and Canada models only)**
- **RM-AAP064 (Other models)**

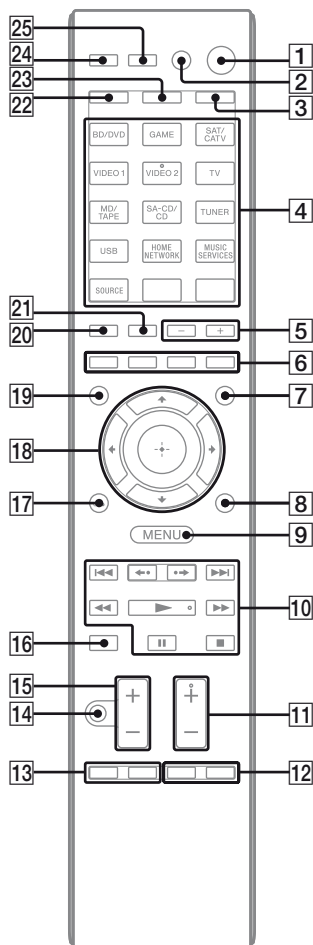

continued

1 I/⏻ (on/standby)

Turns the receiver on or sets it to the standby mode.

If you press ZONE (3) to switch the remote to zone 2 mode, you can turn the power for zone 2 on or off using I/⏻.

Saving the power in standby mode

When “Ctrl for HDMI” is set to “OFF” (page 82).

2 AV I/⏻¹⁾ (on/standby)

Turns on or off the audio/video equipment that the remote control is programmed to operate. To turn the TV on or off, press TV (23) and then press AV I/⏻.

If you press I/⏻ (1) at the same time, it will turn off the receiver and all other equipment including an amplifier in zone 2 (SYSTEM STANDBY).

Note

The function of the AV I/⏻ changes automatically each time you press the input buttons (4).

3 ZONE (page 90)

4 Input buttons²⁾

Selects the equipment you want to use. When you press any of the input buttons, the receiver turns on. The buttons are assigned to control Sony equipment. You can program the remote control to control non-Sony equipment following the steps in “Programming the remote control” on page 109.

Numeric/text buttons¹⁾²⁾

Press SHIFT (22), then press numeric/text buttons to

- preset/tune to the preset stations (page 56).
- select track numbers. Press 0/10 to select track number 10.
- select channel numbers.
- select the letters (ABC, EFG, etc.), punctuation marks (!, ?, etc.) or other symbols (#, %, etc.) when you enter characters for network features.

Press TV (23), then press the numeric buttons to select the TV channels.

-/--¹⁾

Press SHIFT (22), then press -/-- to select the channel entry mode, either one or two digit. Press TV (23), then press -/-- to select the TV channel entry mode.

>10¹⁾

Press SHIFT (22), then press >10 to select track numbers over 10.

ENT/MEM¹⁾

- Press SHIFT (22), then press ENT/MEM to
- enter the value after selecting a channel, disc, or track using numeric buttons.
 - store a station during tuner operation.

CLEAR¹⁾

- Press SHIFT (22), then press CLEAR to
- erase a letter for network features.
 - clear a mistake when you press the incorrect numeric/text button.

Ⓔ¹⁾ (Text)

Press TV (23), then press Ⓔ to display text information.

CHARACTER

Press SHIFT (22), then press CHARACTER to select the character type for network features. Each time you press CHARACTER, the character type changes in sequence as follows: “abc” (lowercase letters) → “ABC” (uppercase letters) → “123” (numbers)

ALPHABET SEARCH

Press SHIFT (22), then press ALPHABET SEARCH to search for an item using a keyword (page 80).

5 SOUND FIELD +/-

Selects a sound field (page 64).

6 Color buttons¹⁾

Displays an operation guide on the TV screen when the color buttons are available. Follow the operation guide to perform a selected operation.

7 GUI MODE

Displays the GUI menu on the TV screen.

8 TOOLS/OPTIONS¹⁾

Displays and selects items from the option menus.

Press TV (23), then press TOOLS/OPTIONS to display the TV function options.

9 MENU, HOME¹⁾

Displays the menu to operate the audio/video equipment.

Press TV (23), then press HOME to display the menus of Sony TV.

10 ⏮⏭¹⁾, ⏮⏭¹⁾, ▶¹⁾²⁾, ⏸¹⁾, ■¹⁾

Skip, backward/forward, play, pause, stop operation.

◀-./→¹⁾

Press to

- replay the previous scene or fast forward the current scene.
- skip to previous or next album when using iPhone/iPod.

REPEAT¹⁾

Press SHIFT (22), then press REPEAT to play a track or a folder repeatedly.

SHUFFLE¹⁾

Press SHIFT (22), then press SHUFFLE to play a track or a folder in random order.

FOLDER +/-¹⁾

Selects a folder.

TUNING +/-¹⁾

Scans a station.

PARTY

Press SHIFT (22), then press PARTY to operate the PARTY STREAMING function. Hold down the button to start or close a PARTY (page 77).

D.TUNING

Enters direct tuning mode.

11 TV CH +/-¹⁾²⁾ or PROG +/-¹⁾²⁾

Press TV (23), then press TV CH +/- or PROG +/- to scan for the preset TV channels.

PRESET +/-¹⁾²⁾

Selects preset stations or channels.



Press TV (23), then press (text hold) to select the next or previous page while in the text mode.

12 F1/F2¹⁾

Press BD/DVD (4), then press F1 or F2 to select the equipment.

• DVD/HDD COMBO

F1: HDD

F2: DVD disc, Blu-ray Disc

• DVD/VCR COMBO

F1: DVD disc, Blu-ray Disc

F2: VCR

AUTO VOL

Press AMP (24), then press AUTO VOL to activate the auto volume function (page 85).

SLEEP

Press AMP (24), then press SLEEP to set the receiver to turn off automatically at specified time.

Each time you press SLEEP, the display changes cyclically as follows:

0:30:00 → 1:00:00 → 1:30:00 → 2:00:00
→ OFF

Tips

- To check the remaining time before the receiver turns off, press SLEEP. The remaining time appears on the display panel.
- The Sleep Timer will be canceled when you perform the following.
 - Press SLEEP again.
 - Update the software of the receiver.

13 BD/DVD TOP MENU¹⁾, MENU¹⁾

Displays the menu or on-screen guide on the TV screen. Then, use (left/right) (18) and (up/down) (18) to perform menu operations.

TV INPUT¹⁾ or (input select)

Press TV (23), then press TV INPUT or (input select) to select the input signal (TV input or video input).

(text hold)

Press TV (23), then press (text hold) to hold the current page while in the text mode.

WIDE¹⁾ or (wide mode)

Press TV (23), then press WIDE or (wide mode) repeatedly to select the wide picture mode.

14 MUTING¹⁾ or (mute)

Turns off the sound temporarily. Press the button again to restore the sound.

Press TV (23), then press MUTING or (mute) to activate the TV's muting function.

15 TV VOL +/-¹⁾ or (volume level)

Press TV (23), then press TV VOL +/- or (volume level) +/- to adjust the TV volume level.

MASTER VOL +/-¹⁾ or (master volume)

Adjusts the volume level of all speakers at the same time.

16 DISC SKIP/iPhone CTRL¹⁾

Press to

- skip disc when using a multi-disc changer.
- enter iPhone/iPod control mode when using iPhone/iPod.

17 RETURN/EXIT (return)

Returns to the previous menu or exits the menu while the menu or on-screen guide is displayed on the TV screen.

Press TV (23), then press RETURN/EXIT (return) to return to the previous menu of Sony TV.

18 (plus), (left/right)

Press (left/right) to select the menu items, then press (plus) to enter/confirm the selection.

19 GUIDE¹⁾ or (guide)

Press TV (23), then press GUIDE or (guide) to display the on-screen program guide.

20 AUTO CAL

Press SHIFT () , then press AUTO CAL to perform Auto Calibration.

Note

This button is not available when the receiver is in "GUI MODE".

DISPLAY¹⁾

Views information on the display panel.

(RM-AAP063 only) Press TV () , then press DISPLAY to display information of TV.

() , () (Info, Text reveal)

Press TV () , then press () to display information such as current channel number and screen mode.

Press TV () , then press () to reveal hidden information (e.g. answers to a quiz) while in the text mode.

21 SOUND OPTIMIZER

Activates the sound optimizer function (page 68).

22 SHIFT

Changes the remote control button function to activate the buttons printed in pink.

23 TV

Changes the remote control button function to activate the buttons printed in yellow.

24 AMP

Activates the receiver operation for main zone (page 103).

25 RM SET UP

Programs the remote control (page 109).

¹⁾See the table on page 17 for information on the buttons that you can use to control each equipment.

²⁾The 5/JKL/VIDEO 2, /PARTY and TV CH +/- PROG +/-PRESET +/- buttons have tactile dots. Use the tactile dots as reference when operating the receiver.

Notes

- The above explanation is intended to serve as examples.
- Depending on the model of your connected equipment, some functions explained in this section may not work with the supplied remote control.

To control other Sony equipment

Name	TV	VCR	DVD player, DVD/VCR combo	Blu-ray Disc player	HDD Recorder	PSX	Video CD player, LD player	Digital CATV terminal ^{a)}	DSS ^{a)}	Digital satellite/ terrestrial receiver ^{b)}	Tape deck A/B	DAT deck	CD player, MD deck	iPhone/ iPod, USB device
2 AV I/⏮	●	●	●	●	●	●	●	●	●	●		●	●	
4 Numeric buttons	●	●	●	●	●	●	●	●	●	●	●	●	●	
-/→, >10	●	●	●	●	●	●	●	●	●		●		●	
ENT/MEM	●	●	●	●	●	●	● ^{d)}	●	●		●	●	●	
CLEAR			●	●		●	● ^{f)}							
☰ (Text)	●				●					●				
6 Color buttons	●		● ^{c)}	●	●			●		●				
8 TOOLS/ OPTIONS	●		●	●	●	●		●	●					●
9 MENU, HOME	●	●	●	●	●	●		●	●	●				●
10 I◀◀/▶▶I	●	●	●	●	●	●	●	●			● ^{c)}	●	●	●
◀-/→, FOLDER +/-	●		●	●	●	●	● ^{f)}	●					●	●
REPEAT			● ^{c)}	●							● ^{c)}	●	●	●
SHUFFLE													●	●
◀◀/TUNING -, ▶▶/TUNING +	●	●	●	●	●	●	●	●			●	●	●	● ^{g)}
▶, II, ■	●	●	●	●	●	●	●	●			●	●	●	●
11 PRESET +/-, TV CH +/-, PROG +/-	●	●	●	●	●		● ^{d)}	●	●	●				
12 F1/F2			●	●										
13 BD/DVD TOP MENU, BD/DVD MENU			●	●		●								
TV INPUT,  (Input select),  (Text hold), WIDE,  (Wide mode)	●													
14 MUTING, 	●													
15 MASTER VOL +/-, TV VOL +/-,  +/-	●													
16 DISC SKIP/ iPhone CTRL			●	●			● ^{f)}						●	● ^{h)}
17 RETURN/ EXIT 	●		●	●	●	●	●	●	●	●				●
18  /  /  , +	●	●	●	●	●	●		●	●	●				●
19 GUIDE, 	●		● ^{c)}	●	●	●		●		●				
20 DISPLAY	●	●	●	●	●	●	●	●	●				●	●

^{a)} USA and Canada models only.

^{b)} Other models.

^{c)} DVD player only.

^{d)} LD player only.

^{e)} Deck B only.

^{f)} Video CD player only.

^{g)} ◀◀/▶▶ only.

^{h)} iPhone/iPod only.

Getting started

You can enjoy your audio/video equipment connected to the receiver by following the simple steps below.


Installing and connecting the speakers (page 19, 21)



Checking the connection appropriate for your equipment

Connecting the TV and video equipment (page 23, 24)

The image quality depends on the connecting jack. See the illustration below. Select the connection according to the jacks on your equipment. We recommend that you connect your video equipment via HDMI connection if they have HDMI jacks.

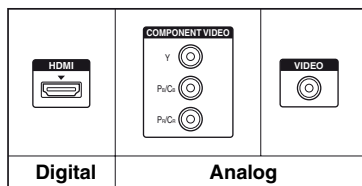

High quality image



Connecting the audio equipment (page 32)



Setting the audio output settings on the connected equipment

To output multi channel digital audio, check the digital audio output setting on the connected equipment.
For a Blu-ray Disc player, check that “Audio (HDMI)”, “Dolby Digital (Coaxial/Optical)”, and “DTS (Coaxial/Optical)” are set to “Auto”, “Dolby Digital” and “DTS” respectively (as of September 2010).
For a PlayStation 3, check that “BD/DVD Audio Output Format (HDMI)” is set to “Bitstream” (with system software version 3.5).
For details, refer to the operating instructions supplied with the connected equipment.



Preparing the receiver

See “7: Connecting the AC power cord (mains lead)” (page 36) and “Initializing the receiver” (page 36).



Setting the speakers

Select the speaker pattern (page 37), then perform Auto Calibration (page 38).


Note

You can check the speaker connection using “Test Tone” (page 93). If the sound is not output correctly, check the speaker connection and make the settings explained above again.

1: Installing the speakers

This receiver allows you to use a 7.2 channel system (7 speakers and 2 subwoofers).

Example of speaker system configuration

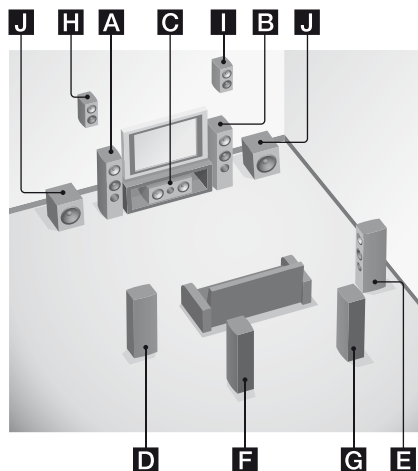

- A** Front speaker (Left)
- B** Front speaker (Right)
- C** Center speaker
- D** Surround speaker (Left)
- E** Surround speaker (Right)
- F** Surround back speaker (Left)*
- G** Surround back speaker (Right)*
- H** Front high speaker (Left)*
- I** Front high speaker (Right)*
- J** Subwoofer

* You cannot use the surround back speakers and the front high speakers simultaneously.

5.1 channel speaker system

To fully enjoy theater-like multi channel surround sound requires five speakers (two front speakers, a center speaker, and two surround speakers) and a subwoofer.

7.1 channel speaker system using surround back speakers


You can enjoy high fidelity reproduction of DVD or Blu-ray Disc software recorded sound in 6.1 channel or 7.1 channel format by connecting additional one surround back speaker (6.1 channel) or two surround back speakers (7.1 channel).

7.1 channel speaker system using front high speakers


You can enjoy vertical sound effects by connecting additional two front high speakers in PLIIz mode (page 65).

Tips


- When you connect a 7.1 channel speaker system with two surround back speakers, all the angles **A** should be the same.



- When you connect a 7.1 channel speaker system with two front high speakers, place the front high speakers
 - at an angle between 22° to 45°.
 - at least 1 meter (3.3 feet) directly above the front speakers.




- When you connect a 6.1 channel speaker system, place the surround back speaker behind the listening position.



- Since the subwoofer does not emit highly directional signals, you can place it wherever you want.

2: Connecting the speakers

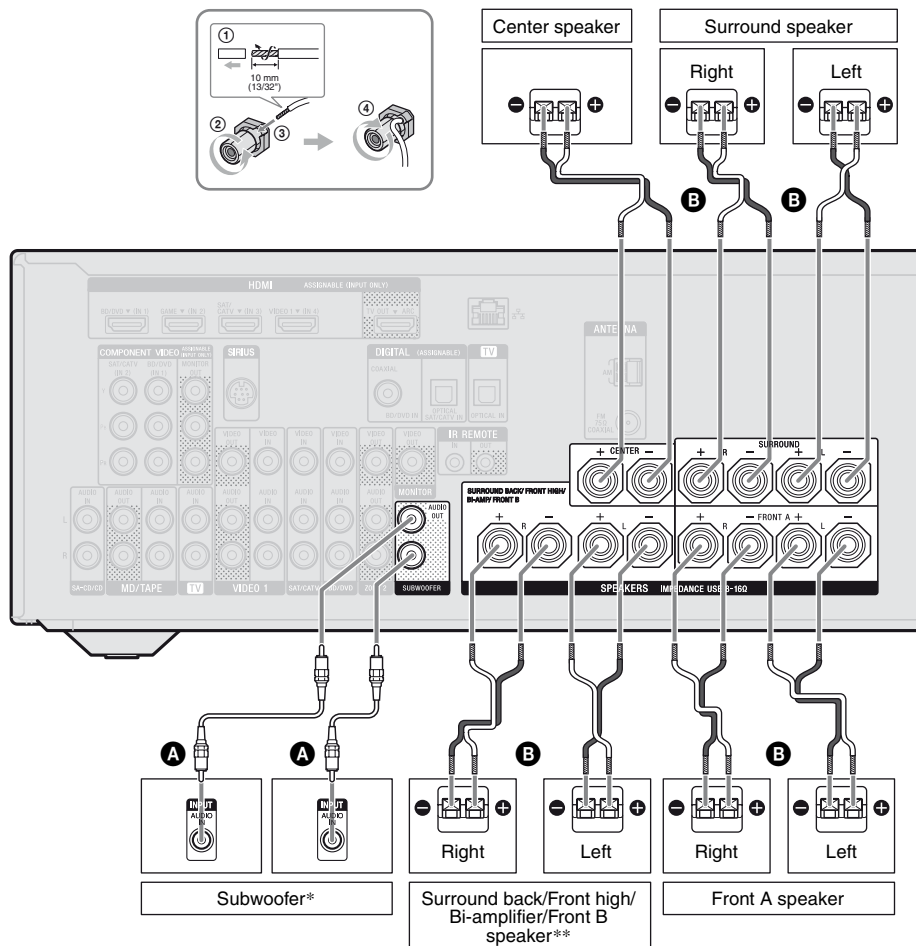

- A** Monaural audio cord (not supplied)
B Speaker cord (not supplied)

- * When you connect a subwoofer with an auto standby function, turn off the function when watching movies. If the auto standby function is set to on, it turns to standby mode automatically based on the level of the input signal to the subwoofer, and the sound may not be output.

****Notes on the SPEAKERS SURROUND BACK/FRONT HIGH/BI-AMP/FRONT B terminals connection.**


- If you connect only one surround back speaker, connect it to L of this terminals.
- If you have an additional front speaker system, connect them to this terminals.
Set the “SB Assign” to “Speaker B” in the Speaker Settings menu (page 37).
You can select the front speaker system you want by using the SPEAKERS button on the receiver (page 38).
- You can connect the front speakers to this terminals using bi-amplifier connection (page 22).
Set the “SB Assign” to “BI-AMP” in the Speaker Settings menu (page 37).

Notes

- Before connecting cords, be sure to disconnect the AC power cord (mains lead).
- Before connecting the AC power cord (mains lead), make sure that metallic wires of the speaker cords are not touching each other within the SPEAKERS terminals.
- After you have installed and connected your speaker, be sure to select the speaker pattern from the Speaker Settings menu (page 37).

Bi-amplifier connection


If you are not using surround back speakers and front high speakers, you can connect the front speakers to the SPEAKERS SURROUND BACK/FRONT HIGH/BI-AMP/FRONT B terminals using a bi-amplifier connection.

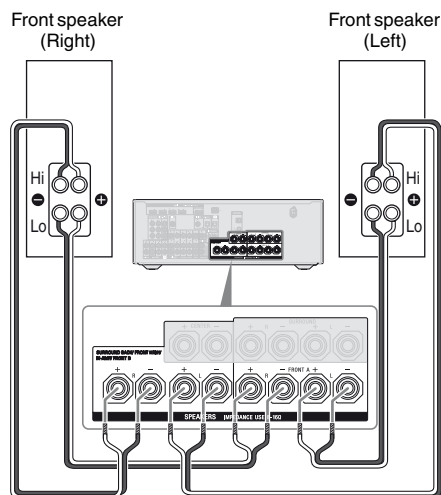

Connect the jacks on the Lo (or Hi) side of the front speakers to the SPEAKERS FRONT A terminals, and connect the jacks on the Hi (or Lo) side of the front speakers to the SPEAKERS SURROUND BACK/FRONT HIGH/BI-AMP/FRONT B terminals. Make sure that metal fittings of Hi/Lo attached to the speakers have been removed from the speakers to avoid receiver malfunction. After you have made the bi-amplifier connection, set the “SB Assign” to “BI-AMP” in the Speaker Settings menu (page 88).

3: Connecting the TV

You can watch the selected input image when you connect the HDMI TV OUT or MONITOR OUT jack to a TV. You can operate this receiver using a GUI (Graphical User Interface).

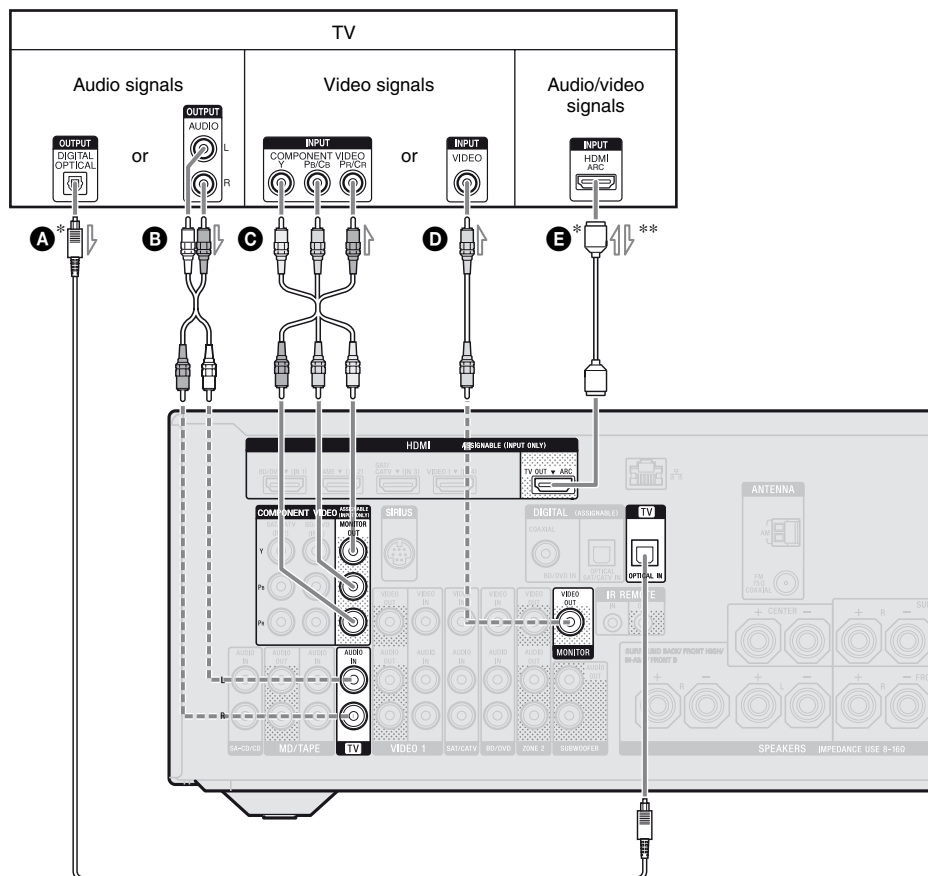

- A** Optical digital cord (not supplied)
- B** Audio cord (not supplied)
- C** Component video cord (not supplied)
- D** Video cord (not supplied)
- E** HDMI cable (not supplied)

Sony recommends that you use an HDMI-authorized cable or Sony HDMI-cable.

- Recommended connection
- - - Alternative connection

- * To enjoy the TV broadcast in multi channel surround sound from the speakers connected to the receiver, connect **A** or **E**.
Be sure to turn off the TV's volume or activate the TV's muting function.
- ** If you connect the receiver to the Audio Return Channel (ARC) compatible TV, the TV sound will output from the speakers connected to the receiver via the HDMI TV OUT jack. Be sure to set the "Ctrl for HDMI" to "ON" in HDMI Settings menu (page 82). If you want to select an audio signal using other than an HDMI cable (e.g., via an optical digital cord or an audio cord), switch the audio input mode using INPUT MODE (page 85).

Notes

- Before connecting cords, be sure to disconnect the AC power cord (mains lead).
- Be sure to turn the receiver on when the video and audio signals of a playback equipment are being output to a TV via the receiver. If the power supply of the receiver is not turned on, neither video nor audio signals will be transmitted.
- Connect a TV monitor or a projector to the HDMI TV OUT or MONITOR OUT jack on the receiver. You may not be able to record, even if you connect recording equipment.
- Depending on the status of the connection between the TV and the antenna (aerial), the image on the TV screen may be distorted. If this is the case, place the antenna (aerial) farther away from the receiver.
- When connecting optical digital cords, insert the plugs straight until they click into place.
- Do not bend or tie optical digital cords.

Tips

- All the digital audio jacks are compatible with 32 kHz, 44.1 kHz, 48 kHz, and 96 kHz sampling frequencies.
- The receiver has a video conversion function. For details, see "Function for conversion of video signals" (page 31).
- When you connect the audio output jack of the TV to the TV IN jacks of the receiver to output the TV sound from the speakers connected to the receiver, set the sound output jack of the TV to "Fixed" if it can be switched between either "Fixed" or "Variable".

4a: Connecting the video equipment

Using HDMI connection

High-Definition Multimedia Interface (HDMI) is an interface which transmits video and audio signals in digital format.

By connecting Sony "BRAVIA" Sync-compatible equipment using HDMI cables, operations can be simplified. See "BRAVIA Sync Features" (page 81).

HDMI features

- A digital audio signals transmitted by HDMI can be output from the speakers connected to the receiver. This signal supports Dolby Digital, DTS, and Linear PCM. For details, see "Digital audio formats supported by the receiver" (page 67).
- The receiver can receive Multi Channel Linear PCM (up to 8 channels) with a sampling frequency of 192 kHz or less with an HDMI connection.
- Analog video signals input to the receiver's VIDEO jack or COMPONENT VIDEO jacks can be output as HDMI signals (page 31). Audio signals are not output from an HDMI TV OUT jack while the image is converted.
- This receiver supports High Bitrate Audio (DTS-HD Master Audio, Dolby TrueHD), Deep Color (Deep Colour), x.v.Color (x.v.Colour) and 3D transmission.

Notes on HDMI connections

- An audio signal input to the HDMI IN jack is output through the SPEAKERS terminals, HDMI TV OUT jack and PHONES jack. It is not output through any other audio jacks.
- Video signals input to the HDMI IN jack can only be output through the HDMI TV OUT jack. The video input signals cannot be output through the VIDEO OUT jacks or MONITOR OUT jacks.

- The audio and video signals of HDMI input are not output from the HDMI TV OUT jack while the GUI menu is displayed.
- When you want to listen to the sound from the TV speaker, set the “Audio Out” to “TV+AMP” in the HDMI Settings menu (page 98). If you cannot play back multi channel audio source, set to “AMP”. However, the sound will not output through the TV speaker.
- DSD signals of Super Audio CD are not input and output.
- Be sure to turn the receiver on when the video and audio signals of a playback equipment are being output to a TV via the receiver. If you set the “Pass Through” to “OFF”, video and audio signals will not be transmitted when the power is turned off.
- Audio signals (format, sampling frequency, bit length, etc.) transmitted from an HDMI jack may be suppressed by the connected equipment. Check the setup of the connected equipment if the image is poor or the sound does not come out of the equipment connected via the HDMI cable.
- Sound may be interrupted when the sampling frequency, the number of channels or audio format of audio output signals from the playback equipment is switched.
- When the connected equipment is not compatible with copyright protection technology (HDCP), the image and/or the sound from the HDMI TV OUT jack may be distorted or may be lost.
If this is the case, check the specification of the connected equipment.
- You can enjoy High Bitrate Audio (DTS-HD Master Audio, Dolby TrueHD), Multi Channel Linear PCM only with an HDMI connection.
- Set the image resolution of the playback equipment to more than 720p/1080i to enjoy High Bitrate Audio (DTS-HD Master Audio, Dolby TrueHD).
- The image resolution of the playback equipment may need to be at certain settings before you can enjoy Multi Channel Linear PCM. Refer to the operating instructions of the playback equipment.
- To enjoy 3D images, connect 3D-compatible TV and video equipment (Blu-ray Disc player, Blu-ray Disc recorder, PlayStation 3, etc.) to the receiver using High Speed HDMI cables, put on 3D glasses, and then play back a 3D-compatible content.
- Depending on the TV or the video equipment, 3D images may not be displayed. Check the 3D image formats supported by the receiver (page 126).
- Not every HDMI equipment supports all functions that are defined by the specific HDMI version. For example, equipment that support HDMI, version 1.4, may not support Audio Return Channel (ARC).
- Refer to the operating instructions of each connected equipment for details.

When connecting cords

- Before connecting cords, be sure to disconnect the AC power cord (mains lead).
- It is not necessary to connect all the cords. Connect according to the availability of jacks on the connected equipment.
- Use a High Speed HDMI cable. If you use a Standard HDMI cable, 1080p, Deep Color (Deep Colour) or 3D images may not be displayed properly.
- We do not recommend using an HDMI-DVI conversion cable. When you connect an HDMI-DVI conversion cable to a DVI-D equipment, the sound and/or the image may be lost. Connect a separate audio cords or digital connecting cords, then set the “Input Assign” in the Input Option menu when the sound is not output correctly.
- When connecting optical digital cords, insert the plugs straight until they click into place.
- Do not bend or tie optical digital cords.

Tip

All the digital audio jacks are compatible with 32 kHz, 44.1 kHz, 48 kHz, and 96 kHz sampling frequencies.


If you want to connect several digital equipment, but cannot find an unused input

See “Using the sound/images from other inputs (Input Assign)” (page 86).

Converting video signals

This receiver is equipped with a function for converting video signals. For details, see “Function for conversion of video signals” (page 31).

Connecting a Blu-ray Disc player, DVD player

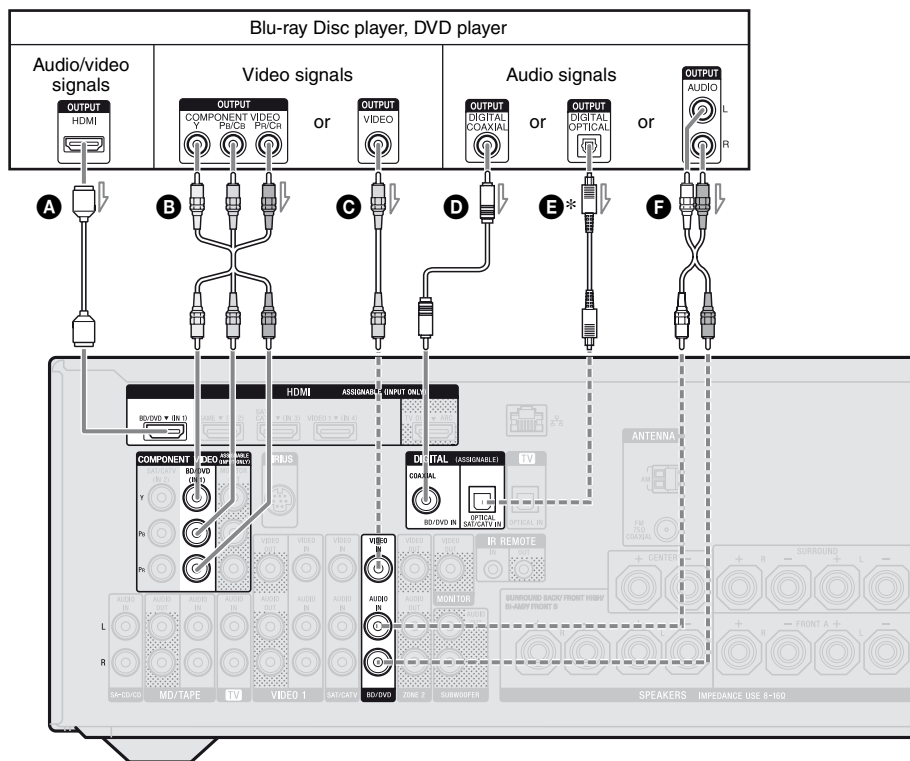

- A** HDMI cable (not supplied)
Sony recommends that you use an HDMI-authorized cable or Sony HDMI cable.
- B** Component video cord (not supplied)
- C** Video cord (not supplied)
- D** Coaxial digital cord (not supplied)
- E** Optical digital cord (not supplied)
- F** Audio cord (not supplied)


— Recommended connection
----- Alternative connection

* When you connect the equipment equipped with an OPTICAL jack, set the “Input Assign” in the Input Option menu (page 86).

Note


Be sure to change the default setting of the BD/DVD input button on the remote control so that you can use the button to control your DVD player. For details, see “Programming the remote control” (page 109).

Connecting a satellite tuner, cable TV tuner

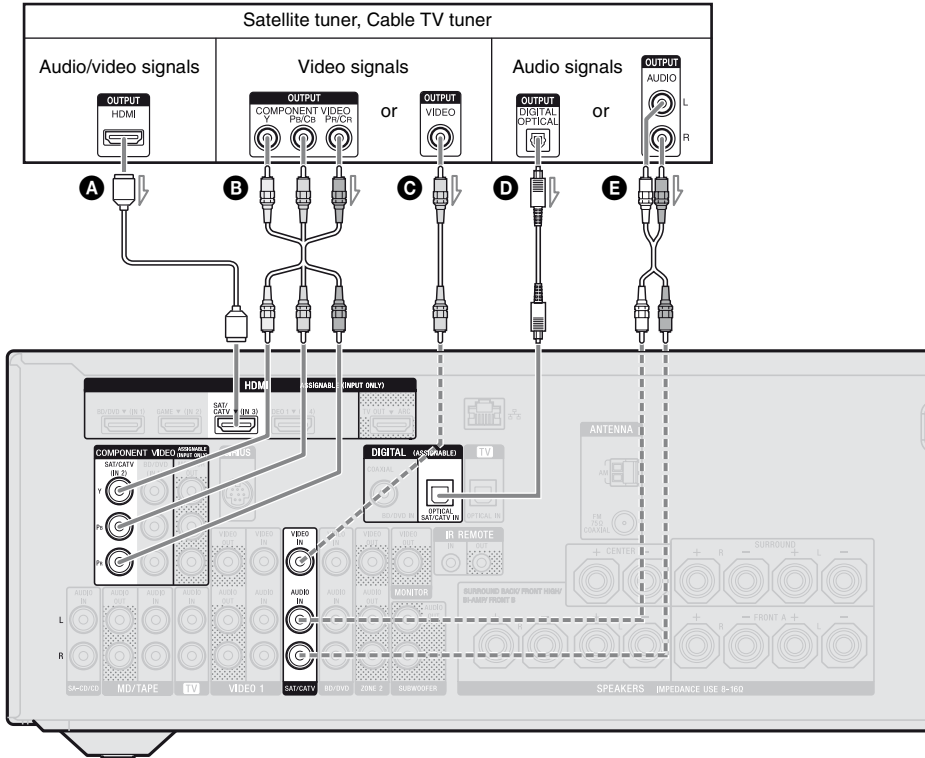

- A** HDMI cable (not supplied)
Sony recommends that you use an **HDMI-authorized cable** or **Sony HDMI cable**.
- B** Component video cord (not supplied)
- C** Video cord (not supplied)
- D** Optical digital cord (not supplied)
- E** Audio cord (not supplied)


Connecting a PlayStation 3

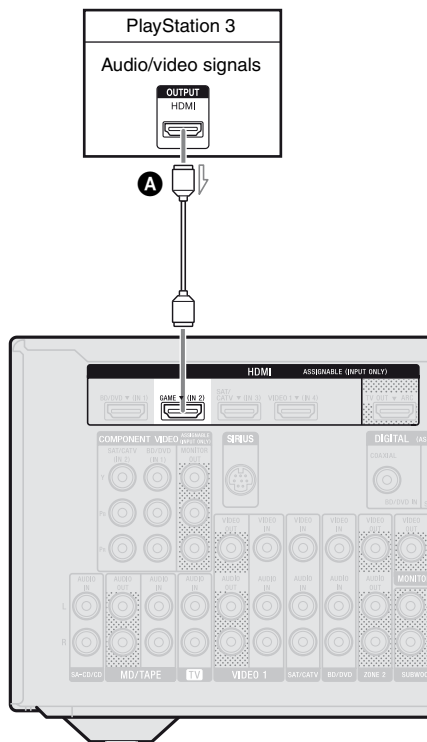

A HDMI cable (not supplied)



Sony recommends that you use an HDMI-authorized cable or Sony HDMI cable.

Connecting an iPhone, iPod for video contents

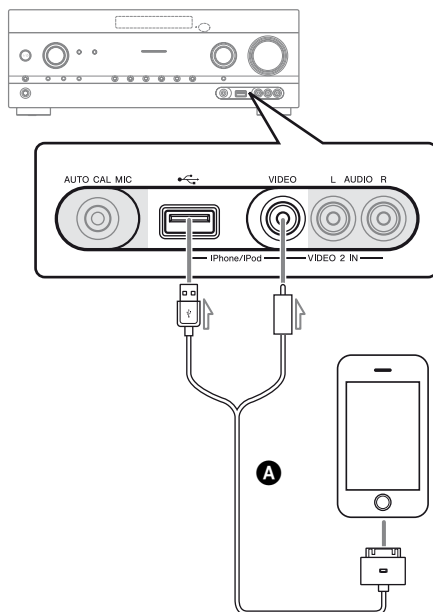

A Apple Composite AV Cable (not supplied)

Connecting other equipment

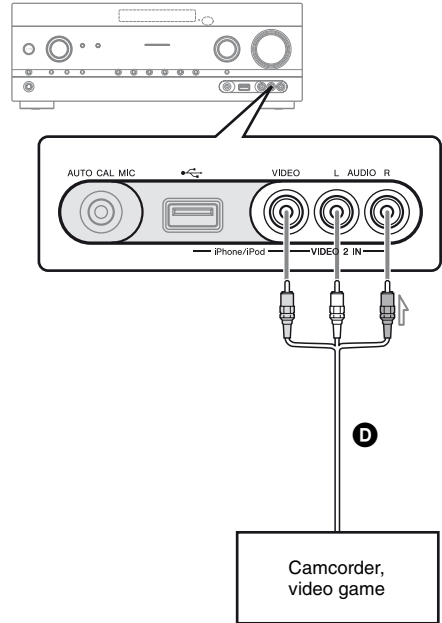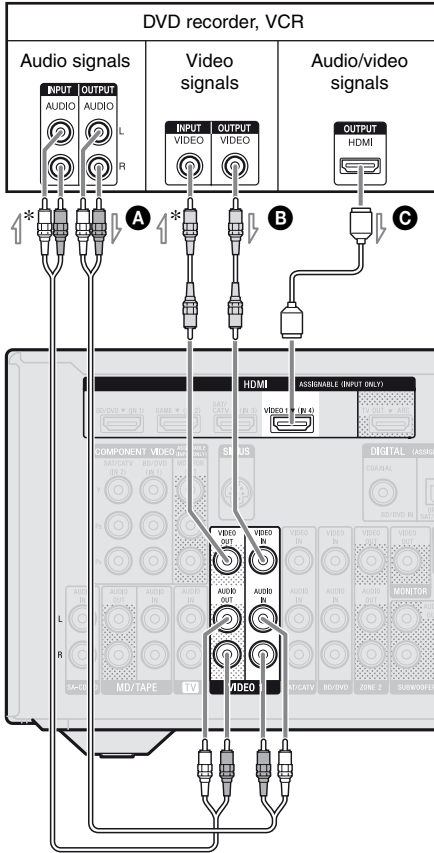

- A** Audio cord (not supplied)
- B** Video cord (not supplied)
- C** HDMI cable (not supplied)

Sony recommends that you use an **HDMI-authorized cable or Sony HDMI cable.**

- D** Audio/video cord (not supplied)

* If you want to record, you must make this connection (page 54).

Note

Be sure to change the default setting of the VIDEO 1 input button on the remote control so that you can use the button to control your DVD recorder. For details, see “Programming the remote control” (page 109).

Function for conversion of video signals

The receiver is equipped with a function for converting video signals.

- Composite video signals can be output as HDMI video and component video signals.
- Component video signals can be output as HDMI video and composite video signals.

INPUT jack \ OUTPUT jack	HDMI TV OUT	COMPONENT VIDEO MONITOR OUT	MONITOR VIDEO OUT
HDMI IN*	○	—	—
VIDEO IN	○	○	○
COMPONENT VIDEO IN	○	○	○

○ : Video signals are output.

— : Video signals are not output.

* HDMI video signals cannot be converted to component video signals and composite video signals.

As the default setting, video signals input from the connected equipment are output as shown in the table above. We recommend that you set the video conversion function to match the resolution of the monitor you are using. For details, see “Video Settings menu” (page 97).

Notes on converting video signals

- When video signals from a VCR, etc., are converted on this receiver and then viewed on your TV, depending on the status of the video signal output, the image on the TV screen may appear distorted horizontally or no image can be seen.
- If you are using an image improvement circuitry with your VCR, it may impact the video signal conversion. It is recommended to turn off this function on your VCR.
- Converted HDMI image output does not support x.v.Color (x.v.Colour), Deep Color (Deep Colour) and 3D.
- The converted video signals are output through the HDMI TV OUT jack.
- The resolution of the signals output to the HDMI TV OUT jack are converted up to 1080p.
- Set “Resolution” to “AUTO(CVBS)” or “480/576i” in the Video Settings menu to output the video signals from the MONITOR VIDEO OUT, COMPONENT VIDEO MONITOR OUT jacks when both are connected.

To connect a recording equipment


When recording, connect the recording equipment to the VIDEO 1 VIDEO OUT jacks of the receiver. Connect cords for input and output signals to the same type of jack, as VIDEO OUT jacks do not have an up-conversion function.

Note

Signals output from the HDMI TV OUT or MONITOR OUT jacks may not be recorded properly.


4b: Connecting the audio equipment

Connecting a Super Audio CD player, CD player, MD deck, Tape deck

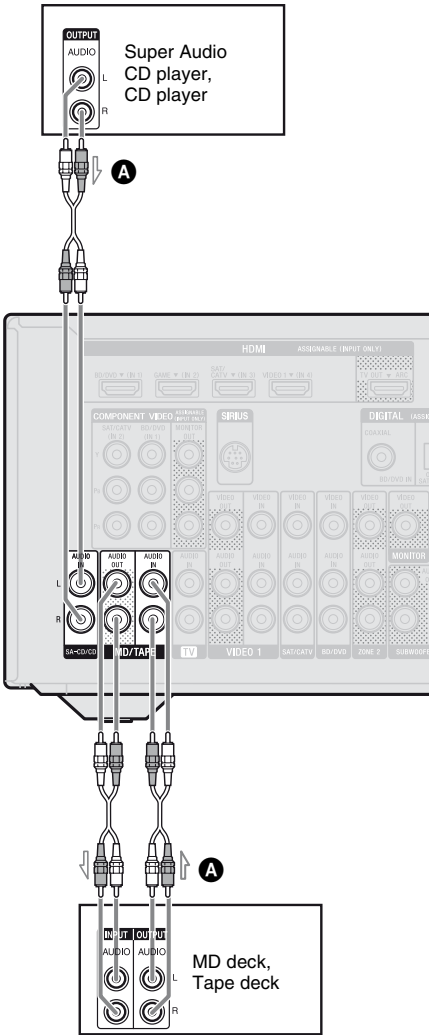

A Audio cord (not supplied)


Connecting an iPhone, iPod, USB device

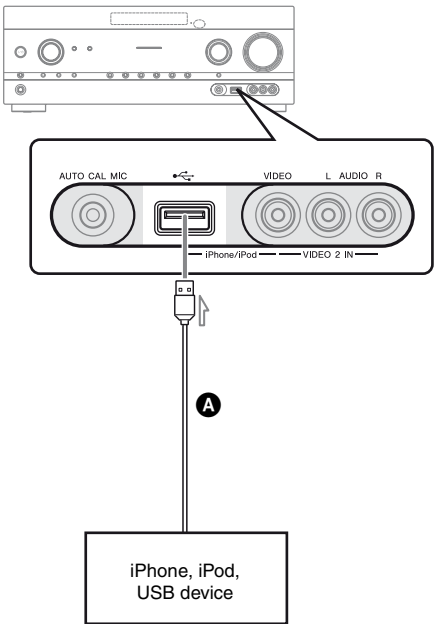

A USB cable (not supplied)

5: Connecting the antennas (aerials)

Before connecting the antennas (aerials), be sure to disconnect the AC power cord (mains lead).

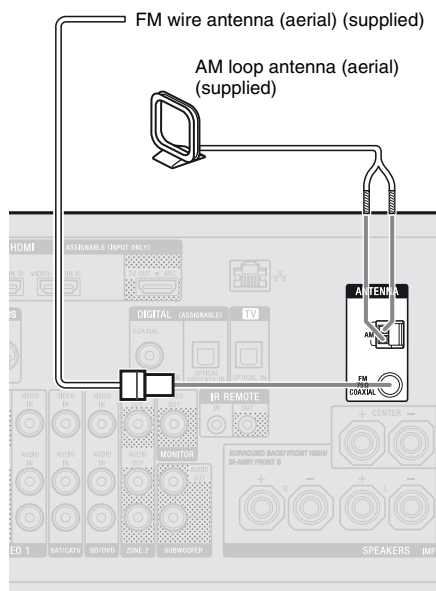

Notes

- To prevent noise pickup, keep the AM loop antenna (aerial) away from the receiver and other equipment.
- Be sure to fully extend the FM wire antenna (aerial).
- After connecting the FM wire antenna (aerial), keep it as horizontal as possible.

6: Connecting to the network

Configuring your home network with DLNA-compliant devices.

If your server (a computer, etc.) is connected to the Internet, you can connect this receiver to the Internet as well, through the wired LAN connection.

Note

The method used to connect your server (a computer, etc.) to the Internet depends on the devices, your ISP, your server, and the router used.

System requirements

The following system environment is required to use the Home Network, Music Services, and PARTY STREAMING functions of the receiver.

A Broadband line connection

A Broadband line connection to the Internet is required in order to listen to Music Services and to update the software of the receiver.

Modem

This is the device that is connected to the broadband line to communicate with the Internet. Some of these devices are integrated with the router.

Router

- Use a router compatible with 100 Mbps or greater transmission speeds to enjoy content on your home network.
- We recommend that you use a router equipped with the built-in DHCP (Dynamic Host Configuration Protocol) server. This function automatically assigns IP addresses on the LAN.

LAN cable (CAT5)

- We recommend that you use this type of cable for a wired LAN.
Some flat-type LAN cables are easily affected by noise. We recommend that you use normal-type cables.
- If the receiver is used in an environment in which there is power supply noise from electric products or in a noisy network environment, use a shielded-type LAN cable.


Server

A server is a device which delivers content (music, photos, and videos) to a DLNA device on a home network. A device that can be used as a server (a computer, etc.) must be connected to your wired LAN home network*.

* For details on servers which are compatible with this receiver, see page 69.

Configuration example

The following illustration is a configuration example of a home network with the receiver, a server. We recommend that you use a wired connection.

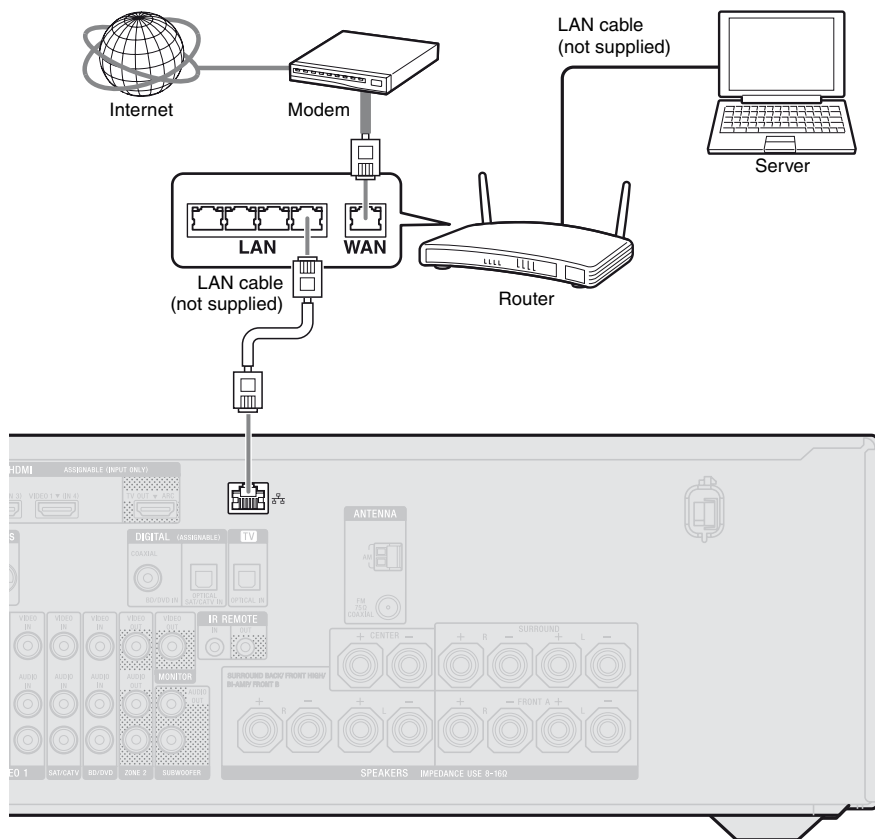


Note

An audio playback on a server (a computer, etc.) may occasionally be interrupted when you use a wireless connection.

7: Connecting the AC power cord (mains lead)

Connect the AC power cord (mains lead) to a wall outlet.

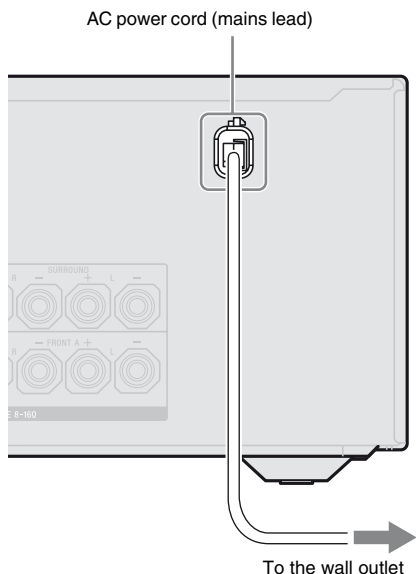

Note


Be sure to turn the receiver on when the video and audio signals of a playback equipment are being output to a TV via the receiver. If the power supply of the receiver is not turned on, neither video nor audio signals will be transmitted.

Preparing the Receiver

Initializing the receiver

Before using the receiver for the first time, initialize the receiver by performing the following procedure. This procedure can also be used to revert back to the factory default settings.

Be sure to use the buttons on the receiver to perform this operation.

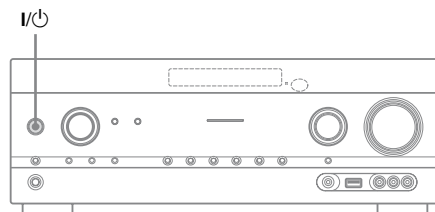

- 1 Press I/⏻ to turn off the receiver.**
- 2 Hold down I/⏻ for 5 seconds.**

The “CLEARING” appears on the display panel for a while, then changes to “CLEARED !”.

Changes or adjustments made to the settings are now reset to the defaults.


Setting the speakers

Selecting the speaker pattern

Select the speaker pattern according to the speaker system which you are using.


1 Press MENU.

The menu is displayed on the TV screen.




2 Press $\uparrow/\downarrow$ repeatedly to select “Settings”, then press $\oplus$ or $\rightarrow$.


The Settings menu list appears on the TV screen.



3 Press $\uparrow/\downarrow$ repeatedly to select “Speaker”, then press $\oplus$ or $\rightarrow$.



4 Press $\uparrow/\downarrow$ repeatedly to select “SP Pattern”, then press $\oplus$ or $\rightarrow$.



5 Press $\uparrow/\downarrow$ repeatedly to select the speaker pattern you want, then press $\oplus$.

6 Press RETURN/EXIT $\rightarrow$.

Setting the surround back speakers

You can switch the usage of the speaker(s) connected to the SPEAKERS SURROUND BACK/FRONT HIGH/BI-AMP/FRONT B terminals in accordance with the intended use.

Notes

- This setting is only available if the “SP Pattern” is set to a setting without surround back and front high speakers.
- Be sure to set the “SB Assign” before you perform Auto Calibration.

1 Press MENU.

The menu is displayed on the TV screen.

2 Press $\uparrow/\downarrow$ repeatedly to select “Settings”, then press $\oplus$ or $\rightarrow$.

The Settings menu list appears on the TV screen.

3 Press $\uparrow/\downarrow$ repeatedly to select “Speaker”, then press $\oplus$ or $\rightarrow$.

4 Press **▲/▼** repeatedly to select “SB Assign”, then press **⊕** or **➡**.

5 Press **▲/▼** repeatedly to select the parameter you want, then press **⊕**.

- **Speaker B:** If you connect an additional front speaker system to the SPEAKERS SURROUND BACK/FRONT HIGH/BI-AMP/FRONT B terminals, select “Speaker B”.
- **BI-AMP:** If you connect front speakers to the SPEAKERS SURROUND BACK/FRONT HIGH/BI-AMP/FRONT B terminals using a bi-amplifier connection, select “BI-AMP”.
- **OFF:** If you connect surround back or front high speakers to the SPEAKERS SURROUND BACK/FRONT HIGH/BI-AMP/FRONT B terminals, select “OFF”.


6 Press **RETURN/EXIT** .

Selecting the front speaker

You can select the front speakers you want to drive.

Be sure to use the buttons on the receiver to perform this operation.

SPEAKERS

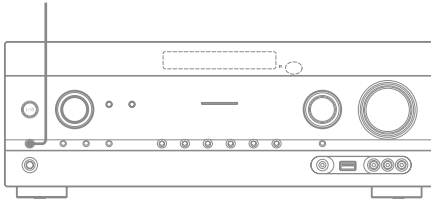

Press SPEAKERS repeatedly to select the front speaker system you want to drive.

You can confirm the selected speakers terminals by checking the indicator on the display panel.

Indicators	Selected speakers
SP A	The speaker connected to the SPEAKER FRONT A terminals.
SP B*	The speaker connected to the SPEAKER SURROUND BACK/FRONT HIGH/BI-AMP/FRONT B terminals.
SP A B*	The speaker connected to both the SPEAKER FRONT A and SPEAKER SURROUND BACK/FRONT HIGH/BI-AMP/FRONT B terminals (parallel connection).
	“SPK OFF” appears on the display panel. No audio signals are output from any speaker terminals.

* To select “SP B” or “SP A B”, set the “SB Assign” to “Speaker B” in the Speaker Settings menu (page 37).

Note

This setting is not available when headphones are connected.

Using AUTO CALIBRATION

This receiver is equipped with DCAC (Digital Cinema Auto Calibration) function which allows you to perform automatic calibration as follows:

- Check the connection between each speaker and the receiver.
- Adjust the speaker level.
- Measure the distance of each speaker from your seating position.¹⁾
- Measure the speaker size.¹⁾
- Measure the frequency characteristics (EQ).¹⁾
- Measure the frequency characteristics (Phase).¹⁾²⁾

¹⁾The measurement result is not utilized when “A. DIRECT” is selected.

²⁾The measurement result is not utilized when Dolby TrueHD or DTS-HD signals with a sampling frequency of more than 48 kHz are being received.

The DCAC is designed to achieve proper sound balance for your room. However, you can adjust the speaker levels manually according to your preference. For details, see “Test Tone” (page 93).

Before you perform Auto Calibration


Before you perform Auto Calibration, check the following items.

- Set up and connect the speakers (page 19, 21).
- Connect only the supplied optimizer microphone to the AUTO CAL MIC jack. Do not connect any other microphones to this jack.
- Set the “SB Assign” to “BI-AMP” in the Speaker Settings menu if you use bi-amplifier connection (page 88).
- Set the “SB Assign” to “Speaker B” in the Speaker Settings menu if you use speakers front B connection (page 37).
- Make sure the speaker output is not set to “SPK OFF” (page 38).
- Make sure that you are not using PARTY STREAMING function (page 77).
- Disconnect the headphones.
- Remove any obstacles in the path between the optimizer microphone and the speakers to avoid measurement errors.
- Get accurate measurement by making sure the environment is free from noise and quiet.


Notes

- The speakers emit very loud sound during the calibration and the volume cannot be adjusted. Provide consideration to your neighborhood and to the children in presence.
- If the muting function has been activated before you perform Auto Calibration, the muting function will shut off automatically.
- The correct measurements may not be able to take or Auto Calibration cannot be performed when special speakers, such as dipole speakers are used.

Setting up the Auto Calibration

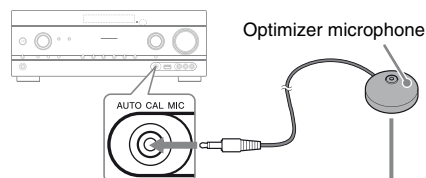

Example of using surround back speakers

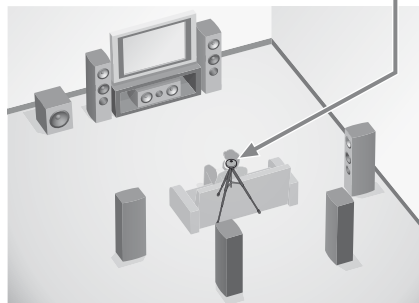

1 Select the speaker pattern (page 37).

If you connect front high speakers, select the speaker pattern that has front high speakers (5/■.■ or 4/■.■) each time you perform Auto Calibration. Otherwise, the characteristics of the front high speakers cannot be measured.


2 Connect the supplied optimizer microphone to the AUTO CAL MIC jack.

3 Set up the optimizer microphone.

Place the optimizer microphone at your seating position. Use a stool or tripod so that the optimizer microphone remains at the same height as your ears.

Confirm active subwoofer setup


- When a subwoofer is connected, turn on the subwoofer and turn up the volume prior to activating the subwoofer. Turn the LEVEL to just before the mid-point.
- If you connect a subwoofer with a crossover frequency function, set the value to maximum.
- If you connect a subwoofer with an auto standby function, set it to off (deactivated).



Note

Depending on the characteristics of the subwoofer you are using, the setup distance value may be different from the actual position.

Performing Auto Calibration

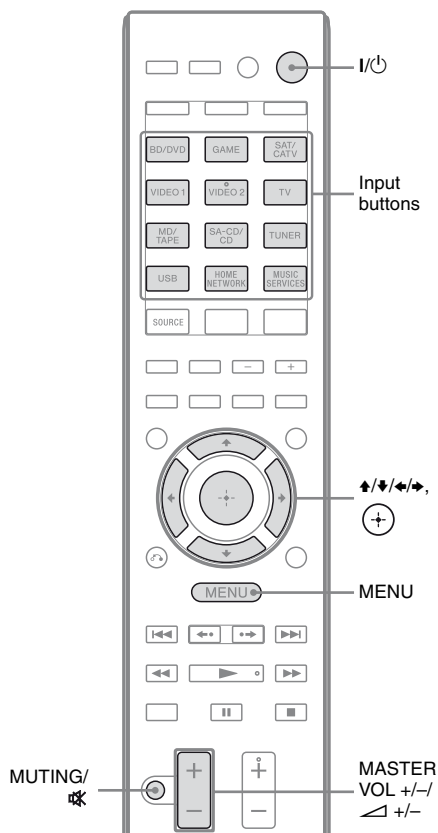


1 Press MENU.

The menu is displayed on the TV screen.

2 Press $\uparrow/\downarrow$ repeatedly to select “Settings”, then press $\odot$ or $\rightarrow$.


The Settings menu list appears on the TV screen.

- 3** Press $\uparrow/\downarrow$ repeatedly to select “Auto Cal.”, then press $\odot$ or $\rightarrow$.



- 4** Press $\leftarrow/\rightarrow$ repeatedly to select “Standard”, then press $\odot$.

The calibration type is automatically set to “Engineer”.




- 5** Press $\odot$ to select “START”.

- 6** The measurement starts in five seconds.

The measurement process will take approximately 30 seconds with a test tone.

When the measurement ends, a beep sounds and the screen switches.



Note

If an error code appears on the screen, see “Message list after Auto Calibration measurement” (page 42).

- 7** Press $\uparrow/\downarrow$ repeatedly to select the item you want, then press $\odot$.

- **Retry:** Performs the Auto Calibration again.
- **Save:** Save the measurement results and exits the setting process.
- **Warning:** Displays warning related to the measurement results. See “Message list after Auto Calibration measurement” (page 42).
- **Exit:** Exits the setting process without saving the measurement results.

- 8** Save the measurement result.

Select “Save” in step 7.

Notes

- You can select the calibration type you want by using the “Custom” Auto Calibration (page 43).
- The A.P.M. (Automatic Phase Matching) function is activated after you save the measurement result.
- The A.P.M. (Automatic Phase Matching) function does not work in the following cases.
 - The calibration type is set to “Off” when using the “Custom” Auto Calibration (page 43).
 - When Dolby TrueHD or DTS-HD signals with a sampling frequency of more than 48 kHz are being received.

- 9** Disconnect the optimizer microphone from the receiver.

Note

If you reposition your speaker, we recommend that you perform Auto Calibration again to enjoy the surround sound.

Tips

- You can change the unit of distance in “Distance Unit” in the Speaker settings menu (page 94).
- The size of a speaker (“Large”/“Small”) is determined by the low frequency characteristics. The measurement results may vary, depending on the position of the optimizer microphone and speakers, and the shape of the room. It is recommended that you apply the measurement results. However, you can change those settings in the Speaker Settings menu. Save the measurement results first, then try to change the settings.

continued

To cancel Auto Calibration

The Auto Calibration function will be canceled when you perform the following during the measurement process:

- Press I/⏻.
- Press the input buttons on the remote control or turn the INPUT SELECTOR on the receiver.
- Press MUTING or 🔊.
- Press SPEAKERS on the receiver.
- Change the volume level.
- Connect the headphones.
- Press SHIFT, then press AUTO CAL.

Checking the Auto Calibration results

To check error code or warning message obtained in “Performing Auto Calibration” (page 40), proceed with the following steps.

Press ⬆/⬆ to select “Warning” in step 7 in “Performing Auto Calibration” (page 41) then press



If a warning message appears, check the message and use the receiver without change. Or if necessary, perform Auto Calibration again.

When “Error Code” appears

Check the error and perform Auto Calibration again.

- 1 Press ⊕ to select “ENTER”.
“RETRY ?” appears on the TV screen.
- 2 Press ⬅➡ to select “YES”, then press ⊕.
- 3 Repeat steps 6 to 9 in “Performing Auto Calibration” (page 40).

Message list after Auto Calibration measurement

Display and explanation

Error Code 31

The SPEAKERS is set to off. Set to other speaker settings and perform the Auto Calibration again.

Error Code 32

None of the speakers were detected. Make sure that the optimizer microphone is connected properly and perform the Auto Calibration again.

If the optimizer microphone is connected properly but the error code still appears, the optimizer microphone cable may be damaged.

Error Code 33

- None of the front speakers are connected or only one front speaker is connected.
- The optimizer microphone is not connected.
- Either the surround left or surround right speaker is not connected.
- Surround back speakers or front high speakers are connected even though surround speakers are not connected. Connect the surround speaker(s) to the SPEAKERS SURROUND terminals.
- The surround back speaker is connected only to the SPEAKERS SURROUND BACK/FRONT B R terminals. When you connect only one surround back speaker, connect it to the SPEAKERS SURROUND BACK/FRONT HIGH/BI-AMP/FRONT B L terminals.
- Either the front left high or front right high speaker is not connected.

Warning 40

The measurement process has completed with high noise level detection. You may be able to achieve better results if you try in a quiet environment again.

Warning 41

Warning 42

The input from the microphone is too big.

- The distance between the speaker and the microphone may be too close. Set them apart and perform the measurement again.

Warning 43

The distance and position of a subwoofer cannot be detected. This may be caused by noise. Try to perform the measurement in a quiet environment.

No Warning

There is no warning information.

Tip

Depending on the position of the subwoofer, the measurement results may vary. However, there will be no problems even if you continue to use the receiver with that value.

Customizing the Auto Calibration

You can customize the Auto Calibration by selecting the calibration type you want.

1 Press MENU.

The menu is displayed on the TV screen.

2 Press $\uparrow/\downarrow$ repeatedly to select “Settings”, then press $\odot$ or $\rightarrow$.

The Settings menu list appears on the TV screen.

3 Press $\uparrow/\downarrow$ repeatedly to select “Auto Cal.”, then press $\odot$ or $\rightarrow$.

4 Press $\leftarrow/\rightarrow$ repeatedly to select “Custom”, then press $\odot$.

5 Press $\uparrow/\downarrow$ repeatedly to select the calibration type you want, then press $\odot$.

- **Full Flat:** Makes the measurement of frequency from each speaker flat.
- **Engineer:** Sets to “the Sony listening room standard” frequency characteristics.
- **Front Reference:** Adjusts the characteristics of all the speakers to match the characteristics of the front speaker.
- **Off:** Sets the Auto Calibration equalizer level and the A.P.M. (Automatic Phase Matching) function to off.

Note

Set the calibration type to “Off” if you want to decode DTS 96/24 audio format.


6 Press $\odot$ to confirm the selected calibration type.

7 Repeat steps 5 to 9 in “Performing Auto Calibration” (page 40).

Configuring the network settings of the receiver

The network settings for the receiver must be set correctly to use the network functions of the receiver.

The procedure used to set up the IP address automatically (DHCP) is explained below. In this case, the router that is connected to the receiver or the Internet provider must support DHCP.

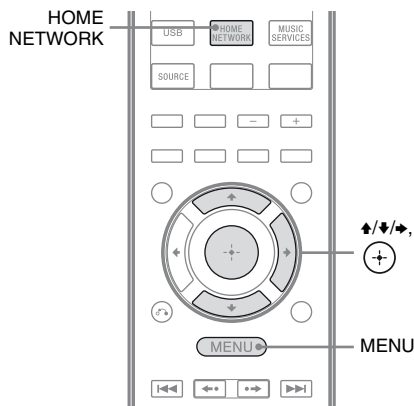

1 Press HOME NETWORK to select the Home Network function.

2 Press MENU.

The menu is displayed on the TV screen.

3 Press $\uparrow/\downarrow$ repeatedly to select “Settings”, then press $\odot$ or $\rightarrow$.

4 Press $\uparrow/\downarrow$ repeatedly to select “Network”, then press $\odot$.

5 Press $\uparrow/\downarrow$ repeatedly to select “Settings”, then press $\odot$.

6 Press $\uparrow/\downarrow$ repeatedly to select “Auto”, then press $\odot$.

continued

- 7 Press $\blacktriangle/\blacktriangledown$ repeatedly to select “Do Not Use”, then press $\oplus$.**
The confirmation display appears on the TV screen.

- 8 Press $\blacktriangle/\blacktriangledown$ repeatedly to select “OK”, then press $\oplus$.**
“Connecting” appears on the TV screen.
“Complete!” appears after the network settings are completed, then press $\oplus$.
The display returns to the Network Settings menu. (Depending on the network environment, the network settings may take some time.)
If “No Connection” is displayed, perform the process referring to “Network Settings menu” (page 99).

- 9 Perform the server settings.**
To listen to audio content stored on the server, you need to set up your server (page 69).

To set the network settings manually

See “To set the IP address manually” (page 99) or “To set the Proxy server manually” (page 99).


Tip

When checking the network settings, see “To check the network information” (page 99).

Guide to on-screen display operation


You can display the menu of the receiver on the TV screen and select the function you want to use on the TV screen by pressing $\blacktriangle/\blacktriangledown/\blacktriangleleft/\blacktriangleright$ and $\oplus$ on the remote control.

To display the menu of the receiver on the TV screen, make sure that the receiver is in “GUI MODE” following the steps in “To turn “GUI MODE” on and off” (page 45).

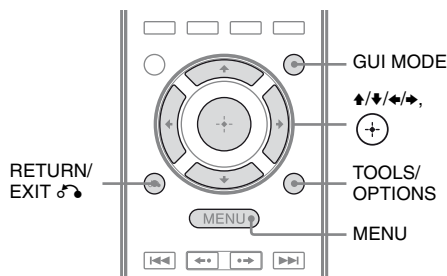

Using the menu


- 1 Switch the input of the TV so that an image of the menu is displayed.**
- 2 Press MENU.**
The menu is displayed on the TV screen.



- 3 Press **▲/▼** repeatedly to select a menu you want, then press **⊕** or **➡** to enter the menu.

The menu item list appears on the TV screen.

Example: When you select “**Input**”.



- 4 Press **▲/▼** repeatedly to select the menu item you want to adjust, then press **⊕** to enter the menu item.

- 5 Repeat steps 3 and 4 to select the parameter you want.

To return to the previous screen

Press RETURN/EXIT **↶**.

To exit the menu

Press MENU.

To turn “GUI MODE” on and off

Press GUI MODE. “GUI ON” or “GUI OFF” appears on the display panel, depending on the mode selected.

Overview of the main menus


Menu icon	Description
 Input	Selects the input source equipment connected to the receiver (page 46).
 Music	Selects the music from the server on the Home Network (page 73), Music Services (page 75), iPhone/iPod (page 50) or USB device (page 52).
 Video	Selects the video from iPhone/iPod (page 50).
 FM/AM/SR	Selects the built-in FM/AM radio (page 55) or satellite tuner connected (page 58).
 Settings	You can adjust the settings of the speakers, the surround effect, equalizer, audio, video and other inputs connected to the HDMI jacks (page 91).

Using the option menus

When you press TOOLS/OPTIONS, the option menus for the selected main menu are displayed. You can select a related function without reselecting the menu.

- 1 Press MENU.


The menu is displayed on the TV screen.



- 2** Press $\uparrow/\downarrow$ repeatedly to select a menu you want, then press $\odot$ or $\rightarrow$ to enter the menu.


The menu item list appears on the TV screen.

Example: When you select “ Input”.



- 3** Press **TOOLS/OPTIONS** while the menu item list is displayed.

The option menu appears.



- 4** Press $\uparrow/\downarrow$ repeatedly to select the option menu item you want, then press $\odot$ or $\rightarrow$.


- 5** Press $\uparrow/\downarrow$ repeatedly to select the parameter you want, then press $\odot$.

To exit the option menu

Press **MENU**.

Basic Operations

Playing an input source equipment

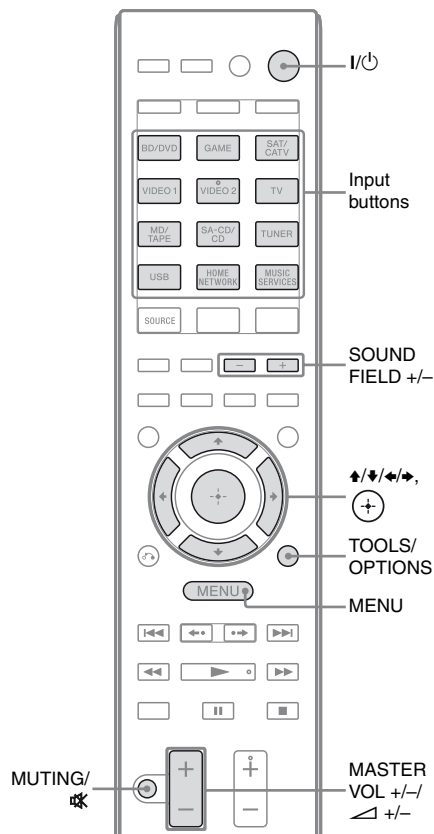

- 1** Press **MENU**.

The menu is displayed on the TV screen.

- 2** Select “ Input”, then press $\odot$ or $\rightarrow$.

The menu item list appears on the TV screen.

3 Select the equipment you want, then press .

The menu screen disappears and the playback screen of the external input appears.

The input that can be selected:

- **BD/DVD:** Blu-ray Disc player or DVD player, etc., connected to the BD/DVD jack.
- **GAME:** PlayStation 3, etc., connected to the GAME jack.
- **SAT/CATV:** Satellite tuner, etc., connected to the SAT/CATV jack.
- **VIDEO 1, VIDEO 2:** VCR, etc., connected to the VIDEO 1 or VIDEO 2 jack.
- **TV:** TV connected to the TV jack.
- **MD/TAPE:** MD deck, Tape deck, etc., connected to the MD/TAPE jack.
- **SA-CD/CD:** Super Audio CD or CD player, etc., connected to the SA-CD/CD jack.

4 Turn on the equipment and start playback.

5 Press MASTER VOL +/- or +/- to adjust the volume.

You can also use MASTER VOLUME on the receiver.

6 Press SOUND FIELD +/- to enjoy the surround sound.

You can also use 2CH/A.DIRECT, A.F.D., MOVIE (HD-D.C.S.) or MUSIC button on the receiver.

For details, see page 64.

Tips

- You can turn INPUT SELECTOR on the receiver or press input buttons on the remote control to select the equipment you want.
- You can adjust the volume differently depending on the speed you turn the MASTER VOLUME on the receiver.
To turn the volume up or down quickly: turn the knob quickly.
To make fine adjustment: turn the knob slowly.
- You can adjust the volume differently depending on the length of time you press and hold the MASTER VOL +/- or  +/- on the remote control.
To turn the volume up or down quickly: press and hold the button.
To make a fine adjustment: press the button and release it immediately.

To activate the muting function

Press MUTING or .

The muting function will be canceled when you do the following.

- Press MUTING or  again.
- Increase the volume.
- Turn off the receiver.
- Perform Auto Calibration.

To avoid damaging your speakers

Before you turn off the receiver, be sure to turn down the volume level.

Naming the input (Name Input)

You can enter a name of up to 8 characters for inputs and display it.

It is more recognizable having the equipment named on the display than the jacks.

1 Select the input you want to name from “ Input” screen.

2 Press **TOOLS/OPTIONS**.

The option menu appears.

3 Select “Name Input”, then press  or .

4 Press / repeatedly to select a character, then press .

You can move the input position backward and forward by pressing /.

5 Repeat step 4 to input a character one by one, then press .

The name you entered is registered.

Playing an iPhone/iPod

You can enjoy music/video contents from the iPhone/iPod by connecting it to the iPhone/iPod terminals on the receiver.

For details on connecting the iPhone/iPod, see page 29, 32.

Compatible iPod/iPhone models

You can use the following iPod/iPhone models on this receiver. Update your iPod/iPhone with the latest software before using it.



iPod touch
4th generation



iPod touch
3rd generation



iPod touch
2nd generation



iPod touch
1st generation



iPod nano
6th generation



iPod nano
5th generation
(video camera)



iPod nano
4th generation
(video)



iPod nano
3rd generation
(video)



iPod nano
2nd generation
(aluminum)



iPod classic



iPhone 4



iPhone 3GS



iPhone 3G



iPhone

Notes


- Sony cannot accept responsibility in the event that data recorded to iPod/iPhone is lost or damaged when using an iPod/iPhone connected to this receiver.
- This product has been designed specifically to work with iPod/iPhone and has been certified to meet Apple performance standards.

Selecting the iPhone/iPod control mode

You can select the iPhone/iPod control mode using the GUI menu or iPhone CTRL on the remote control.

You can use the GUI menu to browse contents on the iPhone/iPod.

You can also control all operations by viewing the information on the display panel when "GUI MODE" is turned off.

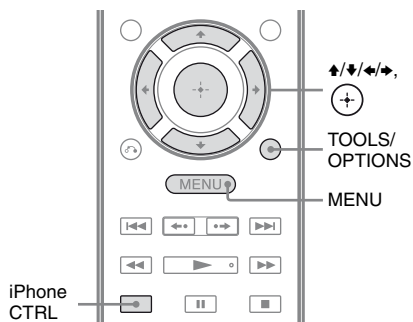

1 Press MENU.

The menu is displayed on the TV screen.

2 Select "🎵 Music" or "📺 Video", then press $\odot$ or $\rightarrow$.

When the iPhone or iPod is connected, "iPhone/iPod" appears on the TV screen.

3 Select "iPhone/iPod", then press TOOLS/OPTIONS.

The option menu appears.

4 Select "System GUI" or "iPod", then press $\odot$.

Operating the iPhone/iPod using "System GUI" mode

1 Make sure that "System GUI" is selected in step 4 in "Selecting the iPhone/iPod control mode" (page 50).

2 Select "iPhone/iPod", then press $\odot$.

3 Select the content you want from the contents list, then press $\odot$.

The selected content starts playback and the information of music/video contents appears on the TV screen.

Note

The video signals from iPhone/iPod are up converted on this receiver and then viewed on your TV, depending on the status of the video signal output.

For details, see "Function for conversion of video signals" (page 31).

To select the playback mode

You can change the playback mode using the TOOLS/OPTIONS on the remote control.

- Repeat: Off / One / All
- Shuffle: Off / Songs / Albums
- Audiobooks: Slower / Normal / Faster

Operating the iPhone/iPod using "iPod" mode

1 Make sure that "iPod" is selected in step 4 in "Selecting the iPhone/iPod control mode" (page 50).


2 Select "iPhone/iPod", then press $\odot$.

3 Select the content you want using iPhone/iPod menu.

For details on operating the iPhone/iPod, refer to the operating instructions supplied with iPhone/iPod.

To operate the iPhone/iPod using the remote control

You can operate the iPhone/iPod using the following buttons on the remote control of the receiver.

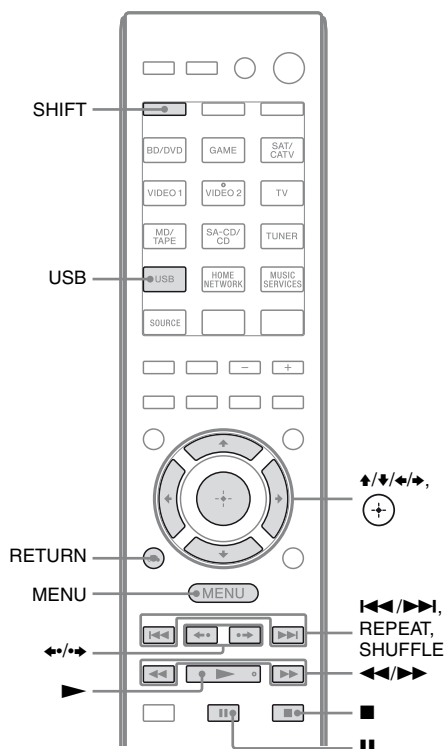

Press USB before you use the following buttons.

Press	Operation
	Starts play.
	Pauses play.
	Fast reverses or forwards.
	Goes to the previous/next file.
	Skips to the previous/next album.
	Enters the selected item.
MENU, RETURN,	Returns to previous display/folder hierarchy.
	Selects the previous/next item.
REPEAT*	Enters repeat mode.
SHUFFLE*	Enters shuffle mode.

* Press SHIFT, then press this button.

Notes on iPhone/iPod

- The iPhone/iPod is charged when connected to the receiver while the receiver is turned on.
- You cannot transfer songs onto the iPhone/iPod.
- Do not remove the iPhone/iPod during operation. To avoid data corruption or damage to the iPhone/iPod, turn the receiver off when connecting or removing the iPhone/iPod.

iPhone/iPod message list

Message and explanation

Reading

The receiver is recognizing and reading information of the iPhone or iPod.

Loading

The receiver is loading information of the iPhone or iPod.

No Support

An unsupported iPhone or iPod is connected.

No Device

No iPhone or iPod is connected.

No Music/No Video

No music or video was found.

HP No Support

No sound is output from the headphones when iPhone or iPod is connected.

Playing a USB device

You can enjoy music from the USB device by connecting it to the  (USB) port on the receiver.

For details on connecting a USB device, see “Connecting an iPhone, iPod, USB device” (page 32).

The music file formats that can be played back by this receiver are as follows:

File format	Extensions
MP3 (MPEG-1 Audio Layer III)	“.mp3”
AAC*	“.m4a”, “.3gp”, “.mp4”
WMA9 Standard*	“.wma”

* The receiver does not play files encoded with DRM.

Compatible USB devices

You can use the following Sony USB devices on this receiver. Other USB devices cannot be used on this receiver.

Verified Sony USB device


Product name	Model name
Walkman®	NWZ-S754 / S755
	NWZ-E453 / E454 / E455
	NWZ-E353 / E354 / E355
	NWZ-B133 / B135 / B133F / B135F
	NWZ-B142 / B143 / B142F / B143F
	NWD-E023F / E025F
	NWZ-E435F / E436F / E438F
	NWZ-E343 / E344 / E345
	NWZ-S636F / S638F / S639F
	NWZ-S736F / S738F / S739F
	NWZ-A726 / A728 / A729 / A726B / A728B
	NWZ-A826 / A828 / A829
	NWZ-W202

Product name	Model name
	NWZ-X1050 / X1060
	NWZ-S744 / S745
	NWZ-E443 / E444 / E445
	NWZ-S543 / S544 / S545
	NWZ-A844 / A845 / A846 / A847
	NWZ-W252 / W253
	NWZ-B152 / B153 / B152F / B153F
MICROVAULT	USM1GL / 2GL / 4GL / 8GL / 16GL
	USM1GLX / 2GLX / 4GLX / 8GLX / 16GLX

Notes

- The receiver is unable to read data in NTFS format.
- The receiver is unable to read data other than that saved in the first partition of a hard disk drive.
- Do not use USB devices other than these USB devices. Operation of models not listed here is not guaranteed.
- Operation may not always be ensured even when using these USB devices.
- Some of these USB devices may not be available for purchase in certain areas.
- When formatting the above models, be sure to format using the model itself or the dedicated formatting software for that model.
- When connecting a USB device to the receiver, be sure to connect after the display “Creating Library” or “Creating Database” on the USB device has disappeared.

Operating the USB device



1 Press MENU.

The menu is displayed on the TV screen.

2 Select “ Music”, then press or .

When the USB device is connected, “USB” appears on the TV screen.

3 Select “USB”, then press .

You can operate the USB device using the remote control of the receiver.

The information of music contents appear on the TV screen.


To select the playback mode

You can change the playback mode using the TOOLS/OPTIONS on the remote control.

- Repeat: Off / One / All / Folder

To operate the USB device using the remote control

You can operate the USB device using the following buttons on the remote control of the receiver.

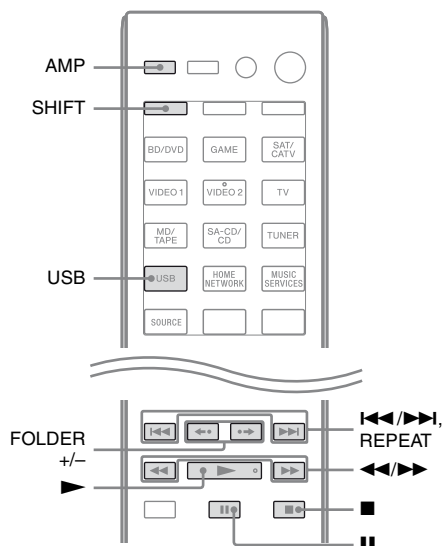

Press USB or AMP before you use the following buttons.

Press	Operation
	Starts play.
	Pauses play.
	Stops play.
	Fast reverses or forwards.
	Goes to the previous/next file.
FOLDER +/-	Goes to the previous/next folder.
REPEAT*	Enters repeat mode.

* Press SHIFT, then press this button.

Notes on the USB device

- When USB cable connection is necessary, connect the USB cable supplied with the USB device to be connected. Refer to the operating instructions supplied with the USB device to be connected for details on the operation method.
- Do not connect the receiver and the USB device through a USB hub.
- When the USB device is connected, “Reading” appears.
- It may take about 10 seconds before “Reading” appears depending on the type of USB device connected.
- When the USB device is connected, the receiver reads all the files on the USB device. If there are many folders or files on the USB device, it may take a long time to finish reading the USB device.
- The receiver can recognize up to
 - 100 folders (including “ROOT” folder).
 - 100 audio files for each folder.
 - 8 folder levels (tree structure of files, including “ROOT” folder).

The maximum number of audio files and folders may vary depending on the file and folder structure.

Do not save other types of files or unnecessary folders on a USB device.

- Compatibility with all encoding/writing softwares, recording devices, and recording media cannot be guaranteed. Incompatible USB device may produce noise or interrupted audio or may not play at all.
- Some time may be needed to start playback when:
 - the folder structure is complex.
 - the memory capacity is excessive.
- This receiver does not necessarily support all the functions provided in a connected USB device.
- The playback order for the receiver may differ from the playback order of the connected USB device.
- Folders that have no audio files are skipped.
- When playing a very long track, some operations may cause playback delay.

USB message list

Message and explanation

Reading

The receiver is recognizing and reading information of the USB device.

Device Error

The memory of the USB device could not be recognized (page 52).

No Support

An unsupported USB device is connected, an unknown device is connected, or the USB device is connected through a USB hub (page 52).

No Device

No USB device is connected.

No Track

No track was found.

Recording using the receiver

You can record from an audio equipment (e.g., CD recorder) or video equipment (e.g., VCR, DVD recorder) using the receiver. Refer to the operating instructions supplied with your recording equipment.

1 Press one of the input buttons to select the playback equipment that you want to record.

You can also use INPUT SELECTOR on the receiver.

2 Prepare the playback equipment for playing.

Example 1 (audio recording):

Tune to the radio station you want to record.

Example 2 (video recording):

Insert the video tape you want to copy into the VCR.

3 Prepare the recording equipment.

Example 1 (audio recording):

Insert a blank MD or tape into the recording deck and adjust the recording level.

Example 2 (video recording):

Insert a blank video tape, etc. into the recording equipment (connected to VIDEO 1 OUT jacks) for recording.

4 Start recording on the recording equipment, then start the playback equipment.

Notes

- Some sources contain copyright protection to prevent recording. In this case, you may not be able to record from the source.
- Only analog input signals are output from the analog output jack (for recording).
- HDMI sound cannot be recorded.
- While only composite video signals are being recorded, the auto standby function of the receiver may start up and interrupt the recording. In this case, set the “Auto Standby” to “OFF” (page 102).

Tuner Operations

Listening to FM/AM radio


You can listen to FM and AM broadcasts through the built-in tuner. Before operation, be sure you have connected the FM and AM antennas (aerials) to the receiver (page 33).

Tip

The tuning scale for direct tuning is shown below.

Area	FM	AM
USA, Canada	100 kHz	10 kHz*
Europe, Australia	50 kHz	9 kHz

* The AM tuning scale can be changed (page 56).

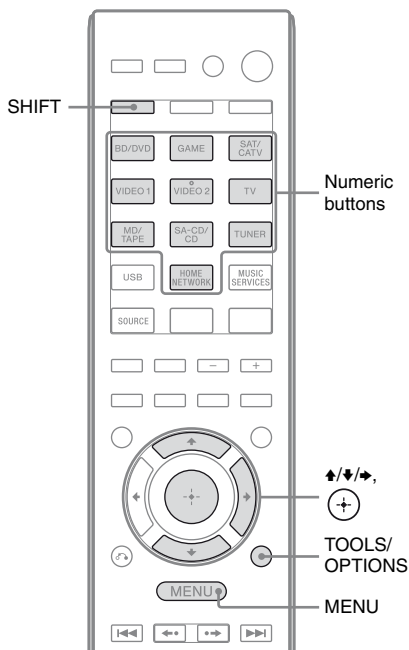

1 Press MENU.

The menu is displayed on the TV screen.

2 Select “FM” or “AM” from the menu, then press $\oplus$ or $\rightarrow$.

The FM or AM menu list appears on the TV screen.

Tuning to a station automatically (Auto Tuning)

1 Select “Auto Tuning”, then press $\oplus$ or $\rightarrow$.

2 Press $\uparrow/\downarrow$.

Press $\uparrow$ to scan from low to high, press $\downarrow$ to scan from high to low.

The receiver stops scanning whenever a station is received.

In case of poor FM stereo reception

1 Tune in the station you want to listen to using Auto Tuning, Direct Tuning (page 55), or select the preset station you want (page 56).

2 Press TOOLS/OPTIONS.

3 Select “FM Mode”, then press $\oplus$ or $\rightarrow$.

4 Select “MONO”, then press $\oplus$.

Tuning to a station directly (Direct Tuning)

You can enter the frequency of a station directly by using the numeric buttons.

1 Select “Direct Tuning”, then press $\oplus$ or $\rightarrow$.

2 Press SHIFT, then press numeric buttons to enter the frequency.

Example 1: FM 102.50 MHz

Select 1 $\rightarrow$ 0 $\rightarrow$ 2 $\rightarrow$ 5 ($\rightarrow$ 0*)

Example 2: AM 1,350 kHz

Select 1 $\rightarrow$ 3 $\rightarrow$ 5 $\rightarrow$ 0

* Press 0 for Europe and Australia models only.

Tip

Adjust the direction of the AM loop antenna (aerial) for optimum reception upon tuning to an AM station.

3 Press .

If you cannot tune to a station


“---.--- MHz” appears and then the screen returns to the current frequency.

Make sure you have entered the right frequency. If not, repeat step 2. If you still cannot tune to a station, the frequency may not be in use in your area.

Changing the AM tuning scale

(USA and Canada models only)

You can change the AM tuning scale to either 9 kHz or 10 kHz using the buttons on the receiver.

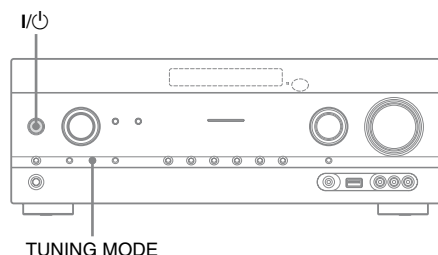

1 Press I/⏻ to turn off the receiver.

2 While holding down TUNING MODE, press I/⏻ on the receiver.

The current AM tuning scale is changed to 9 kHz (or 10 kHz).

To reset the scale to 10 kHz (or 9 kHz), repeat the procedure above.


Notes

- Depending on the settings, the receiver may take some time to change the AM tuning scale.
- All preset stations will be erased when you change the tuning scale.

Presetting FM/AM radio stations

(Preset Tuning)

You can store up to 30 FM and 30 AM stations as your favorite stations.



1 Tune to the station that you want to preset using Auto Tuning (page 55) or Direct Tuning (page 55).

2 Press TOOLS/OPTIONS.

The option menu appears.

3 Select “Memory”, then press or .

4 Select a preset number, then press .

The station is stored as the selected preset number.

5 Repeat steps 1 to 4 to store another station.

You can store station as follows:

- AM band: AM 1 to AM 30
- FM band: FM 1 to FM 30

Tuning to preset stations

- 1** Select “ FM” or “ AM” from the menu, then press  or .
- 2** Select the preset station you want.
Preset numbers from 1 to 30 are available.

Naming preset stations (Name Input)

- 1** On “ FM” or “ AM” screen, select the preset number which you want to name.
 - 2** Press **TOOLS/OPTIONS**.
The option menu appears.
 - 3** Select “Name Input”, then press  or .
 - 4** Press / repeatedly to select a character, then press .
 - 5** Repeat step 4 to input a character one by one, then press .
- The name you entered is registered.

Receiving RDS broadcasts

(Europe and Australia models only)

This receiver allows you to use Radio Data System (RDS), which enables radio stations to send additional information along with the regular programming signal. This receiver offers convenient RDS features, such as Program Service name display. RDS is available only for FM stations.*

* Not all FM stations provide RDS service, nor do they provide the same type of services. If you are not familiar with the RDS services in your area, check with your local radio stations for details.

Simply select a station on the FM band.

When you tune to a station that provides RDS services, “RDS” lights up and the Program Service name* appears on the TV screen and the display panel.

* If an RDS broadcast is not received, a Program Service name will not appear.

Notes

- RDS may not work properly if the station you tuned to is not transmitting the RDS signal or if the signal strength is weak.
- Some letters that can be displayed on the TV screen cannot be displayed on the display panel.

Tip

While a Program Service name is displayed, you can check the frequency by pressing **DISPLAY** repeatedly (page 108).

Listening to Satellite Radio

(USA and Canada models only)

To listen to Satellite Radio on your Sirius-Ready® receiver, you'll need to add a Sirius Satellite Radio tuner (sold separately). Sirius Satellite Radio is available to residents of the United States (except Alaska and Hawaii), Puerto Rico and Canada.

Satellite Radio delivers an incredible variety of commercial-free music including Pop, Rock, Country, R&B, Hip-Hop, Jazz, Classical and much more, plus coverage of all the top professional and college sports, including play-by-play and expert sports talk and analysis. You also get exclusive entertainment, talk, comedy, family programming, local traffic and weather and news from your most trusted sources.


After you purchase a Sirius tuner, you'll need to activate and subscribe to the service to listen to Satellite Radio. Easy-to-follow installation and setup instructions are provided with the satellite tuners. There are a variety of programming packages available, including the option of adding "The Best of XM" programming to your Sirius tuner, enabling you to enjoy the most popular programming among both services. "The Best of XM" package is not available to Sirius Canada subscribers at this time.

Family friendly packages are also available to restrict channels that feature mature programming.

To subscribe to Sirius, U.S. customers should visit www.sirius.com or call 1-888-539-SIRIUS (1-888-539-7474). Canadian customers should visit www.siriuscanada.ca.

Connecting a satellite radio tuner


Connect the SiriusConnect Home tuner. When you use the SiriusConnect Home tuner with this receiver, be sure to connect the AC power adaptor supplied with the tuner to a wall outlet.

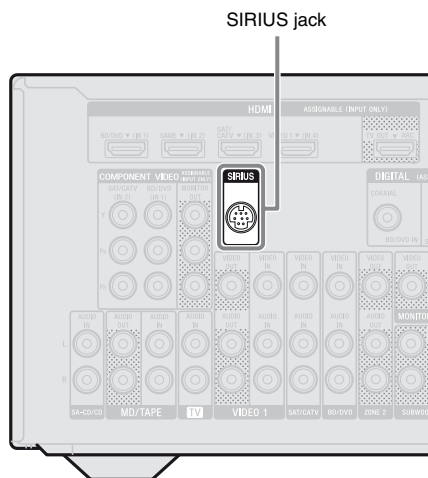

Note

Keep the SiriusConnect Home tuner, antenna, and AC power adaptor away from the speaker cords and the power cord to avoid picking up noise.

Preparing to listen to a satellite radio

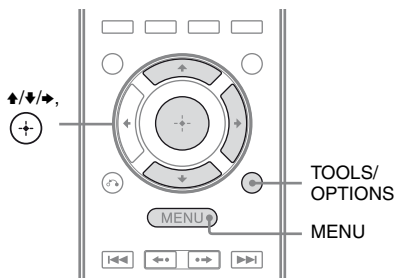

1 Press MENU.

The menu is displayed on the TV screen.

2 Select “SR”, then press or .

3 Press TOOLS/OPTIONS.

The option menu appears.

Checking the ID number

1 Select “Sirius ID” from the option menu, then press .

2 Check the Sirius ID on the TV screen and write it in the space provided here.

Sirius ID: _____

You can also check the Sirius ID using the display panel on the receiver.

Checking receiving conditions (Antenna Aiming)

1 Select “Antenna Aiming” from the option menu, then press




2 While checking the quality of the reception, adjust the direction of the antenna to obtain the best reception.

To exit the menu

Press MENU.

Selecting a channel of the satellite radio

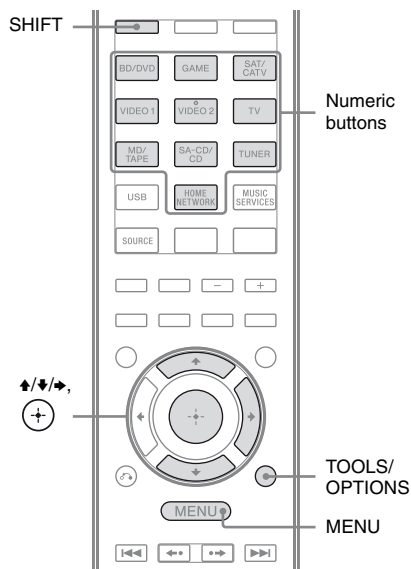

1 Press MENU.

The menu is displayed on the TV screen.

2 Select “SR”, then press or .

Selecting a channel by category (Category Mode)

You can select a channel from one category or all the categories.

1 Select the category, then press



- All: You can select a channel from all the categories.
- (category name): You can select a channel from one category.

Note

When the “Preset Mode” screen is displayed, press TOOLS/OPTIONS, then press  repeatedly to select “Category Mode”.

2 Select the channel, then press



The selected channel is being received.
The channel information is displayed on the TV screen.

Note

When you select a channel in the “Category Mode”, the channel you selected may not be the one in the category you want. This is because one channel may belong to more than one category.

Selecting a channel by inputting the channel number directly (Direct Tuning)

You can enter the channel number directly by using the numeric buttons.

1 Press TOOLS/OPTIONS.

The option menu appears.

2 Select “Direct Tuning”, then press .


3 Press SHIFT, then press the numeric buttons to enter the channel number.

4 Press .

The selected channel is tuned in.

Presetting satellite radio channels

You can store up to 30 SIRIUS Satellite Radio channels as your favorite channels.

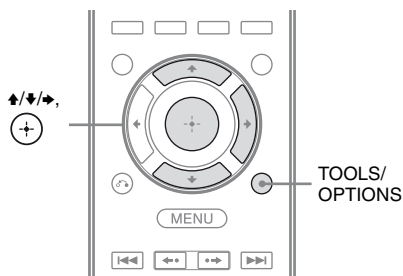

1 Select a channel you want to preset using Category Mode (page 60) or Direct Tuning (page 60).

2 Press TOOLS/OPTIONS.

The option menu appears.

3 Select “Memory”, then press



The preset number selection screen appears.

4 Select the preset number you want to use as the preset channel, then press .

Preset channels from 1 to 30 are available, and a default channel is preset for all the preset channels when you purchase the receiver.

The selected channel is registered as the preset channel you selected in step 1.

5 Repeat steps 1 to 4 to store another channel.

Selecting preset channels


- 1 Select “**SR**” from the menu, then press **+** or **→**.
- 2 Select the preset number from the preset list, then press **+**.
You can select stored preset channels from 1 to 30.

Notes

- The channel information you have preset may be changed if Sirius XM Radio Inc. change its channel programming.
- When the “Category Mode” screen is displayed, press **TOOLS/OPTIONS**, then press **↑/↓** repeatedly to select “Preset Mode”.

Restricting access to specific channels (Parental Lock)

You can restrict access to certain channels using your own lock code. The lock code is set to “0000” as the default.
Change the lock code before you use this function for the first time. See “To change the lock code (Lock Code)” (page 62).

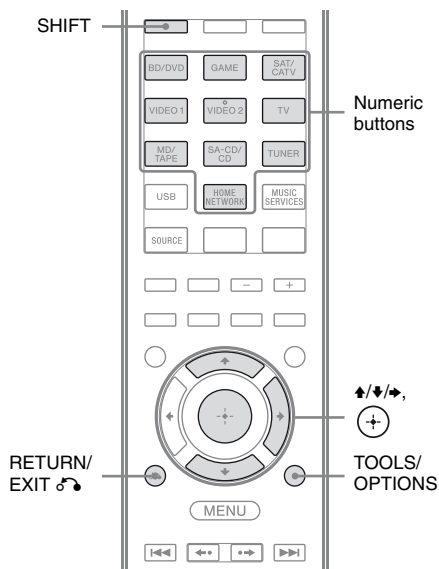

- 1 Select a channel you want to lock using **Category Mode** (page 60) or **Direct Tuning** (page 60).
- 2 Press **TOOLS/OPTIONS**.
The option menu appears.
- 3 Select “**Parental Lock**”, then press **+** or **→**.
- 4 Select “**ON**”, then press **+**.
“Enter your 4-digit lock code.” appears.

5 Press SHIFT, then press the numeric buttons to enter your 4-digit lock code.

“The channel has been locked.” appears and the Parental Lock is set.

To delete the numbers you have entered, go back to step 2 by pressing RETURN/EXIT , and then repeat the procedure above from step 2.

To change the lock code (Lock Code)

- 1** Select a channel you want to change the lock code using Category Mode (page 60) or Direct Tuning (page 60).
- 2** Press TOOLS/OPTIONS.
The option menu appears.
- 3** Select “Lock Code”, then press .
“Enter your 4-digit lock code.” appears.
- 4** Press SHIFT, then press the numeric buttons to enter your 4-digit lock code.
“Enter a new lock code.” appears.
- 5** Enter a new 4-digit lock code using the numeric buttons.
“To confirm, enter your new lock code again.” appears.
- 6** Reenter the new lock code with the numeric buttons.
“The lock code has been changed.” appears.

To listen to the locked channels

- 1** Select a locked channel you want to listen to using Direct Tuning (page 60).
“Enter your 4-digit lock code.” appears.
- 2** Press SHIFT, then press the numeric buttons to enter your 4-digit lock code.
The channel is tuned in.

To cancel the Parental Lock

- 1** Select a channel you want to unlock using Direct Tuning (page 60).
- 2** Press TOOLS/OPTIONS.
The option menu appears.
- 3** Select “Parental Lock”, then press  or .
- 4** Select “OFF”, then press .
“Enter your 4-digit lock code.” appears.
- 5** Press SHIFT, then press the numeric buttons to enter your 4-digit lock code.
“The channel has been unlocked.” appears and the channel is unlocked.

Notes

- When you select a channel using Category Mode, locked channels are skipped.
- When the receiver is reset to the default settings, the lock code returns to the default (0000), but the Parental Lock settings are not removed.
- You cannot preset locked channels. If you set the Parental Lock for a preset channel, the preset information for that channel returns to the default.
- You cannot set the Parental Lock for channel 0 and channel 184.
- You can set only one lock code on the receiver. You cannot set individual lock codes for each channel.


Satellite radio message list

Message appears on TV screen [Display]	Explanation	Remedies
Antenna [ANTENNA]	The antenna is not connected properly.	Check the connection between the SiriusConnect Home tuner and the antenna.
Acquiring [ACQUIRING]	The receiving condition is not good.	Try moving the antenna to another location. For details about the antenna location, refer to the operating instructions supplied with the SiriusConnect Home tuner.
UNSUB CH [CALL 888-539-SIRI]	You have not subscribed for the selected channel.	—
SR Tuner [SR TUNER]	The SiriusConnect Home tuner is not connected properly.	Check all the connections, and then turn the system on again. Also make sure if the AC adaptor supplied with the SiriusConnect Home tuner is connected to a wall socket.
Invalid [INVALID]	You have entered an invalid channel number.	The channel to be tuned-in is void due to the change by the broadcast service, or the receiving condition is not good.
Locked CH [LOCKED CH]	The selected channel is locked.	—
SUB UPDT [SUB UPDT]	The subscription information has been updated.	—
Updating [UPDATING]	Channel information is being updated.	—
FW UPDT [FW UPDT]	The SiriusConnect Home tuner firmware is being updated.	—
----	There is no text information in the channel.	This is not an error. The text information may not be displayed depending on the system condition, for example, right after the system has received a channel.

Enjoying Surround Sound

Selecting the sound field

This receiver can create multi channel surround sound. You can select one of the optimized sound fields from the receiver's pre-programmed sound fields.



Press SOUND FIELD +/- repeatedly to select the sound field you want.

You can also use 2CH/A.DIRECT, A.F.D., MOVIE (HD-D.C.S.) or MUSIC on the receiver.

2 channel sound mode

You can switch the output sound to 2 channel sound regardless of the recording formats of the software you are using, the playback equipment connected, or the sound field settings of the receiver.

■ 2CH ST. (2ch Stereo)

The receiver outputs the sound from the front left/right speakers only. There is no sound from the subwoofer.

Standard 2 channel stereo sources completely bypass the sound field processing and multi channel surround formats are downmixed to 2 channel.

■ A. DIRECT (Analog Direct)

You can switch the audio of the selected input to 2 channel analog input. This function enables you to enjoy high quality analog sources.

When using this function, only the volume and front speaker level can be adjusted.

Note

You cannot select "A. DIRECT" when you select GAME and USB as input.

Auto Format Direct (A.F.D.) mode

The Auto Format Direct (A.F.D.) mode allows you to listen to high fidelity sound and select the decoding mode for listening to a 2 channel stereo sound as multi channel sound.

■ A.F.D. AUTO (A.F.D. Auto)

Presets the sound as it was recorded/encoded without adding any surround effects.

However, for USA and Canada models, this receiver will generate a low frequency signal for output to the subwoofer when there is no LFE signals.

■ MULTI ST. (Multi Stereo)

Outputs 2 channel left/right signals from all speakers. However, sound may not be output from certain speakers depending on the speaker settings.

Movie mode

You can take advantage of surround sound simply by selecting one of the receiver's pre-programmed sound fields. They bring the exciting and powerful sound of movie theaters into your home.

■ HD-D.C.S.

HD Digital Cinema Sound (HD-D.C.S.) is Sony's new innovative home theater technology using the latest acoustic and digital signal processing technologies. It is based on precise response measurement data of a mastering studio.

With HD-D.C.S., you are able to enjoy Blu-ray and DVD movies at home with not only the high quality of sound, but also the best sound ambience, just as the movie's sound engineer intended in the mastering process. You can select the effect type for HD-D.C.S. For details, see "Surround Settings menu" (page 94).

■ PLII MV (PLII Movie)

Performs Dolby Pro Logic II Movie mode decoding. This setting is ideal for movies encoded in Dolby Surround. In addition, this mode can reproduce sound in 5.1 channel for watching videos of overdubbed or old movies.

■ PLIIx MV (PLIIx Movie)

Performs Dolby Pro Logic IIx Movie mode decoding. This setting expands Dolby Pro Logic II Movie or Dolby Digital 5.1 to discrete 7.1 movie channels.

■ PLIIz (PLIIz Height)

Performs Dolby Pro Logic IIz mode decoding. This setting increases flexibility to expand a 5.1 to a 7.1 channel system. Its vertical equipment gives a dimension of presence and depth.

■ NEO6 CIN (Neo:6 Cinema)

Performs DTS Neo:6 Cinema mode decoding. A source recorded in 2 channel format is decoded into 7 channels.

Music mode

You can take advantage of surround sound simply by selecting one of the receiver's pre-programmed sound fields. They bring the exciting and powerful sound of concert halls into your home.

■ HALL (Hall)

Reproduces the acoustics of a classical concert hall.

■ JAZZ (Jazz Club)

Reproduces the acoustics of a jazz club.

■ CONCERT (Live Concert)

Reproduces the acoustics of a 300-seat live house.

■ STADIUM (Stadium)

Reproduces the feeling of a large open-air stadium.

■ SPORTS (Sports)

Reproduces the feeling of sports broadcasting.

■ P. AUDIO (Portable Audio)

Reproduces a clear enhanced sound image from your portable audio device. This mode is ideal for MP3 and other compressed music.

■ PLII MS (PLII Music)

Perform Dolby Pro Logic II Music mode decoding. This setting is ideal for normal stereo sources such as CDs.

■ PLIIx MS (PLIIx Music)

Performs Dolby Pro Logic IIx Music mode decoding. This setting is ideal for normal stereo sources such as CDs.

■ PLIIz (PLIIz Height)

Performs Dolby Pro Logic IIz mode decoding. This setting increases flexibility to expand a 5.1 to a 7.1 channel system. Its vertical equipment gives a dimension of presence and depth.

■ NEO6 MUS (Neo:6 Music)

Performs DTS Neo:6 Music mode decoding. A source recorded in 2 channel format is decoded into 7 channels. This setting is ideal for normal stereo sources such as CDs.

When headphones are connected

You can only select this sound field if the headphones are connected to the receiver.

■ HP 2CH (HP (2CH))

This mode is selected automatically if you use headphones (except “A. DIRECT”). Standard 2 channel stereo sources completely bypass the sound field processing and multi channel surround formats are downmixed to 2 channels except LFE signals.

■ HP DIRECT (HP (Direct))

This mode is selected automatically if you use headphones when “A. DIRECT” is selected. Outputs the analog signals without processing by the equalizer, sound field, etc.

If you connect a subwoofer

This receiver will generate a low frequency signal for output to the subwoofer when there is no LFE signal, which is a low-pass sound effect output from a subwoofer to a 2 channel signal. However, the low frequency signal is not generated for “NEO6 CIN” or “NEO6 MUS” when all speakers are set to “Large”. In order to take full advantage of the Dolby Digital bass redirection circuitry, we recommend setting the subwoofer’s cut off frequency as high as possible.

Notes on sound fields

- Depending on the speaker pattern settings, some sound fields may not be available.
- You cannot select PLIIx and PLIIz at the same time.
 - PLIIx is available only when the speaker pattern is set to a setting with surround back speaker(s).
 - PLIIz is available only when the speaker pattern is set to a setting with front high speakers.

- The sound fields for music and movie do not work in the following cases.
 - DTS-HD Master Audio, DTS-HD High Resolution Audio or Dolby TrueHD with sampling frequency of more than 48 kHz are being received.
 - “A.DIRECT” is selected.
- “PLII MV”, “PLIIx MV”, “PLII MS”, “PLIIx MS”, “PLIIz”, “NEO6 CIN” and “NEO6 MUS” do not work when the speaker pattern is set to 2/0 or 2/0.1.
- When one of the sound fields for music is selected, no sound is output from the subwoofer if all the speakers are set to “Large” in the Speaker Settings menu. However, the sound will be output from the subwoofer if
 - the digital input signal contains LFE signals.
 - the front or surround speakers are set to “Small”.
 - “MULTI ST.”, “PLII MV”, “PLII MS”, “PLIIx MV”, “PLIIx MS”, “HD-D.C.S.” or “P. AUDIO” is selected.

To turn off the surround effect for movie/music

Press SOUND FIELD +/- repeatedly to select “2CH ST.” or “A.F.D. AUTO”.

You can also press 2CH/A.DIRECT repeatedly on the receiver to select “2CH ST.” or press A.F.D. repeatedly on the receiver to select “A.F.D. AUTO”.

Digital audio formats supported by the receiver


Digital audio formats that this receiver can decode depend on digital audio output jacks of the equipment connected. This receiver supports the following audio formats.

Audio format	Maximum number of channels	Connection between the playback equipment and the receiver	
		COAXIAL/OPTICAL	HDMI
Dolby Digital	5.1	○	○
Dolby Digital EX	6.1	○	○
Dolby Digital Plus ^{a)}	7.1	×	○
Dolby TrueHD ^{a)}	7.1	×	○
DTS	5.1	○	○
DTS-ES	6.1	○	○
DTS 96/24 ^{c)}	5.1	○	○
DTS-HD High Resolution Audio ^{a)}	7.1	×	○
DTS-HD Master Audio ^{a)b)}	7.1	×	○
Multi Channel Linear PCM ^{a)}	7.1	×	○

^{a)} Audio signals are output in another format if the playback equipment does not correspond to the format. For details, refer to the operating instructions of the playback equipment.
^{b)} Signals with a sampling frequency of more than 96 kHz are played back at 96 kHz or 88.2 kHz.
^{c)} The DTS 96/24 will decode as DTS when the A.P.M. (Automatic Phase Matching) function is activated.

Using the SOUND OPTIMIZER

The Sound Optimizer lets you enjoy clear and dynamic sound at low volume levels. It automatically calibrates the sound which cannot be heard well when you turn down the volume level. After Auto Calibration is performed, the sound level is optimized to suit your environment.



Press SOUND OPTIMIZER to select “S. OPT. ON”.


The Sound Optimizer function is activated. The Sound Optimizer is set to on and off as you press SOUND OPTIMIZER.

Note

This function does not work when “A. DIRECT” is being used.

Resetting sound fields to the default settings

Be sure to use the buttons on the receiver to perform this operation.

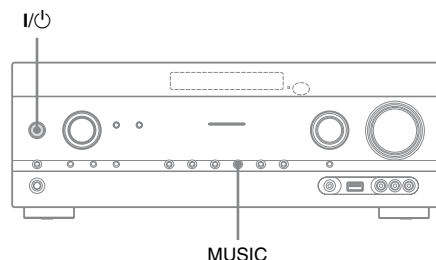

1 Press I/⏻ to turn off the receiver.

2 While holding down MUSIC, press I/⏻.

“S.F. CLEAR” appears on the display panel and all sound fields are reset to their default setting.

About the network functions of the receiver

- You can enjoy audio content which has been stored on a DLNA-compliant device (DLNA CERTIFIED™ Products) that has an authorized DLNA logo displayed on the device (page 73).
- You can use the receiver as a device equivalent to a UPnP media renderer on your home network.
- With an Internet connection, you can listen to music services (page 75) and update the software of the receiver.
- You can listen to the same music at the same time in different rooms through the PARTY STREAMING function.
- You can register Media Remote devices to control the receiver.

About DLNA

DLNA (Digital Living Network Alliance) is a standard organization made up of manufacturers of various products, such as servers (computers, etc.), AV equipment, and mobile computing devices which exchange content (music, photos, and videos). DLNA decides upon standards and publishes an authorized logo to be displayed on devices which support DLNA standards.

Setting up the server

To listen to audio content stored on your server with this receiver, you need to set up the server in advance. The following server devices are compatible with this receiver.

- Sony VAIO Media plus 1.3, 1.4, 2.0, and 2.1
- Sony HDD Network Audio System NAS-S500HDE*, NAS-S55HDE*
- Sony Network AV receiver STR-DA6400ES*, TA-DA5600ES*
- Microsoft Windows Media Player 12 installed on Windows 7 (page 70)
- Microsoft Windows Media Player 11 installed on Windows Vista/Windows XP (page 71)

* Not available in some countries or regions.

If the server has a function that limits access from other devices, you must change the setting on the server to allow the receiver to access it.

This section explains how to set up Windows Media Player when using it as a server. For details on the settings of other server devices, refer to the operating instructions or help of the respective devices or applications.

Note


The items displayed on the computer may be different from the ones shown below, depending on the version of the operating system or the computer environment. For details, refer to Help for your operating system.

When using Windows 7

This section explains how to set up manufacturer-installed Windows Media Player 12 for Windows 7.

For details on how to operate Windows Media Player 12, refer to Help for Windows Media Player 12.

1 Go to [Start] – [Control Panel].



2 Select [View network status and tasks] under [Network and Internet].


The [Network and Sharing Center] window appears.

Tip

If the item you want does not appear on the display, try to change the display type of the Control Panel.

3 Select [Public network] under [View your active networks]. If the display shows other than [Public Network], go to step 6.

The [Set Network Location] window appears.




4 Select [Home network] or [Work network] according to the environment in which the receiver is used.


5 Follow the instructions that appear on the display according to the environment in which the receiver is used.

When the settings are completed, confirm that the item under [View your active networks] is changed to [Home network] or [Work network] in the [Network and Sharing Center] window.

6 Select [Change advanced sharing settings].




7 Select [Choose media streaming options...] from [Media streaming].



8 If [Media streaming is not turned on] appears in the [Media streaming options] window, select [Turn on media streaming].

9 Select [Allow all].

The [Allow All Media Devices] window opens. If all the devices in the local network are set to [Allowed], select [OK] and close the window.



10 Select [Allow all computers and media devices].

11 Select [OK] to close the window.

12 Refresh the server list.

After you finish setting up Windows Media Player 12, refresh the server list of the receiver and select this server from the server list. For details on selecting a server, see “To refresh the server list” (page 72).

When using Windows Vista/XP

This section explains how to set up Windows Media Player 11 installed on Windows Vista/XP*.

For details on how to operate Windows Media Player 11, refer to Help for Windows Media Player 11.

* Windows Media Player 11 is not manufacturer-installed on Windows XP. Access the Microsoft website, download the installer, and then install Windows Media Player 11 on your computer.

1 Go to [Start] – [All Programs].




2 Select [Windows Media Player].

Windows Media Player 11 starts up.

3 Select [Media Sharing...] from the [Library] menu.


If you are using Windows XP, go to step 9.

4 When  is displayed, select [Networking...].




The [Network and Sharing Center] window appears.

5 Select [Customize].



The [Set Network Location] window appears.

6 Check [Private] and select [Next].




7 Confirm that [Location type] is changed to [Private], and select [Close].

8 Confirm that [(Private network)] is displayed in the [Network and Sharing Center] window, and close the window.

9 If [Share my media] in the [Media Sharing] window that is displayed in step 3 is not checked, check [Share my media], then select [OK].

A list of connectable devices is displayed.



10 Select [Settings...] that appears beside [Share my media to:].

11 Check [Allow new devices and computers automatically] and select [OK].

Note

Uncheck this item after you confirm that the receiver can be connected to the server and play audio content stored on the server.

12 Refresh the server list.

After you finish setting up Windows Media Player 11, refresh the server list of the receiver and select this server from the server list. For details on selecting a server, see “To refresh the server list” (page 72).

To refresh the server list

When you add a new server to the home network, or when you cannot find the server you want on the list, refresh the server list.

1 While the server list is displayed, press TOOLS/OPTIONS.

2 Select “Refresh”, then press ⊕.

The refreshed server list appears.

Tip

The receiver keeps a history of the last five connected servers and these servers appear at the top of the server list. Up to 20 servers can be displayed in a server list.

To delete a server from the server list

1 While the server list is displayed, select the server you want to delete, then press TOOLS/OPTIONS.

The options menu appears.

2 Select “Delete”, then press ⊕.

The confirmation display appears on the TV screen.

3 Select “OK”, then press ⊕.

“Complete!” appears, and the selected server is deleted.



Note

Even if you delete the server from the server list, the server will appear in the list again if the receiver finds it on the network (such as when you refresh the server list).

Enjoying audio content stored on the server

You can play back audio content stored on the server using the receiver in MP3, Linear PCM, WMA and AAC* formats. Audio content with DRM (Digital Rights Management) copyright protection cannot be played on this receiver.

* The receiver can play AAC files with the extension of “.m4a”, “.mp4” or “.3gp” only.

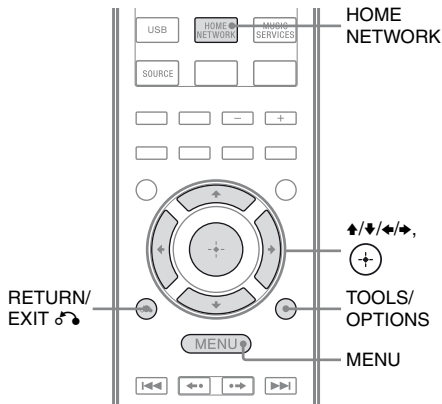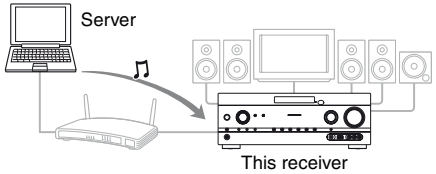

1 Press MENU.

The menu is displayed on the TV screen.

2 Select “🎵 Music”, then press or .

3 Select “HOME NETWORK”, then press .

The server list appears on the TV screen. If the last selected item (playlist, album, folder, etc.) appears on the TV screen, press RETURN/EXIT repeatedly until the server list appears.

When “No Server” appears, or when the server on the list is not available, press TOOLS/OPTIONS. Select “Refresh”, then press . The refreshed server list appears.

Tip

You can also use HOME NETWORK button on the remote control to select the Home Network function directly.

4 Select the server which holds the content you want to play back.

The content list appears on the TV screen.

Note

If the server device supports the Wake-on-LAN standard, the receiver turns the server on automatically. If the server does not support the Wake-on-LAN standard, turn on the server in advance. For details on settings or operations of Wake-on-LAN of your server, refer to the operating instructions or help of your server.

5 Select the item (playlist, album, folder, etc.) you want, then press .

If another item appears, repeat step 5 to narrow down the choices until the item you want appears. The items that are displayed depend on the connected server.

6 Select the track you want, then press .

Playback starts.

Make sure that sound is being output from the speakers of the receiver.

Tips

- If you select a folder (such as an artist folder, genre folder, etc.), then press the ► button, the receiver plays all items in the selected folder.
- The receiver resumes from the last selected item when the function is changed to Home Network function, until the receiver is turned off. When “Network Standby” is set to “On”, play resumes from the last selected item, even if you turned off the receiver.

Notes

- Tracks that the receiver cannot play appear on the TV screen as well. You cannot sort a list of playable tracks.
- “!” appears at the top of a track name that cannot be played on the receiver, and is skipped during playback.
- Play is not resumed from the last selected item if you unplug the power cord from the wall outlet.
- The receiver may take time to display items when browsing a folder that contains a large amount of audio content. In this case, use the Keyword Search (page 80).

To check the copyright protection

This receiver cannot play back files in WMA format with DRM copyright protection.

If a WMA file cannot be played back on this receiver, check the property of that file on your computer to see whether the file is DRM-copyrighted.

Open the folder or volume where the WMA file is stored and right-click the file to display the [Properties] window. If there is a [License] tab, the file is DRM-copyrighted and cannot be played back on this receiver.

To operate Home Network function using the remote control

To	Do the following
Pause playback*	Press II during playback. Press ► to resume playback.
Stop playback	Press ■ .
Go to beginning of the current track, previous/next track	Press ◀◀/▶▶ repeatedly.
Reselect the item you want to play	Press RETURN/EXIT ↵ repeatedly until the directory you want appears. Or press TOOLS/OPTIONS, select “Server List”, then select the item you want. To return to the playback display, press TOOLS/OPTIONS and select “Now Playing”.
Search the item you want using a keyword	While selecting the contents in the server, press SHIFT, then press ALPHABET SEARCH, and then enter a keyword (page 80).
Change the server	While playback is stopped, press TOOLS/OPTIONS. Select “Server List”, then press + . Select the server you want, then press + .
Select Repeat Play	Press SHIFT, then press REPEAT repeatedly until ↺ or ↻ 1 appears on the TV screen.
Select Shuffle Play	Press SHIFT, then press SHUFFLE repeatedly until “SHUF” appears on the TV screen.


* Depending on the server or track, pause playback may not work when the Home Network function is selected.

Listening to music services

You can listen to music services offered on the Internet with this receiver (Music Service function).


To use this function, the receiver must be connected to the network and the network must be connected to the Internet. For details, see “6: Connecting to the network” (page 33). Visit the website below for more information on the Music Services:

<http://www.sony.net/audio/musicservices>

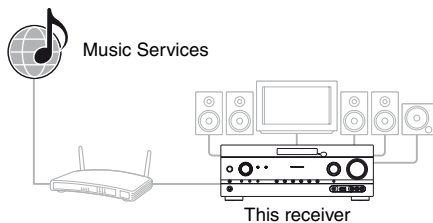

Note

Before using music services, you may have to register your receiver depending on the service provider. For details on registration, visit the customer support site of the service provider.

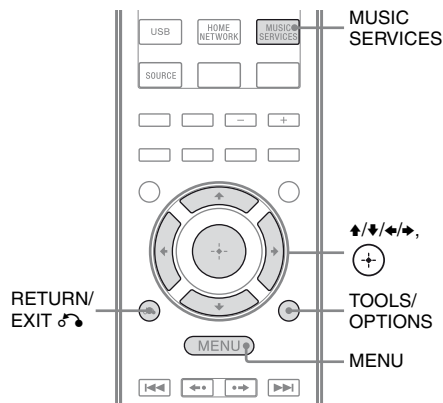

The following steps explain how to select “vTuner” as an example of music services offered on the Internet.

1 Press MENU.

The menu is displayed on the TV screen.

2 Select “ Music”, then press or .

3 Select “MUSIC SERVICES”, then press .

The service provider list appears on the TV screen. If the receiver automatically displays the last selected service or station, press RETURN/EXIT repeatedly until the service provider list appears.

Tip

You can also use MUSIC SERVICES button on the remote control to select the Music Services function directly.

4 Select “vTuner”, then press .

5 Select the folder or station you want, then press .

- Press to select the item.
- Press to go to the next directory, or to listen to the station.
- Press RETURN/EXIT to go to the previous directory.

Tip

The receiver displays the last selected service or station when the function is changed to Music Service function, until the receiver is turned off. When “Network Standby” is set to “On”, the last selected service or station is displayed even if you turned off the receiver.

Note

If “No Service” appears and you cannot obtain a service provider list, press TOOLS/OPTIONS and select “Refresh”.

To operate Music Services function using the remote control

To	Do the following
Change the station or service	Press RETURN/EXIT  to return to the service provider list, then select the service again. To return to the playback display again, press TOOLS/OPTIONS and select "Now Playing".
Use various functions while the receiver is selecting or playing a station or service	Press TOOLS/OPTIONS. The item displayed may vary according to the selected item or directory.
Select the service options	While selecting or playing the contents in the service, press TOOLS/OPTIONS. Select "Service Options", then press  . The contents of the service option vary depending on the selected services.
Search the item you want using a keyword	While selecting the contents in the server, press SHIFT, then press ALPHABET SEARCH, and then enter a keyword (page 80).
View the available information	Press DISPLAY repeatedly to view the artist name, album name, the clock, etc.

Presetting stations

You can store up to 20 stations as your favorite stations.

- 1 Select the station you want to preset.**
- 2 During reception, press SHIFT, then press ENT/MEM.**
The preset memory list appears.
- 3 Select a preset number, then press .**
- 4 Repeat steps 1 to 3 to store another station.**

To listen to the preset station

- 1** Select "🎵 Music" from the menu, then press  or .
- 2** Select "MUSIC SERVICES", then press .
The service provider list appears on the TV screen. If the receiver automatically displays the last selected station, press RETURN/EXIT  repeatedly until the service provider list appears.
- 3** Select "Preset", then press .
"Preset" appears at the top of the service provider list.
- 4** Select the preset station you want, then press .

Tip

Use the numeric buttons to select the preset station. Press the numeric button that corresponds to the preset number, then press  to select the preset station directly.

Note

There may be some stations that cannot be preset, depending on the service providers. If you try to preset such a station, "Not Available" appears on the display.

Enjoying a variety of music services

You can enjoy listening to the content of a variety of music services offered on the Internet.

Visit the website below for more information on music services, how to enjoy services, and the registration code of the receiver.

<http://www.sony.net/audio/musicservices>

Checking the registration code

You may be required to enter the registration code of the receiver when you enjoy a new music service.

- 1** Select "🎵 Music" from the menu, then press  or .

- 2 Select "MUSIC SERVICES", then press **+**.
The service provider list appears on the TV screen. If the receiver automatically displays the last selected service or station, press RETURN/EXIT **↵** repeatedly until the service provider list appears.



- 3 Select "Registration Code", then press **+**.
The registration code of the receiver appears.

Using the PARTY STREAMING function

Audio contents currently being played back on this receiver can be also played back on all devices corresponding to the PARTY STREAMING function on your home network at the same time.

While PARTY streaming, a device called a "PARTY host" starts a PARTY and streams music, and a device called a "PARTY guest" joins a PARTY and receives music from the "PARTY host".

Before using the PARTY STREAMING function, make sure that "PARTY STREAMING" is set to "On" (page 100).

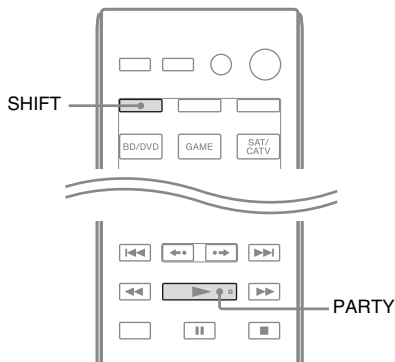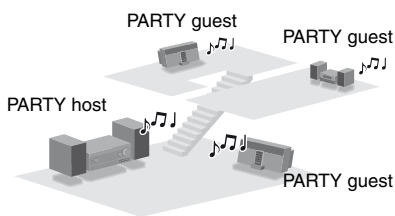

You can enjoy the PARTY STREAMING function with other devices* that have this PARTY STREAMING logo shown below.



* Available PARTY STREAMING-compliant devices may differ depending on the countries or regions. For details on available devices, contact your nearest Sony dealers.

Starting a PARTY

You can start a PARTY so that other devices that support the PARTY STREAMING function can play the same music even though they are in different rooms.

- 1 **Make sure the PARTY guest devices are turned on and ready to join a PARTY.**
- 2 **Play the sound source you want.**

Audio content of all the sound sources on this receiver can be streamed.

Notes

- Only audio contents on this receiver can be streamed. During PARTY host, video signals are not output to the TV, and audio from the receiver will downmix to 2 channel.

- When you start a PARTY as PARTY host, you may face a time gap between the audio output and visual display in the following cases.
 - The Audio Return Channel (ARC) function is used.
 - The video output of the equipment is connected to the TV and the audio output is connected to the digital or analog audio input jacks on the receiver.
- Sources with copyright protection may not be streamed.

3 Press SHIFT, then hold down PARTY until “START PARTY” appears.

The receiver starts PARTY streaming as a PARTY host.

To close a PARTY

Press SHIFT, then hold down PARTY until “CLOSE PARTY” appears.

Joining a PARTY

The receiver can join a PARTY that has been started by another device so that you can enjoy the same audio content being played in a different room.

While the PARTY host device is having a PARTY, press SHIFT, then press PARTY.

“JOIN PARTY” appears, and the receiver joins the PARTY as a PARTY guest.

To leave a PARTY

Press SHIFT, then press PARTY. “LEAVE PARTY” appears, and the receiver leaves a PARTY.

Tip

If “Network Standby” is set to “On”, the receiver turns on and joins the PARTY automatically when the PARTY host device starts the PARTY.

Notes

- You cannot join a PARTY in the following cases:
 - you have a PARTY on this receiver.
 - you have already joined another PARTY.
- If you press PARTY when no PARTY is started, but a device complying with PARTY STREAMING function is playing, the device will be the PARTY host, and the receiver will join the PARTY as a PARTY guest.
- The PARTY guest device function automatically switches to HOME NETWORK when the device joins a PARTY. Even if the PARTY guest device leaves the PARTY, the function remains as HOME NETWORK.

Updating the software

By downloading the latest version of the software, you can take advantage of the newest functions. The receiver accesses the Sony server to update the software.

If a new update is available, “[New Software] Perform Software Update.” appears on the TV screen when you are connected to the Internet and using the Home Network or Music Services function.

Make sure that other equipment connected to the receiver is stopped before updating the software.

For details on software update available, refer to the customer support site (page 124).

Notes

- Make sure not to turn off the receiver, disconnect the network cable or perform any operation on the receiver while the updating operation is in progress.
- If you try to update the software when the Sleep Timer is on, the Sleep Timer will turn off automatically.

1 Press HOME NETWORK to select the Home Network function.

2 Press MENU.

The menu is displayed on the TV screen.

3 Select “ Settings”, then press  or .

The Settings menu list appears on the TV screen.

4 Select “Network”, then press .

5 Select “Software Update”, then press .

6 Select “Update”, then press .

The receiver starts checking the available software update.

7 When “Found latest update.” appears, press .

If the update is not available, “No update required.” appears.

8 Select “OK”, then press .

A message that confirms whether or not you agree to the terms of the software update appears. Confirm the message and also read the “END-USER LICENSE AGREEMENT FOR SONY SOFTWARE” (page 130), then press .

9 Select “Agree”, then press .

The receiver starts to update the software. It may take a while (about 20 minutes at the longest) for the receiver to finish the update. The required time will depend on the amount of data in the updates, the line type of the network, the network communication environment, etc. “Complete!” appears after the software update is finished.

Press  to turn off the receiver, and the receiver is updated to the new version.

To cancel the procedure

Select “Cancel” in step 8.

To go back to the previous screen

Press RETURN/EXIT  before the receiver starts the software update.

You cannot go back to the previous screen when the update starts.

Network features message list

Network settings

Message and explanation

Connection Fail

The receiver has failed to connect the network.

Input Error!

The entered values are incorrect or invalid.

Not in Use

An operation that is currently prohibited is being performed.

Home Network

Message and explanation

Cannot Connect

The receiver cannot be connected to the selected server.

Cannot Get Info

The receiver cannot retrieve information on the server or contents.

Cannot JOIN

The receiver has failed to join a PARTY.

Cannot Play

The receiver cannot play audio files due to an unsupported file format or playback restrictions.

Cannot START

The receiver has failed to start a PARTY.

Data Error

You tried to play an unplayable file.

Device Full!

You cannot register any more devices to the device list.

Initialize

The receiver is performing a factory default setting to Network function.

No Server

There is no server on the network that the receiver can connect to. Try refreshing the server list (page 72).

Message and explanation

No Track

There is no playable file in the selected folder on the server.

Not Found

There is no item on the server that matches a keyword.

Not in Use

An operation that is currently prohibited is being performed.

Music Services

Message and explanation

Cannot Connect

The receiver cannot be connected to the server.

Cannot Get Data

The receiver cannot obtain content from the server.

Cannot Play

The receiver cannot play a service or station due to an unsupported file format or playback restrictions.

Data Error

- You tried to play an unplayable file.
- The receiver does not recognize the data on the server.

Need Software update

The service is not available in the current version of the receiver software.

Visit the website below for more information on the software update:

<http://www.sony.net/audio/musicservices>

No Preset

There is no station stored on the receiver for the selected preset number.

No Service

There is no service provider.

No Station

There is no station in the selected service.

Not Available

- The selected service is not available.
- An operation that is currently unavailable is being performed.

Not in Use

An operation that is currently prohibited is being performed.

Software update

Message and explanation

Cannot connect

The receiver cannot access to the server to download the latest version of the software. Enter the settings menu and update the software again (page 78).

Can't download

The receiver failed downloading the update data while performing the software update. Enter the settings menu and update the software again (page 78).


Update Error

The receiver cannot update the software. Turn off the receiver, and then turn it on again. The receiver will try to update the software. If the same message appears, contact your nearest Sony dealer.

Searching for an item using a keyword

When a list is displayed on the TV screen (such as artist list, a track list, etc.), you can enter a keyword to search for an item you want.

Searching by keywords is available only when the Home Network or Music Service function is selected.

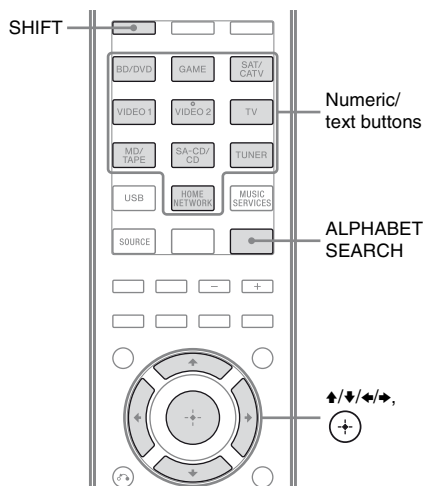

- 1 Press SHIFT, then press ALPHABET SEARCH while an item list (artist list, track list, etc.) is displayed on the TV screen.**

The keyword input display appears on the TV screen.

- 2 Press SHIFT, then press the numeric/text buttons to enter a keyword.**

A keyword can be up to 15 characters.

Note

Enter a keyword that will match the letters or a word at the beginning of the name or title of the item you want to search for. When the receiver searches for an item, "The" at the beginning of a name and the following space will be ignored.

- 3 Press .**

An item that matches the keyword appears. If the item appears is not the one you are searching for, press / to display the previous/next item.

- 4 Repeat steps 1 to 3 until you find the item you want, then press .**

- 5 Select the track you want, then press .**

Playback starts.

"BRAVIA" Sync Features

What is "BRAVIA" Sync?

The "BRAVIA" Sync function allows communication between Sony products such as TV, Blu-ray Disc/DVD player, AV amplifier, etc. that supports the Control for HDMI function.

By connecting Sony equipment that is compatible with the "BRAVIA" Sync with an HDMI cable (not supplied), operation is simplified as follows:

- One-Touch Play (page 83)
- System Audio Control (page 83)
- System Power-Off (page 84)
- Theater/Theatre Mode Sync (page 84)
- Scene Select (page 84)

Control for HDMI is a mutual control function standard used by HDMI CEC (Consumer Electronics Control) for HDMI (High-Definition Multimedia Interface).

We recommend that you connect the receiver to products featuring "BRAVIA" Sync.

Note

Depending on the connected equipment, the Control for HDMI function may not work. Refer to the operating instructions of the equipment.

Preparing for the “BRAVIA” Sync

The receiver is compatible with the “Control for HDMI-Easy Setting” function.

- If your TV is compatible with the “Control for HDMI-Easy Setting” function, you can set the Control for HDMI function of the receiver and playback equipment automatically by setting the Control for HDMI function on your TV (page 82).
- If your TV is not compatible with the “Control for HDMI-Easy Setting” function, set the Control for HDMI function of the receiver, playback equipment and TV individually (page 82).


If your TV is compatible with the “Control for HDMI-Easy Setting” function

The Control for HDMI function of the receiver can be turned on simultaneously by turning on the Control for HDMI function of the TV.

- 1** Connect the receiver, TV and playback equipment via HDMI connection (page 23, 24).
(The respective equipment must be compatible with the Control for HDMI function.)
- 2** Turn on the receiver, TV and playback equipment.
- 3** Turn on the Control for HDMI function of the TV.
The Control for HDMI function of the receiver and all the connected equipment are turned on simultaneously. When the setup is completed, “COMPLETE” will appear on the display panel.

For details on setup of the TV, refer to the operating instructions of your TV.

If your TV is not compatible with the “Control for HDMI-Easy Setting” function



- 1** Press MENU.
The menu is displayed on the TV screen.
- 2** Select “Settings” from the menu, then press (+) or ➡.
The Settings menu list appears on the TV screen.
- 3** Select “HDMI”, then press (+) or ➡.
- 4** Select “Ctrl for HDMI”, then press (+) or ➡.
- 5** Select “ON”, then press (+).
The Control for HDMI function is set to on.
- 6** Press GUI MODE to exit the GUI menu.
If the GUI menu is displayed, the Control for HDMI function of the playback equipment will not work properly.
- 7** Set the Control for HDMI function of the connected equipment to on.
If the Control for HDMI function is already set to on, you do not need to change the setting.
For details on setting the TV and connected equipment, refer to the operating instructions of the respective equipment.

Notes


- Before you perform the “Control for HDMI-Easy Setting” on your TV, be sure to turn on the TV and other connected equipment including the receiver first.
- If the playback equipment cannot function after you have made the settings for “Control for HDMI-Easy Setting”, check the Control for HDMI setting on your TV.
- If the connected equipment does not support the “Control for HDMI-Easy Setting”, but still supports the Control for HDMI, then you need to set the Control for HDMI function for the connected equipment before you perform the “Control for HDMI-Easy Setting” from the TV.
- If you have assigned the HDMI input to another input using “HDMI Assign” in HDMI menu, the One-Touch Play function is not available.

Playing back equipment with one-touch operation (One-Touch Play)

By a simple operation (one-touch), equipment connected to the receiver with Bravia Sync function start automatically. You can enjoy the sound/image using connected equipment. When you set “Pass Through” to “AUTO” or “ON”, sound and image can be output only from the TV while the receiver remains in standby mode.

When you start playback a connected equipment, the receiver and TV operation are simplified as follow:

Receiver and TV



Notes

- Be sure that the System Audio Control function is set to on using TV menu.
- Depending on the TV, the start of the content may not appear.
- Depending on the settings, the receiver may not turn on when “Pass Through” is set to “AUTO” or “ON”.


Tip

You can also select a connected equipment, such as Blu-ray Disc/DVD player from the TV menu. The receiver and TV will automatically switch to the appropriate HDMI input.

Enjoying the TV sound from the speakers connected to the receiver (System Audio Control)

You can enjoy the TV sound from the speakers connected to the receiver by a simple operation.

You can operate System Audio Control function using the TV menu. For details, refer to the operating instructions of the TV.

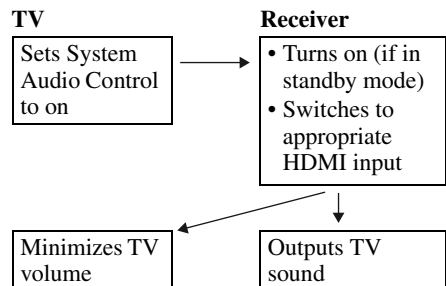

You can also use the System Audio Control function as follows.

- If you turn on the receiver while the TV is turned on, the System Audio Control function will automatically activate to output TV sound through the speakers connected to the receiver. However, if you turn off the receiver, the sound will output from the TV speakers.

- When you adjust the TV volume, the System Audio Control function adjusts the receiver's volume simultaneously.

Notes


- If System Audio Control does not function according to your TV setting, refer to the operating instructions of the TV.
- When "Ctrl for HDMI" is set to "ON", the "Audio Out" settings in the HDMI Settings menu will set automatically based on the System Audio Control settings.
- If the TV is turned on before turning on the receiver, the TV will momentarily lose the sound output.

Turning off the receiver with the TV

(System Power-Off)

When you turn the TV off, using the POWER button on the TV's remote control, the receiver and the connected equipment turn off automatically.

You can also use the receiver's remote control to turn off the TV.



Press TV, then press AV I/O.

The TV, receiver and the equipment connected via HDMI are turned off.

Notes

- Set the TV power supply interlock function to "ON" before using the System Power-Off function. For details, refer to the operating instructions of the TV.
- Depending on the connected equipment, it may not be turned off. For details, refer to the operating instructions of the connected equipment.

Enjoying movies with the optimum sound field

(Theater/Theatre Mode Sync)

Press THEATER or THEATRE on the remote control of the TV or the Blu-ray Disc player, while pointing the remote control towards the TV.

The sound field switches to "HD-D.C.S.".

To return to the previous sound field, press THEATER or THEATRE again.

Note

The sound field may not switch depending on the TV.

Tip

The sound field may revert to the previous field when you change the TV's input.

Enjoying optimum sound field for the selected scene

(Scene Select)

The Scene Select function allows you to enjoy the optimum picture quality and switches the sound field according to the selected scene on your TV.

For details on the operation, refer to the operating instructions of the TV.


Note

The sound field may not switch depending on the TV.

Using Auto Volume function

You can adjust the volume automatically depending on the input signal or content from the connected equipment (ADVANCED AUTO VOLUME function).

This function is useful, for example, when the sound of a commercial is louder than the TV programs.

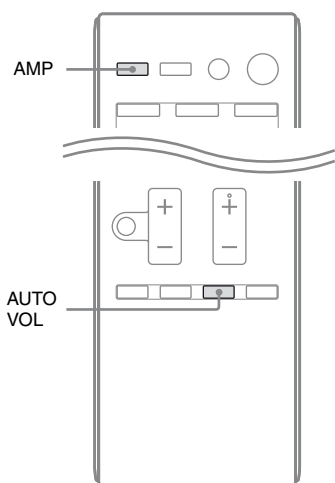

Press AMP, then press AUTO VOL.

The auto volume function is set to on and off as you press AUTO VOL.

Notes

- Be sure to reduce the volume level before you turn off this function.
- As this function is available only when Dolby Digital, DTS or Linear PCM signals are input, the sound may suddenly increase when you switch to other formats.
- This function does not work in the following cases.
 - Linear PCM signals with a sampling frequency of more than 48 kHz are being received.
 - Dolby Digital Plus, Dolby TrueHD, DTS 96/24, DTS-HD Master Audio, or DTS-HD High Resolution Audio signals are being received.

Switching between digital and analog audio (INPUT MODE)

When you connect equipment to both digital and analog audio input jacks on the receiver, you can fix the audio input mode to either of them, or switch from one to the other, depending on the type of material you intend to watch.

1 Turn INPUT SELECTOR on the receiver to select the input.

You can also use the input buttons on the remote control.

2 Press INPUT MODE repeatedly on the receiver to select the audio input mode.

The selected audio input mode appears on the display panel.

- **AUTO:** Gives priority to digital audio signals. If there are more than one digital connection, HDMI audio signals have priority.

If there are no digital audio signals, analog audio signals are selected. When TV input is selected, priority is given to the Audio Return Channel (ARC) signals. If your TV is not compatible with the Audio Return Channel (ARC) function, the digital optical audio signals are selected.

- **COAX:** Specifies the digital audio signals input to the DIGITAL COAXIAL jack.
- **OPT:** Specifies the digital audio signals input to the DIGITAL OPTICAL jack.
- **ANALOG:** Specifies the analog audio signals input to the AUDIO IN (L/R) jacks.

Notes

- Some audio input modes may not be set up based on the input.
- When either the USB input, HOME NETWORK, MUSIC SERVICES or SIRIUS is selected, “-----” appears on the display panel, and you cannot change to other modes.
- When “A. DIRECT” is being used, audio input is set to “ANALOG”. You cannot select other modes.
- The Audio Return Channel (ARC) function does not work in the following cases.
 - Your TV is not compatible with the Audio Return Channel (ARC) function.
 - “Ctrl for HDMI” is set to “OFF”.
 - When you do not connect the receiver to the ARC compatible TV’s HDMI jack via an HDMI cable.

Using the sound/images from other inputs (Input Assign)

You can reassign audio and/or video signals to another input when they are not currently being used.

After you have reassigned the input jacks, you can use the input button (or INPUT SELECTOR on the receiver) to select the equipment you connected.

Component video and digital audio input assign

You can reassign the COMPONENT VIDEO and DIGITAL input jacks to other input if the default settings of the jacks do not correspond to your connected equipment.

Example:

When you connect the DVD player to the OPTICAL SAT/CATV IN and COMPONENT VIDEO SAT/CATV (IN 2) jacks.

- Assign the OPTICAL SAT/CATV IN jack to “BD/DVD”.
- Assign the COMPONENT VIDEO SAT/CATV (IN 2) jacks to “BD/DVD”.

- 1 Press MENU.**
The menu is displayed on the TV screen.
- 2 Select “ Input”, then press  or .**
- 3 Select the input name you want to assign.**
- 4 Press TOOLS/OPTIONS.**
The options menu appears.
- 5 Select “Input Assign”, then press  or .**
The “Input Assign” screen appears.
- 6 Select the audio and/or video signals you want to assign to the input which you selected in step 3 using , , , or .**
- 7 Press .**

Input name		BD/DVD	GAME	SAT/ CATV	VIDEO 1	VIDEO 2	MD/TAPE	SA-CD/ CD
Assignable video input jacks	COMP.1	○*	○	○	○	○	○	○
	COMP.2	○	○	○*	○	○	○	○
	CVBS	○	—	○	○*	○*	—	—
	NONE	—	○*	—	—	—	○*	○*
Assignable audio input jacks	BD COAX	○*	○	○	○	○	○	○
	SAT OPT	○	○	○*	○	○	○	○
	ANALOG	○	—	○	○*	○*	○*	○*
	NONE	—	○*	—	—	—	—	—

* Default setting

Notes

- You cannot assign other optical input to the inputs to which optical input jack is initially assigned.
- When you assign the digital audio input, the INPUT MODE setting may change automatically.
- One reassignment is allowed for each input.

HDMI input assign

You can reassign the HDMI input jacks to other input if the default settings of the jacks do not correspond to your connected equipment.

Example:

When you connect the CD player to the HDMI SAT/CATV (IN 3) jack, assign “HDMI 3” jack to “SA-CD/CD”.

Note

Before you reassign the HDMI input jacks, be sure to set “Ctrl for HDMI” to “OFF”.

1 Press MENU.

The menu is displayed on the TV screen.

2 Select “Settings”, then press or .

The Settings menu list appears on the TV screen.

3 Select “HDMI”, then press or .

4 Select “HDMI Assign”, then press or .

5 Select the HDMI jack you want to assign, then press or .

6 Select the input name you want to assign, then press .

Input name		BD/DVD	GAME	SAT/ CATV	VIDEO 1	VIDEO 2	MD/ TAPE	SA-CD/ CD	NONE
Assignable HDMI input jacks	HDMI 1	○*	○	○	○	○	○	○	○
	HDMI 2	○	○*	○	○	○	○	○	○
	HDMI 3	○	○	○*	○	○	○	○	○
	HDMI 4	○	○	○	○*	○	○	○	○

* Default setting

Using a bi-amplifier connection

1 Press MENU.

The menu is displayed on the TV screen.

2 Select “ Settings”, then press or .

The Settings menu list appears on the TV screen.

3 Select “Speaker”, then press or .

4 Select “SP Pattern”, then press or .

5 Select the appropriate speaker pattern so that there are no surround back speakers and front high speakers, then press .

6 Select “SB Assign”, then press or .

7 Select “BI-AMP”, then press .

The same signals output from the SPEAKERS FRONT A terminals can be output from the SPEAKERS SURROUND BACK/FRONT HIGH/BI-AMP/FRONT B terminals.

To exit the menu

Press MENU.

Notes

- Set the “SB Assign” to “BI-AMP” before you perform Auto Calibration.
- If you set the “SB Assign” to “BI-AMP”, the speaker level and distance settings of the surround back speakers and front high speakers become invalid, and those of the front speakers are used.

Using multi-zone features

You can enjoy images and sounds from the equipment connected to the receiver in zone 2 other than the main zone. For example, you can watch the DVD in the main zone and listen to the CD in zone 2.

When using an IR repeater (not supplied), you can operate both equipment in the main zone and Sony receiver in zone 2 from zone 2.


To operate the receiver from zone 2

You can operate the receiver without pointing the remote control towards the receiver if you connect an IR repeater (not supplied) to the IR REMOTE jack.

Use an IR repeater when you install the receiver in a place where signals from the remote control cannot reach.

Making a zone 2 connection


Outputs sound from speakers in zone 2 using the receiver and another amplifier.

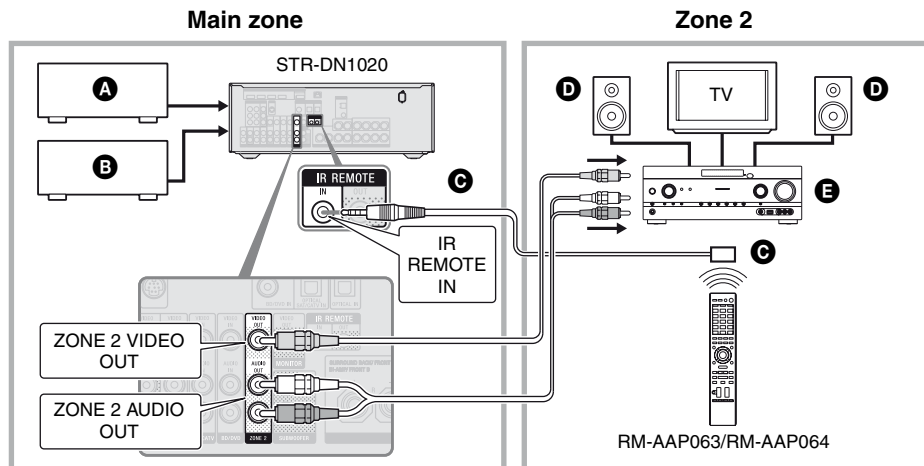

- A** Audio equipment
- B** Video equipment
- C** IR repeater (not supplied)
- D** Speakers
- E** Sony Amplifier/Receiver

Operating the receiver from zone 2

The following operations are described for connecting an IR repeater and operating the receiver in zone 2. When an IR repeater is not connected, use this receiver in the main zone.

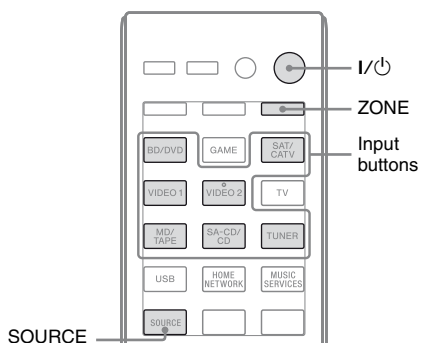

1 Turn on the main receiver (this receiver).

2 Turn on the receiver in zone 2.

3 Press ZONE.

The remote control switches to zone 2.

4 Press I/⏻.

The zone function is activated.

5 Press the input buttons to select the source you want.

For zone 2, analog video and audio signals are output.

When you select SOURCE, the signals of the current input in main zone are output.

6 Adjust to a suitable volume using the receiver in zone 2.

To exit the zone 2 operation

Press ZONE, then press I/⏻.


Tips

- Even when this receiver is in standby mode (press I/⏻ on the remote control to turned off this receiver), the receiver in zone 2 remains turned on. To turn off all receivers, press I/⏻ and AV I/⏻ on the remote control at the same time (SYSTEM STANDBY).
- Only signals from equipment connected to the analog input jacks are output through the ZONE 2 OUT jacks. No signals are output from equipment connected to only the digital input jacks.
- The TV, GAME, USB, HOME NETWORK and MUSIC SERVICES inputs can be selected in main zone only.
- When SOURCE is selected, the signals input to the HDMI IN jacks, DIGITAL IN jacks and USB port are not output from the ZONE 2 OUT jacks.
- When SOURCE is selected, the audio signals from Home Network and Music Services are not output from the ZONE 2 OUT jacks.
- You can select either “FM” or “AM” from the main zone and zone 2. Priority is given to the choice which has most recently been selected, even if a different choice has already been selected in one of the zones.
- You can select only the same channel from “SIRIUS” when listening in both the main zone and zone 2 simultaneously. Priority is given to the channel which has most recently been selected, even if a different channel has already been selected in either zone.

Adjusting Settings

Using the Settings menu

You can adjust various settings for speakers, surround effects, etc. using the Settings menu. To display the menu of the receiver on the TV screen, make sure that the receiver is in “GUI MODE” by following the steps in “To turn “GUI MODE” on and off” (page 45).

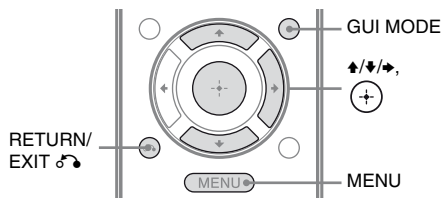


1 Press MENU.

The menu is displayed on the TV screen.




2 Select “Settings” from the menu, then press or to enter the menu mode.

The Settings menu list appears on the TV screen.



3 Select the menu item you want, then press .

Example: When you select “Auto Cal.”.



4 Select the parameter you want, then press .

To return to the previous screen

Press RETURN/EXIT .

To exit the menu

Press MENU.

Settings menu list

Settings menu	Description
Auto Cal.	Sets the speaker level or distance and makes the measurement automatically (page 38).
Speaker	Sets the speaker position manually (page 92).
Surround	Selects the sound field and adjusts the surround effect you choose (page 94).
EQ	Adjusts the equalizer (bass/treble sound) (page 95).
Audio	Sets various sound items (page 95).
Video	Adjust the resolution of analog video signals (page 97).
HDMI	Makes settings for sound/images from equipment connected to the HDMI jacks (page 98).
Network	Makes settings for the network (page 99).
System	Makes settings for the system of the receiver (page 102).

Speaker Settings menu

You can adjust each speaker manually.
You can also adjust the speaker levels after the Auto Calibration is completed.

Note

The speaker settings are only for the current seating position.

■ SP Pattern (Speaker Pattern)

Select “SP Pattern” according to the speaker system which you are using. Select the speaker pattern before you perform Auto Calibration.

■ SB Assign (Surround back speaker assign)

Lets you set the SPEAKERS SURROUND BACK/FRONT HIGH/BI-AMP/FRONT B terminals for a bi-amplifier or speakers front B connection.

- **Speaker B**
- **BI-AMP**
- **OFF**

Note

When you change the connection from a bi-amplifier or speakers front B to surround back or front high speakers connection, set the “SB Assign” to “OFF”, then set up the speakers again. See “Using AUTO CALIBRATION” (page 38) or “Manual Setup” (page 92).

■ Manual Setup

You can adjust each speaker manually on the “Manual Setup” screen. You can also adjust the speaker levels after the Auto Calibration is completed.

To adjust the speaker level

You can adjust each speaker’s level (front left/right, front left/right high, center, surround left/right, surround back left/right, subwoofer).

- 1 Select the speaker on the screen for which you want to adjust the level, then press (+).

- 2 Select “Lvl”.

- 3 Set the level of the selected speaker, then press (+).

You can adjust the level from –10.0 dB to +10.0 dB in 0.5 dB intervals.

Note

When one of the sound fields for music is selected, no sound is output from the subwoofer if all the speakers are set to “Large”. However, the sound will be output from the subwoofer if

- the digital input signal contains LFE signals.
- the front or surround speakers are set to “Small”.
- “MULTI ST.”, “PLII MV”, “PLII MS”, “PLIIX MV”, “PLIIX MS”, “HD-D.C.S.” or “P. AUDIO” is selected.

To adjust the distance from the seating position to each speaker

You can adjust the distance from the seating position to each speaker (front left/right, front left/right high, center, surround left/right, surround back left/right, subwoofer).

- 1 Select the speaker on the screen for which you want to adjust the distance from the seating position, then press (+).

- 2 Select “Dist”.

- 3 Set the distance of the selected speaker, then press (+).

You can adjust the distance from 1 m 0 cm to 10 m 0 cm (3 feet 3 inches to 32 feet 9 inches) in 10 cm (1 inch) intervals.

Tip

You can adjust the distance in 1 cm interval when you have performed the Auto Calibration and saved the measurement result.

Notes

- Depending on the speaker pattern setting, some parameters may not be available.
- This function does not work when “A. DIRECT” is being used.

To adjust the size of each speaker

You can adjust each speaker's (front left/right, front left/right high, center, surround left/right, surround back left/right) size.

- 1 Select the speaker on the screen for which you want to adjust the size, then press **(+)**.
- 2 Select "Size".
- 3 Set the size of the selected speaker, then press **(+)**.
 - **Large:** If you connect large speakers that will effectively reproduce bass frequencies, select "Large". Normally, select "Large".
 - **Small:** If the sound is distorted, or you feel a lack of surround effects when using multi channel surround sound, select "Small" to activate the bass redirection circuitry and output the bass frequencies of each channel from the subwoofer or other "Large" speakers.

Note

This function does not work when "A. DIRECT" is being used.

Tips

- The "Large" and "Small" settings for each speaker determine whether the internal sound processor will cut the bass signal from that channel. When the bass is cut from a channel, the bass redirection circuitry sends the corresponding bass frequencies to the subwoofer or other "Large" speakers. However, since bass sound has a certain amount of directionality, it is best not to cut it, if possible. Therefore, even when using small speakers, you can set them to "Large" if you want to output the bass frequencies from that speaker. On the other hand, if you are using a large speaker, but prefer not to have bass frequencies output from that speaker, set it to "Small". If the overall sound level is lower than you prefer, set all speakers to "Large". If there is not enough bass, you can use the equalizer to boost the bass levels.

- The surround back speakers will be set to the same setting as that of the surround speakers.
- When the front speakers are set to "Small", the center, surround, and front high speakers are also automatically set to "Small".
- If you do not use the subwoofer, the front speakers are automatically set to "Large".

■ Crossover Freq (Speaker crossover frequency)

Lets you set the bass crossover frequency of speakers that the speaker size has been set to "Small" in the Speaker Settings menu.

Measured speaker crossover frequency is set for each speaker after the Auto Calibration.

- 1 Select the speaker on the screen you want to adjust, then press **(+)**.
- 2 Adjust the value, then press **(+)**.

■ Test Tone

You can select the test tone type on the "Test Tone" screen.

Tips

- To adjust the level of all speakers at the same time, press MASTER VOL +/- or **▲** +/- . You can also use MASTER VOLUME on the receiver.
- The adjusted value is shown on the TV screen during adjustment.

To output test tone from each speaker

You can output test tone from the speakers in sequence.

- 1 Select "Test Tone", then press **(+)** or **➤**.
- 2 Adjust the parameter, then press **(+)**.
 - **OFF**
 - **AUTO:** The test tone is output from each speaker in sequence.
 - **FL, CNT, FR, SR, SB*, SBR, SBL, SL, LH, RH, SW:** You can select which speakers will output the test tone.
 - * "SB" appears when only one surround back speaker is connected.
- 3 Adjust the speaker level, then press **(+)**.

continued

When a test tone is not output from the speakers

- The speaker cords may not be connected securely. Check to see if they are connected securely and cannot be disconnected by pulling on them slightly.
- The speaker cords may have short-circuit problem.
- Make sure that you are not using PARTY STREAMING function (page 77).

When a test tone is output from a different speaker than the speaker displayed on the TV screen

The speaker pattern set up is incorrect. Make sure that the speaker connections and the speaker pattern match correctly.

■ D.Range Comp (Dynamic range compression)

Lets you compress the dynamic range of the soundtrack. This may be useful when you want to watch movies at low volumes late at night. Dynamic range compression is possible with Dolby Digital sources only.

- **MAX:** The dynamic range is compressed dramatically.
- **STD:** The dynamic range is compressed as intended by the recording engineer.
- **AUTO:** The dynamic range is compressed automatically.
- **OFF:** The dynamic range is not compressed.

Tips

- Dynamic range compressor lets you compress the dynamic range of the soundtrack based on the dynamic range information included in the Dolby Digital signal.
- “STD” is the standard setting, and enacts light compression. Therefore, we recommend using the “MAX” setting. This greatly compresses the dynamic range and lets you view movies late at night at low volumes. Unlike analog limiters, the levels are predetermined and provide a very natural compression.

■ Distance Unit

Lets you select the unit of measurement for setting distances.

- **FEET:** The distance is displayed in feet.
- **METER:** The distance is displayed in meters.

Surround Settings menu

You can select the sound field and adjust the effect level, etc. on the “Sound Field Setup” screen.

For details on the sound field, see “Enjoying Surround Sound” (page 64).

Note

The setup items you can adjust on each menu vary depending on the sound field.

To adjust the effect level for HD-D.C.S.


- 1 Select “HD-D.C.S.”, then press **⊕** or **➔**.
- 2 Select the effect type you want, then press **⊕**.
HD-D.C.S. has three different types: Theater, Dynamic and Studio. Each type has different reflection and reverberation sound mixture levels and is optimized to match a listener’s room uniqueness, taste and mood.
 - **Dynamic:** Want to enjoy the sound effects to the full extent, just like at the movie theaters?
Dynamic type emphasizes on the reflection sound. Without HD-D.C.S., many rooms are often somewhat reverberant but lack a spacious feeling. This type acoustically opens up those types of rooms and provides a spacious and dynamism feeling equivalent to a mastering studio.

- **Theater:** Theater type (default setting) mixes reflection and reverberation sound creating the characteristics of a mastering studio. Additionally, this type mixes in frequency characteristics that are often found in professional studios and movie theaters. It is ideal for watching movies in a listening room that has less reverberation.
- **Studio:** In Studio type, effects are kept to a minimum, while still providing a great theater experience. This type provides the accuracy of the original recording.

EQ Settings menu

You can use the following parameters to adjust the tonal quality (bass/treble level) of front speakers.

- **Bass**
- **Treble**

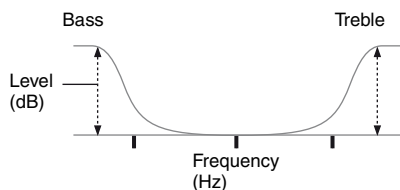

Note

This function does not work when “A. DIRECT” is being used.

Audio Settings menu

You can adjust settings for the audio to suit your preference.

■ D.L.L. (Digital Legato Linear)

The D.L.L. function is Sony proprietary technology that allows low quality digital audio signals and analog audio signals to be played back with high quality sound.

- **AUTO 1:** This function is available for lossy compression audio formats and analog audio signals.
- **AUTO 2:** This function is available for Linear PCM signals, as well as lossy compression audio formats and analog audio signals.
- **OFF**

Note

This function works when “2CH ST.”, “A.F.D. AUTO”, “MULTI ST.” or “HP 2CH” is selected. However, this function does not work in the following cases.

- Linear PCM signals with a sampling frequency of other than 44.1 kHz are being received.
- Dolby Digital Plus, Dolby Digital EX, Dolby TrueHD, DTS 96/24, DTS-HD Master Audio, or DTS-HD High Resolution Audio signals are being received.

■ A/V Sync (Synchronizes audio with video output)

Lets you delay the output of audio to minimize the time gap between audio output and visual display.

- **HDMI AUTO:** The time gap between audio output and visual display for the monitor connected via an HDMI connection will be adjusted automatically based on the information for the TV. This feature is available only when the monitor supports the A/V Sync function.
- **0 ms – 300 ms:** You can adjust the delay from 0 ms to 300 ms in 10 ms intervals.

Notes

- This function is useful when you use a large LCD or plasma monitor or a projector.
- This function does not work when "A. DIRECT" is being used.

■ Dual Mono (Digital broadcast language selection)

Lets you select the language you want when you listen to the dual audio of a digital broadcast when available. This feature only functions for Dolby Digital sources.

- **MAIN/SUB:** Sound of the main language will be output through the front left speaker and sound of the sub language will be output through the front right speaker simultaneously.
- **MAIN:** Sound of the main language will be output.
- **SUB:** Sound of the sub language will be output.

Video Settings menu

You can make settings for video.

■ Resolution (Converting video signals)

Lets you convert the resolution of analog video input signals.

“Resolution” parameter	Output from	HDMI TV OUT jack	COMPONENT VIDEO MONITOR OUT jacks	MONITOR VIDEO OUT jack
	Input from			
• DIRECT	COMPONENT VIDEO IN jacks	● ^{a)}	○	—
	VIDEO IN jacks	● ^{a)}	—	○
• AUTO(CVBS) (default setting)	COMPONENT VIDEO IN jacks	● ^{a)}	● ^{b)}	● ^{b)}
	VIDEO IN jacks		● ^{b)}	● ^{b)}
• 480/576i	COMPONENT VIDEO IN jacks	● ^{c)}	●	●
	VIDEO IN jacks	● ^{c)}	●	●
• 480/576p	COMPONENT VIDEO IN jacks	●	●	—
	VIDEO IN jacks	●	●	○
• 720p • 1080i	COMPONENT VIDEO IN jacks	●	● ^{d)}	—
	VIDEO IN jacks	●	● ^{d)}	○
• 1080p	COMPONENT VIDEO IN jacks	●	○	—
	VIDEO IN jacks	●	—	○

- : Video signals are converted and output through the video converter.
○ : The same type of signal as that of the input signal is output. Video signals are not converted.
— : Video signals are not output.

- ^{a)} The resolution is set automatically, depending on the connected monitor.
^{b)} When the TV is connected to jacks other than the HDMI jacks, 480i/576i signals are output.
^{c)} 480p/576p signals are output even if 480i/576i is set.
^{d)} Video signals without copyright protection are output based on the settings menu. Video signals with copyright protection are output as 480p/576p.

Notes

- Video signals are not output from the COMPONENT VIDEO MONITOR OUT or MONITOR VIDEO OUT jacks when the monitor, etc., is connected to HDMI TV OUT jack.
- If you select a resolution that the connected TV does not support in the “Resolution” parameter, the images from the TV cannot be output correctly.
- Converted HDMI image output does not support x.v.Color (x.v.Colour), Deep Color (Deep Colour) and 3D image.

HDMI Settings menu

You can make the required settings for equipment connected to the HDMI jack.

■ Ctrl for HDMI (Control for HDMI)

Lets you turn the Control for HDMI function on or off. For details, see “Preparing for the “BRAVIA” Sync” (page 82).

- **ON**
- **OFF**

Note

When you set “Ctrl for HDMI” to “ON”, “Audio Out” may be changed automatically.

■ Pass Through

Lets you output the HDMI signals to the TV even when the receiver is in standby mode.

- **ON:** When the receiver is in the standby mode, the receiver continuously outputs HDMI signals from the receiver’s HDMI TV OUT jack.
- **AUTO:** When the TV is turned on while the receiver is in the standby mode, the receiver outputs HDMI signals from the receiver’s HDMI TV OUT jack. Sony recommends this setting if you use a “BRAVIA” Sync compatible Sony TV. This setting saves power in the standby mode when compared with the “ON” setting.
- **OFF:** The receiver does not output HDMI signals when the receiver is in the standby mode. Turn on the receiver to enjoy the connected equipment’s source on the TV. This setting saves power in the standby mode when compared with the “ON” setting.

Notes

- This function is not available when “Ctrl for HDMI” is set to “OFF”.
- When “AUTO” is selected, it may take a little more time for the image and sound to be output to the TV than when “ON” is selected.
- When the receiver is in standby mode, “A. STANDBY” appears on the display panel if “Pass Through” is set to “AUTO” or “ON”. However, “A. STANDBY” will disappear when “Pass Through” is set to “AUTO” and no signals are detected.

■ Audio Out

Lets you set the HDMI audio signals from the playback equipment connected to the receiver via an HDMI connection.

- **AMP:** The HDMI audio signals from the playback equipment are only output to the speakers connected to the receiver. Multi channel sound can be played back as it is.

Note

Audio signals are not output from the TV’s speaker when “Audio Out” is set to “AMP”.

- **TV+AMP:** The sound is output from TV’s speaker and the speakers connected to the receiver.

Notes

- The sound quality of the playback equipment depends on the TV’s sound quality, such as the number of channels, and the sampling frequency, etc. If the TV has stereo speakers, the sound output from the receiver is also in stereo as that of the TV, even if you play back multi channel source.
- When you connect the receiver to an image display equipment (projector, etc.), sound may not be output from the receiver. In this case, select “AMP”.
- When you select the input that you have assigned the HDMI input, sound does not output from the TV.

■ HDMI Assign

Lets you reassign the HDMI input jacks. For details, see “HDMI input assign” (page 87).

Network Settings menu

You can make the settings for the network. The Network Settings menu is available only when the Home Network or Music Services function is selected.

■ Settings

Lets you make the network settings.

To configure network settings automatically

You can configure network settings automatically. For details, see “Configuring the network settings of the receiver” (page 43).

To set the IP address manually

- 1 Select “Settings”, then press $\oplus$.
- 2 Select “Manual”, then press $\oplus$.
The IP address input display appears on the TV screen.
- 3 Press SHIFT, then press numeric button to enter the value for “IP Address”.
- 4 Press $\oplus$.
- 5 Repeat steps 3 to 4 to enter the value for “Subnet Mask”, “Default Gateway”, “Primary DNS” and “Secondary DNS”.
The proxy settings display appears on the TV screen.
- 6 Select “Do Not Use”, then press $\oplus$.
The confirmation display appears on the TV screen.
- 7 Select “OK”, then press $\oplus$.

To set the Proxy server manually

- 1 Select “Use” in step 6 in “To set the IP address manually” (page 99) or step 7 in “Configuring the network settings of the receiver” (page 43), then press $\oplus$.
The proxy address input display appears on the TV screen.
- 2 Press SHIFT, then press numeric/text button to enter the value for “Proxy Address”.
- 3 Press $\oplus$.
- 4 Repeat steps 2 to 3 to enter the value for “Port Number”.
The confirmation display appears on the TV screen.
- 5 Select “OK”, then press $\oplus$.

■ Information

You can check the network information for the network.

To check the network information

- 1 Select “Information”, then press $\oplus$.
- 2 Select the setting item you want to check, then press $\oplus$.
The current setting information appears on the TV screen.
You can check the settings* for “Connection”, “IP Settings”, “IP Address”, “Subnet Mask”, “Default Gateway”, “DNS Settings”, “Primary DNS”, “Secondary DNS”, “Proxy Settings”, “Proxy Address”, “Port Number” and “MAC Address”.

* The setting items during setup differ depending on the network environment.

■ PARTY STREAMING

You can set the receiver to use the PARTY STREAMING function.

- 1 Select "PARTY STREAMING", then press (+).
- 2 Select "On" or "Off", then press (+).
 - **On:** The receiver can be detected by other devices on the home network. The receiver can start or close a PARTY, and can join or leave a PARTY.
 - **Off:** The receiver can be detected by other devices on the home network. However, the receiver cannot start or close a PARTY, and cannot join or leave a PARTY.

■ Access Settings

You can set access restriction or permission for the devices on the device list.

To set the auto access permission

- 1 Select "Access Settings", then press (+).
- 2 Select "Auto Access", then press (+).
- 3 Select "Allow" or "Not Allow", then press (+).
 - **Allow:** All the devices on the home network are permitted to access this receiver. This receiver can start a PARTY as host device and join a PARTY as a guest device if requested.
 - **Not Allow:** The receiver restricts a new device that is accessing the receiver. When connecting a new device to the home network, add the device to the device list, and set access permission (page 100).

Note

Up to 20 devices can be added to the device list. If 20 devices have already been registered, "Device Full" appears, and a new device cannot be added to the list. In this case, delete unnecessary devices from the list (page 100).

To add devices to the device list

- 1 Select "Access Settings", then press (+).
- 2 Select "Control Device", then press (+). The device list appears on the TV screen.
- 3 Select "Add Device", then press (+).
- 4 Select the device you want, then press (+). The selected device is added to the device list. For details on setting the access permission, see "To set access permission for the devices" (page 100).

To set access permission for the devices

You can set access permission for a device on the device list. Only devices set to "Allow" are recognized on the home network.

- 1 Select "Access Settings", then press (+).
- 2 Select "Control Device", then press (+). The registered device list appears on the TV screen.
- 3 Select the device you want, then press (+).
- 4 Select "Access", then press (+).
- 5 Select "Allow" or "Not Allow", then press (+).

To delete a device from the list

Select "Delete" in step 4, then press (+). Select "OK" on the confirmation display, then press (+).

■ Media Remote Device Registration

Lets you register your Media Remote devices.

To register the Media Remote devices

- 1 Select "Media Remote Device Registration", then press (+).

2 Select “Start Registration”, then press



The receiver starts to detect Media Remote device that ready for registration.

However, the receiver will exit the registration if no device detected in 30 seconds.

“Connecting” appears on the TV screen when Media Remote device is detected.

3 Select “Finish”, then press



To cancel the registration

Select “Cancel” in step 2, then press



Note

Up to 5 Media Remote devices can be added to the device list. If 5 devices have already been registered, “Device Full” appears, and a new device cannot be added to the list. In this case, delete unnecessary devices from the list (page 100).

■ Registered Media Remote Devices

Lets you check the list of the registered Media Remote devices. Only registered devices are allow to control the receiver.

To delete registered Media Remote devices from the device list

1 Select “Registered Media Remote Devices”, then press



The registered media remote device lists appear on the TV screen.

2 Select the device you want to delete, then press



3 Select “Delete”, then press



4 Select “OK”, then press



The selected device is deleted from the device list.

■ Device Name

Lets you assign a device name to the receiver up to 30 characters to be easily recognizable by other devices on the home network.

To assign the device name

1 Select “Device Name”, then press



2 Press



to select the current device name.

3 Press SHIFT, then press numeric/text button to enter the device name.

4 Press



Tip

The default device name is “STR-DN1020”.

■ Network Standby

While the “Network Standby” mode is set to “On”, the receiver can always be connected and controlled over the network.

1 Select “Network Standby”, then press



2 Select “Off” or “On”, then press



- **Off:** The network function turns off when the receiver is in standby mode. The receiver takes more time to resumes operation when powered on again.
- **On:** The network function works even when the receiver is in standby mode, and resume operations when controlled over the network.

Note

When the receiver is in standby mode, “A. STANDBY” appears on the display if “Network Standby” is set to “On”.

■ Software Update

You can update the software of the receiver to the latest version.

For details, see “Updating the software” (page 78).

To check the software version

1 Select “Software Update”, then press



2 Select “Version”, then press



The software version appears on the TV screen.

System Settings menu

You can customize the settings of the receiver.

■ Auto Standby

Lets you set the receiver switch to standby mode automatically when you do not operate the receiver or when there is no signals input to the receiver.


- **ON:** Switches to standby mode after approximately 30 minutes.
- **OFF:** Does not switch to standby mode.

Notes

- This function does not work in the following cases.
 - “FM TUNER”, “AM TUNER”, “SIRIUS”, “HOME NETWORK” or “MUSIC SERVICES” input is selected.
 - PARTY STREAMING function is being used.
 - The software of the receiver is being updated.
- If you use the Auto standby mode and the Sleep Timer at the same time, the Sleep Timer has priority.

Operating without connecting to a TV

You can operate this receiver using the display panel even if the TV is not connected to the receiver.

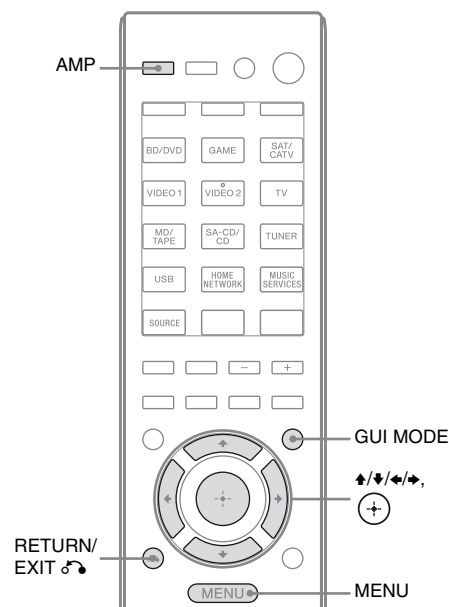

Using the menu in the display panel

Press GUI MODE repeatedly to select “GUI OFF”.

The receiver is switched to front panel display mode.

- 1** Press AMP.
- 2** Press MENU.
- 3** Press $\uparrow/\downarrow$ repeatedly to select the menu you want, then press $\odot$ or $\rightarrow$.
- 4** Press $\uparrow/\downarrow$ repeatedly to select the parameter you want to adjust, then press $\odot$ or $\rightarrow$.
- 5** Press $\uparrow/\downarrow$ repeatedly to select the setting you want, then press $\odot$.

To return to the previous display

Press $\leftarrow$ or RETURN/EXIT $\hookrightarrow$.

To exit the menu

Press MENU.

Note

Some parameters and settings may appear dimmed on the display panel. This means that they are either unavailable or fixed and unchangeable.

Overview of the menus

The following options are available in each menu. For details on navigating through menus, see page 103.

Menu [Display]	Parameters [Display]	Settings	Default setting
Auto Calibration settings [<AUTO CAL>]	Auto Calibration (Standard) [STANDARD]		ENGINEER
	Auto Calibration (Custom) [CUSTOM]	FULL FLAT, ENGINEER, FRONT REF, OFF	FULL FLAT
Level settings [<LEVEL>]	Test tone ^{b)} [TEST TONE]	OFF, FIX ■■■■ ^{c)} , AUTO ■■■■ ^{c)}	OFF
	Front left speaker level ^{b)} [FL LEVEL]	FL -10.0 dB to FL +10.0 dB (0.5 dB interval)	FL 0 dB
	Front right speaker level ^{b)} [FR LEVEL]	FR -10.0 dB to FR +10.0 dB (0.5 dB interval)	FR 0 dB
	Center speaker level ^{b)} [CNT LEVEL]	CNT -10.0 dB to CNT +10.0 dB (0.5 dB interval)	CNT 0 dB
	Surround left speaker level ^{b)} [SL LEVEL]	SL -10.0 dB to SL +10.0 dB (0.5 dB interval)	SL 0 dB
	Surround right speaker level ^{b)} [SR LEVEL]	SR -10.0 dB to SR +10.0 dB (0.5 dB interval)	SR 0 dB
	Surround back speaker level ^{b)} [SB LEVEL]	SB -10.0 dB to SB +10.0 dB (0.5 dB interval)	SB 0 dB
	Surround back left speaker level ^{b)} [SBL LEVEL]	SBL -10.0 dB to SBL +10.0 dB (0.5 dB interval)	SBL 0 dB
	Surround back right speaker level ^{b)} [SBR LEVEL]	SBR -10.0 dB to SBR +10.0 dB (0.5 dB interval)	SBR 0 dB
	Front left high speaker level ^{b)} [LH LEVEL]	LH -10.0 dB to LH +10.0 dB (0.5 dB interval)	LH 0 dB
	Front right high speaker level ^{b)} [RH LEVEL]	RH -10.0 dB to RH +10.0 dB (0.5 dB interval)	RH 0 dB
	Subwoofer level ^{b)} [SW LEVEL]	SW -10.0 dB to SW +10.0 dB (0.5 dB interval)	SW 0 dB
	Dynamic range compression [D. RANGE]	COMP. MAX, COMP. STD, COMP. AUTO, COMP. OFF	COMP. AUTO
Speaker settings [<SPEAKER>]	Speaker pattern [SP PATTERN]	5/2.1 to 2/0 (20 patterns)	3/4.1
	Front speakers size ^{b)} [FRT SIZE]	LARGE, SMALL	LARGE
	Center speaker size ^{b)} [CNT SIZE]	LARGE, SMALL	LARGE

Menu [Display]	Parameters [Display]	Settings	Default setting
	Surround speakers size ^{b)} [SUR SIZE]	LARGE, SMALL	LARGE
	Front high speakers size ^{b)} [FH SIZE]	LARGE, SMALL	LARGE
	Surround back speaker assign ^{d)} [SB ASSIGN]	SPK B, BI-AMP, OFF	OFF
	Front left speaker distance ^{b)} [FL DIST.]	FL 1.00 m to FL 10.00 m (FL 3'3" to FL 32'9") (0.1 m (1 inch) interval) ^{e)}	FL 3.00 m (FL 9'10")
	Front right speaker distance ^{b)} [FR DIST.]	FR 1.00 m to FR 10.00 m (FR 3'3" to FR 32'9") (0.1 m (1 inch) interval) ^{e)}	FR 3.00 m (FR 9'10")
	Center speaker distance ^{b)} [CNT DIST.]	CNT 1.00 m to CNT 10.00 m (CNT 3'3" to CNT 32'9") (0.1 m (1 inch) interval) ^{e)}	CNT 3.00 m (CNT 9'10")
	Surround left speaker distance ^{b)} [SL DIST.]	SL 1.00 m to SL 10.00 m (SL 3'3" to SL 32'9") (0.1 m (1 inch) interval) ^{e)}	SL 3.00 m (SL 9'10")
	Surround right speaker distance ^{b)} [SR DIST.]	SR 1.00 m to SR 10.00 m (SR 3'3" to SR 32'9") (0.1 m (1 inch) interval) ^{e)}	SR 3.00 m (SR 9'10")
	Surround back speaker distance ^{b)} [SB DIST.]	SB 1.00 m to SB 10.00 m (SB 3'3" to SB 32'9") (0.1 m (1 inch) interval) ^{e)}	SB 3.00 m (SB 9'10")
	Surround back left speaker distance ^{b)} [SBL DIST.]	SBL 1.00 m to SBL 10.00 m (SBL 3'3" to SBL 32'9") (0.1 m (1 inch) interval) ^{e)}	SBL 3.00 m (SBL 9'10")
	Surround back right speaker distance ^{b)} [SBR DIST.]	SBR 1.00 m to SBR 10.00 m (SBR 3'3" to SBR 32'9") (0.1 m (1 inch) interval) ^{e)}	SBR 3.00 m (SBR 9'10")
	Front left high speaker distance ^{b)} [LH DIST.]	LH 1.00 m to LH 10.00 m (LH 3'3" to LH 32'9") (0.1 m (1 inch) interval) ^{e)}	LH 3.00 m (LH 9'10")
	Front right high speaker distance ^{b)} [RH DIST.]	RH 1.00 m to RH 10.00 m (RH 3'3" to RH 32'9") (0.1 m (1 inch) interval) ^{e)}	RH 3.00 m (RH 9'10")
	Subwoofer distance ^{b)} [SW DIST.]	SW 1.00 m to SW 10.00 m (SW 3'3" to SW 32'9") (0.1 m (1 inch) interval) ^{e)}	SW 3.00 m (SW 9'10")
	Distance unit [DIST. UNIT]	FEET, METER	METER ^{f)}
	Front speakers crossover frequency ^{g)} [FRT CROSS]	CROSS 40 Hz to CROSS 200 Hz (10 Hz interval)	CROSS 120 Hz
	Center speaker crossover frequency ^{g)} [CNT CROSS]	CROSS 40 Hz to CROSS 200 Hz (10 Hz interval)	CROSS 120 Hz

continued

Menu [Display]	Parameters [Display]	Settings	Default setting
	Surround speakers crossover frequency ^{g)} [SUR CROSS]	CROSS 40 Hz to CROSS 200 Hz (10 Hz interval)	CROSS 120 Hz
	Front high speakers crossover frequency ^{g)} [FH CROSS]	CROSS 40 Hz to CROSS 200 Hz (10 Hz interval)	CROSS 120 Hz
Surround settings [<SURROUND>]	Effect level ^{h)} [EFFECT]	DYNAMIC, THEATER, STUDIO	THEATER
EQ settings [<EQ>]	Front speakers bass level [BASS]	BASS –10 dB to BASS +10 dB (1 dB interval)	BASS 0 dB
	Front speakers treble level [TREBLE]	TREBLE –10 dB to TREBLE +10 dB (1 dB interval)	TREBLE 0 dB
Tuner settings [<TUNER>]	FM station receiving mode [FM MODE]	STEREO, MONO	STEREO
	Naming preset stations [NAME IN]	For details, see “Naming preset stations (Name Input)” (page 57).	
	Sirius parental lock ⁱ⁾ [PARENTAL]	LOCK ON, LOCK OFF	LOCK OFF
	Sirius lock code edit ^{j)} [CODE EDIT]	For details, see “Restricting access to specific channels (Parental Lock)” (page 61).	0000
	Sirius antenna aiming ⁱ⁾ [SR ANT AIM]	For details, see “Checking receiving conditions (Antenna Aiming)” (page 59).	
	Sirius radio ID ^{j)} [SIRIUS ID]	For details, see “Checking the ID number” (page 59).	
Audio settings [<AUDIO>]	Digital Legato Linear [D.L.L.]	D.L.L. OFF, D.L.L. AUTO1, D.L.L. AUTO2	D.L.L. AUTO1
	Synchronizes audio with video output [A/V SYNC]	HDMI AUTO, 0 ms to 300 ms (10 ms interval)	0 ms
	Digital broadcast language selection [DUAL MONO]	MAIN/SUB, MAIN, SUB	MAIN
	Digital audio input assignment [A. ASSIGN]	For details, see “Using the sound/ images from other inputs (Input Assign)” (page 86).	
Video settings [<VIDEO>]	Resolution [RESOLUTION]	DIRECT, AUTO, 480/576i, 480/576p, 720p, 1080i, 1080p	AUTO
	Video input assignment [V. ASSIGN]	For details, see “Using the sound/ images from other inputs (Input Assign)” (page 86).	

Menu [Display]	Parameters [Display]	Settings	Default setting
HDMI settings [<HDMI>]	Control for HDMI [CTRL: HDMI]	CTRL ON, CTRL OFF	CTRL ON
	Pass Through [PASS THRU]	ON, AUTO, OFF	OFF
	Audio out [AUDIO OUT]	AMP, TV+AMP	AMP
	HDMI input assignment [H. ASSIGN]	For details, see “HDMI input assign” (page 87).	
System settings [<SYSTEM>]	Auto standby mode [AUTO STBY]	STBY ON, STBY OFF	STBY ON
	Naming inputs [NAME IN]	For details, see “Naming the input (Name Input)” (page 48).	

- a) You can only select this parameter after you have performed Auto Calibration.
- b) Depends on the speaker pattern setting, some parameters or settings may not be available.
- c) ■■■ represent a speaker channel (FL, FR, CNT, SL, SR, SB, SBL, SBR, LH, RH, SW).
- d) You can only select this parameter if “SP PATTERN” is not set to a setting with surround back or front high speakers (page 37).
- e) You can only adjust the distance in 0.01 meter interval when you have performed the Auto Calibration and saved the measurement result.
- f) “FEET” for USA and Canada models.
- g) You can only select this parameter if your speaker is set to “SMALL”.
- h) You can only select this parameter if you select “HD-D.C.S.” as sound field.
- i) This parameter is available for the USA and Canada models only. You can only select this parameter if the SiriusConnect Home tuner is connected to the SIRIUS jack on the receiver.

To view the information on the display panel

The display panel provides various information of the receiver status such as sound field.

- 1 Select the input for which you want to check the information.
- 2 Press AMP, then press DISPLAY repeatedly.
Each time you press DISPLAY, the display will change cyclically as follows.

Index name of the input* → Input you selected → Sound field currently applied → Volume level → Stream information**

When listening to FM and AM radio

Preset station name* → Frequency → Sound field currently applied → Volume level

When tuning in a channel from SIRIUS

(USA and Canada models only)

Channel name → Channel number → Category name → Artist name/Feature → Song/program title → Composer name → Signal strength → Sound field currently applied → Volume level

When receiving RDS broadcasts (Europe and Australia models only)

Program Service name or preset station name* → Frequency, band and preset number → Sound field currently applied → Volume level

* Index name appears only when you have assigned one to the input or preset station.

Index name does not appear when only blank spaces have been entered or it is same as the input name.

**Stream information may not be displayed.

Tip

You cannot switch the display while “GUI MODE” is shown on the display panel. Press GUI MODE repeatedly to select “GUI OFF”.

Note


Character or marks may not be displayed for some languages.

Programming the remote control

You can customize the remote control to match the equipment connected to your receiver. You can even program the remote control to operate non-Sony equipment and also Sony equipment that the remote control is normally unable to control.

Before you begin, note that:

- You cannot change the settings of TUNER, USB, HOME NETWORK and MUSIC SERVICES input buttons.
- The remote control can only control equipment that accept infrared wireless control signals.

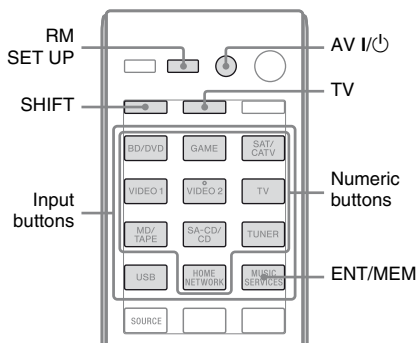

1 Press and hold RM SET UP, then press AV I/⏻.

The RM SET UP indicator flashes slowly.

2 Press the input button of the equipment you want to program.

For example, if you are going to program a VCR connected to VIDEO 1 jacks, press VIDEO 1.

The RM SET UP and SHIFT indicator light up.

3 Press the numeric buttons to enter the numeric code.

If more than one code exists, try to enter either one which corresponds to the equipment including TV.

Use the tables on page 110–113 to find the numeric code(s) corresponding to the equipment.

Note

Only the codes in the 500's are valid for the TV button.

4 Press ENT/MEM.

Once the numeric code has been verified, the RM SET UP indicator slowly flashes twice and the remote control automatically exits the programming mode.

5 Repeat steps 1 to 4 to program other equipment.

Note

The RM SET UP indicator turns off while a numeric button is pressed.

To cancel programming

Press RM SET UP during any step. The remote control automatically exits the programming mode.

To activate the input after programming

Press the programmed button to activate the input you want.

If programming is unsuccessful, check the following:

- If the RM SET UP indicator does not light up in step 1, the batteries are weak. Replace both batteries.
- If the RM SET UP indicator flashes 5 times in quick succession while entering the numeric code, an error has occurred. Start again from step 1.

The numeric codes corresponding to the equipment and the maker of the equipment

Use the numeric codes in the tables below to program non-Sony equipment and also Sony equipment that the remote control is normally unable to control. Since the signal from the remote control received by the equipment differs by its model and the year, more than one numeric code may be assigned to the equipment. If you fail to program your remote control using one of the codes, try using other codes.

Notes

- The numeric codes are based on the latest information available for each brand. There is a chance, however, that your equipment will not respond to some or all of the codes.
- All of the input buttons on this remote control may not be available when used with your particular equipment.

To control a CD player

Maker	Code(s)
SONY	101, 102, 103
DENON	104, 123
JVC	105, 106, 107
KENWOOD	108, 109, 110
MAGNAVOX	111, 116
MARANTZ	116
ONKYO	112, 113, 114
PANASONIC	115
PHILIPS	116
PIONEER	117
TECHNICS	115, 118, 119
YAMAHA	120, 121, 122

To control a DAT deck

Maker	Code(s)
SONY	203
PIONEER	219

To control a tape deck

Maker	Code(s)
SONY	201, 202
DENON	204, 205
KENWOOD	206, 207, 208, 209
NAKAMICHI	210
PANASONIC	216
PHILIPS	211, 212
PIONEER	213, 214
TECHNICS	215, 216
YAMAHA	217, 218

To control an MD deck

Maker	Code(s)
SONY	301
DENON	302
JVC	303
KENWOOD	304

To control an HDD recorder

Maker	Code(s)
SONY	307, 308, 309

To control a Blu-ray Disc player/recorder

Maker	Code(s)
SONY	310, 311, 312
PANASONIC	335
SAMSUNG	336
LG	337

To control a PSX

Maker	Code(s)
SONY	313, 314, 315

To control a DVD player

Maker	Code(s)
SONY	401, 402, 403
BROKSONIC	424
DENON	405
HITACHI	416
JVC	415, 423
MITSUBISHI	419
ORITRON	417
PANASONIC	406, 408, 425
PHILIPS	407
PIONEER	409, 410
RCA	414
SAMSUNG	416, 422
TOSHIBA	404, 421
ZENITH	418, 420

To control a DVD recorder

Maker	Code(s)
SONY	401, 402, 403

To control a DVD/VCR COMBO

Maker	Code(s)
SONY	411

To control a DVD/HDD COMBO

Maker	Code(s)
SONY	401, 402, 403

To control a TV

Maker	Code(s)
SONY	501, 502
AIWA	501, 536, 539
AKAI	503
AOC	503
CENTURION	566
CORONADO	517
CURTIS-MATHES	503, 551, 566, 567
DAYTRON	517, 566
DAEWOO	504, 505, 506, 507, 515, 544
FISHER	508, 545
FUNAI	548
FUJITSU	528
GOLDSTAR/LG	503, 512, 515, 517, 534, 544, 556, 568
GRUNDIG	511, 533, 534
HITACHI	503, 513, 514, 515, 517, 519, 544, 557, 571
ITT/NOKIA	521, 522
J.C.PENNY	503, 510, 566
JVC	516, 552
KMC	517
MAGNAVOX	503, 515, 517, 518, 544, 566
MARANTZ	527
MITSUBISHI/MGA	503, 519, 527, 544, 566, 568
NEC	503, 517, 520, 540, 544, 554, 566
NORDMENDE	530, 558
NOKIA	521, 522, 573, 575
PANASONIC	509, 524, 553, 559, 572
PHILIPS	515, 518, 557, 570, 571
PHILCO	503, 504, 514, 517, 518
PIONEER	509, 525, 526, 540, 551, 555
PORTLAND	503
QUASAR	509, 535

Maker	Code(s)
RADIO SHACK	503, 510, 527, 565, 567
RCA/PROSCAN	503, 510, 523, 529, 544
SAMSUNG	503, 515, 517, 531, 532, 534, 544, 556, 557, 562, 563, 566, 569
SAMPO	566
SABA	530, 537, 547, 549, 558
SANYO	508, 545, 546, 560, 567
SCOTT	503, 566
SEARS	503, 508, 510, 517, 518, 551
SHARP	517, 535, 550, 561, 565
SYLVANIA	503, 518, 566
THOMSON	530, 537, 547, 549
TOSHIBA	535, 539, 540, 541, 551
TELEFUNKEN	530, 537, 538, 547, 549, 558
TEKNIKA	517, 518, 567
WARDS	503, 517, 566
YORK	566
ZENITH	542, 543, 567
GE	503, 509, 510, 544
LOEWE	515, 534, 556
VIZIO	576, 577

To control an LD player

Maker	Code(s)
SONY	601, 602, 603
PIONEER	606

To control a Video CD player

Maker	Code(s)
SONY	605

To control a VCR

Maker	Code(s)
SONY	701, 702, 703, 704, 705, 706
AIWA*	710, 750, 757, 758
BLAUPUNKT	740
EMERSON	750
FISHER	717, 720
GENERAL ELECTRIC (GE)	722, 730
GOLDSTAR/LG	723, 753
HITACHI	722, 725, 729, 741
ITT/NOKIA	717
JVC	726, 727, 728, 736
MAGNAVOX	730, 731, 738
MITSUBISHI/MGA	732, 733, 734, 735
NEC	736
PANASONIC	729, 730, 737, 738, 739, 740
PHILIPS	729, 730, 731
PIONEER	729
RCA/PROSCAN	722, 729, 730, 731, 741, 747
SAMSUNG	742, 743, 744, 745
SANYO	717, 720, 746
SHARP	748, 749
TOSHIBA	747, 756

* If an AIWA VCR does not work even though you enter the code for AIWA, enter the code for Sony instead.


To control a satellite tuner (box)

Maker	Code(s)
SONY	801, 802, 803, 804, 824, 825, 865
AMSTRAD	845, 846
BskyB	862
GENERAL ELECTRIC (GE)	866
GRUNDIG	859, 860
HUMAX	846, 847
THOMSON	857, 861, 864, 876
PACE	848, 849, 850, 852, 862, 863, 864
PANASONIC	818, 855
PHILIPS	856, 857, 858, 859, 860, 864, 874
NOKIA	851, 853, 854, 864
RCA/PROSCAN	866, 871
BITA/HITACHI	868
HUGHES	867
JVC/EchoStar/Dish Network	873
MITSUBISHI	872
SAMSUNG	875
TOSHIBA	869, 870

To control a cable box

Maker	Code(s)
SONY	821, 822, 823
HAMLIN/REGAL	836, 837, 838, 839, 840
JERROLD/G.I./MOTOROLA	806, 807, 808, 809, 810, 811, 812, 813, 814, 819
JERROLD	830, 831
OAK	841, 842, 843
PANASONIC	816, 826, 832, 833, 834, 835
PHILIPS	830, 831
PIONEER	828, 829
RCA	805
SCIENTIFIC ATLANTA	815, 816, 817, 844
TOCOM/PHILIPS	830, 831
ZENITH	826, 827

Resetting the remote control

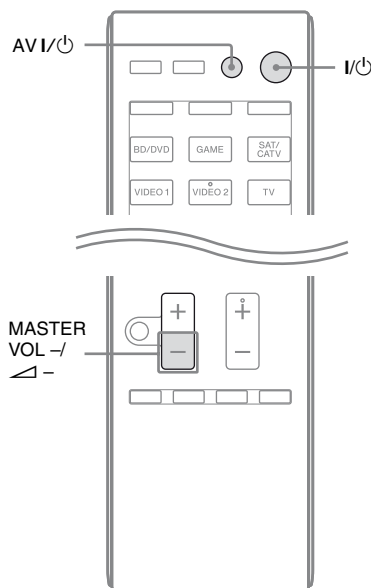

- 1 While holding down MASTER VOL – or , press and hold I/⏻, then press AV I/⏻.**

The RM SET UP indicator flashes 3 times.

- 2 Release all buttons.**

All the contents of the remote control memory (i.e., all the programmed data) are cleared.

Precautions

On safety

Should any solid object or liquid fall into the cabinet, unplug the receiver and have it checked by qualified personnel before operating it any further.

On power sources

- Before operating the receiver, check that the operating voltage is identical with your local power supply.

The operating voltage is indicated on the nameplate on the back of the receiver.

- The unit is not disconnected from the AC power source (mains) as long as it is connected to the wall outlet, even if the unit itself has been turned off.
- If you are not going to use the receiver for a long time, be sure to disconnect the receiver from the wall outlet. To disconnect the AC power cord (mains lead), grasp the plug itself; never pull the cord.
- (USA and Canada models only)
One blade of the plug is wider than the other for the purpose of safety and will fit into the wall outlet only one way. If you are unable to insert the plug fully into the outlet, contact your dealer.
- The AC power cord (mains lead) must be changed only at a qualified service shop.

On heat buildup

Although the receiver heats up during operation, this is not a malfunction. If you continuously use this receiver at a large volume, the cabinet temperature of the top, side and bottom rises considerably. To avoid burning yourself, do not touch the cabinet.

On placement

- Place the receiver in a location with adequate ventilation to prevent heat buildup and prolong the life of the receiver.
- Do not place the receiver near heat sources, or in a place subject to direct sunlight, excessive dust, or mechanical shock.
- Do not place anything on top of the cabinet that might block the ventilation holes and cause malfunctions.
- Do not place the receiver near equipment such as a TV, VCR, or tape deck. (If the receiver is being used in combination with a TV, VCR, or tape deck, and is placed too close to that equipment, noise may result, and picture quality may suffer. This is especially likely when using an indoor antenna (aerial). Therefore, we recommend using an outdoor antenna (aerial).)
- Use caution when placing the receiver on surfaces that have been specially treated (with wax, oil, polish, etc.) as staining or discoloration of the surface may result.

On operation

Before connecting other equipment, be sure to turn off and unplug the receiver.

On cleaning

Clean the cabinet, panel, and controls with a soft cloth slightly moistened with a mild detergent solution. Do not use any type of abrasive pad, scouring powder, or solvent, such as alcohol or benzene.

If you have any questions or problems concerning your receiver, please consult your nearest Sony dealer.

Troubleshooting

If you experience any of the following difficulties while using the receiver, use this troubleshooting guide to help you remedy the problem. Should any problem persist, consult your nearest Sony dealer. Note that if service personnel changes some parts during repair, these parts may be retained.

Power

The receiver is turned off automatically.

- “Auto Standby” is set to “ON” (page 102).
- The Sleep Timer function is working (page 15).

Sound

Dolby Digital, DTS or DTS 96/24 multi channel sound is not reproduced.

- Check that the DVD, etc. you are playing is recorded in Dolby Digital or DTS format.
- When connecting the DVD player, etc., to the digital input jacks of this receiver, make sure the digital audio output setting of the connected equipment is available.
- Set “Audio Out” to “AMP” in the HDMI Settings menu.
- When DTS 96/24 audio format is not reproduced, set the calibration type to “Off” and perform Auto Calibration again (page 43).

The surround effect cannot be obtained.

- Make sure you have selected the sound field for movie or music (page 64 or 65).
- Sound fields do not function when DTS-HD Master Audio, DTS-HD High Resolution Audio or Dolby TrueHD with sampling frequency of more than 48 kHz are being received.

There is no sound, or only a very low-level sound is heard from specific speakers.

- Connect a pair of headphones to the PHONES jack to verify that sound is output from the headphones. If only one channel is output from the headphones, the equipment may not be connected to the receiver correctly. Check that all the cords are fully inserted into the jacks on both the receiver and the equipment. If both channels are output from the headphones, the front speaker may not be connected to the receiver correctly. Check the connection of the front speaker which is not outputting any sound.
- Make sure you have connected to both the L and R jacks of an analog equipment, analog equipment requires both L and R jack connections. Use an audio cord (not supplied).
- Adjust the speaker level (page 92).
- Make sure the center/surround speaker (s) is (are) set to either “Small” or “Large”.
- Check that the speaker settings are appropriate for the setup using the Auto Calibration menu or “SP Pattern” in the Speaker Settings menu. Then check that sound is output from each speaker correctly, using “Test Tone” in the Speaker Settings menu.
- Some discs have no Dolby Digital Surround EX flag even though the packages have Dolby Digital Surround EX logos.
- Check that the subwoofer is connected correctly and securely.
- Make sure you have turned on your subwoofer.
- Depending on the selected sound field, no sound will be available from the subwoofer.
- When all speakers are set to “Large” and “NEO6 CIN” or “NEO6 MUS” is selected, there is no sound from the subwoofer.

There is no sound from a specific equipment.

- Check that the equipment is connected correctly to the audio input jacks for that equipment.
- Check that the cord(s) used for the connection is (are) fully inserted into the jacks on both the receiver and the equipment.
- Check the INPUT MODE (page 85).
- Check the setting of “Audio Out” in the HDMI Settings menu (page 98).
- Check that the equipment is connected correctly to the HDMI jack for that equipment.
- You cannot listen to the Super Audio CD by connecting HDMI.
- Depending on the playback equipment, you may need to set up the HDMI setting of the equipment. Refer to the operating instructions supplied with each equipment.
- Be sure to use a High Speed HDMI cable when you view images or listen to sound, especially for the 1080p, Deep Color (Deep Colour) or 3D transmission.
- Sound may not be output from the receiver while the GUI appears on the TV screen. Press GUI MODE to select “GUI OFF”.
- Check that the selected digital audio input jack is not reassigned to other inputs (page 86).
- Check that the “A. DIRECT” is not being used.

There is no sound, no matter which equipment is selected, or only a very low-level sound is heard.

- Check that all connecting cords are inserted to their input/output jacks for the respective jacks of the receiver, speakers and the equipment.
- Check that both the receiver and all equipment are turned on.
- Check that MASTER VOLUME control is not set to “VOL MIN”.
- Check that the SPEAKERS is not set to “SPK OFF” (page 38).

- Check that headphones are not connected to the receiver.
- Press MUTE or  on the remote control to cancel the muting function.
- Try pressing the input button on the remote control or turning the INPUT SELECTOR on the receiver to select the equipment of your choice (page 46).
- The protective device on the receiver has been activated. Turn off the receiver, eliminate the short-circuit problem, and turn on the power again.

There is severe hum or noise.

- Check that the speakers and equipment are connected securely.
- Check that the connecting cords are away from a transformer or motor, and at least 3 meters (10 feet) away from a TV set or fluorescent light.
- Move your audio equipment away from the TV.
- The plugs and jacks are dirty. Wipe them with a cloth slightly moistened with alcohol.

The left and right sounds are unbalanced or reversed.

- Check that the speakers and equipment are connected correctly and securely.
- Adjust the sound level parameters using the Speaker Settings menu.

When the receiver is in standby mode, there is no sound output from the TV.

- When the receiver enters into standby mode, sound is from the last HDMI component selection before you turned off the receiver. If you are enjoying other equipment, play the equipment and perform the One-Touch Play operation, or turn on the receiver to select the HDMI equipment you want to enjoy.
- Make sure “Pass Through” is set to “ON” in the HDMI Settings menu if you connect equipment not compatible with the “BRAVIA” Sync to the receiver (page 98).

No sound is output from the receiver and TV speaker.

- Check the setting of “Audio Out” in the HDMI Settings menu (page 98).
- Check that the equipment is connected correctly to the HDMI jack for that equipment.
- You cannot listen to the Super Audio CD by connecting HDMI.
- Depending on the playback equipment, you may need to set up the HDMI setting of the equipment. Refer to the operating instructions supplied with each equipment.
- Be sure to use a High Speed HDMI cable when you view images or listen to sound, especially for the 1080p, Deep Color (Deep Colour) or 3D transmission.
- Sound may not be output from the receiver while the GUI appears on the TV screen. Press GUI MODE to select “GUI OFF”.
- Make sure the TV is compatible with the System Audio Control function.
- If the TV does not have System Audio Control function, set the “Audio Out” settings in HDMI Settings menu to
 - “TV+AMP” if you want to listen to the sound from the TV speaker and receiver.
 - “AMP” if you want to listen to the sound from the receiver.
- When you connect the receiver to a video equipment (projector, etc.), sound may not be output from the receiver. In this case, select “AMP”.

- If you cannot listen to the sound of the equipment connected to the receiver while TV input is selected on the receiver.
 - Be sure to change the input of the receiver to HDMI when you want to watch a program on the equipment connected via HDMI connection to the receiver.
 - Change the TV channel when you want to watch a TV broadcast.
 - Be sure to select the correct equipment or input you want when you watch a program from the equipment connected to the TV. Refer to the operating instructions of the TV on this operation.

Recording cannot be carried out.

- Check that the equipment is connected correctly.
- Select the source equipment using the input buttons (page 46).

The MULTI CHANNEL DECODING indicator does not light up in blue.

- Check that the playback component is connected to a digital jack and the input is selected properly on this receiver.
- Check whether the input source of the software being played back corresponds to the multi channel format.
- Check whether the setup on the playback component is set to multi channel sound.
- Check to make sure the selected digital audio input jack is not assigned to other inputs in “Input Assign” in the Input Option menu (page 86).

There is a time gap between the audio output and visual display.

- Check that the PARTY STREAMING function is not being used. To close a PARTY, press SHIFT, then hold down PARTY until “CLOSE PARTY” appears. For details, see page 77.

Image

No image appears on the TV.

- Select the appropriate input using the input buttons.
- Set your TV to the appropriate input mode.
- Move your audio equipment away from the TV.
- Assign the equipment video input correctly.
- The input signal should be same as the input function when you are up-converting an input signal with this receiver (page 31).
- When you use an HDMI-DVI conversion cable for the connection, the image may not be output correctly.
- Make sure that cables are correctly and securely connected to equipment.
- Depending on the playback equipment, you may need to set up the equipment. Refer to the operating instructions supplied with each equipment.
- Be sure to use a High Speed HDMI cable when you view images or listen to sound, especially for the 1080p, Deep Color (Deep Colour) or 3D transmission.

No 3D image appears on the TV.

- Depending on the TV or the video equipment, 3D images may not be displayed. Check the 3D image formats supported by the receiver (page 126).

When the receiver is in standby mode, there is no image output from the TV.

- When the receiver enters into standby mode, image is from the last HDMI component selection before you turned off the receiver. If you are enjoying other equipment, play the equipment and perform the One-Touch Play operation, or turn on the receiver to select the HDMI equipment you want to enjoy.
- Make sure “Pass Through” is set to “ON” in the HDMI Settings menu if you connect equipment not compatible with the “BRAVIA” Sync to the receiver (page 98).

The image of the COMPONENT VIDEO MONITOR OUT is corrupted.

- The resolution of output signals from the COMPONENT VIDEO MONITOR OUT jacks may not be supported by your TV. In this case, select the appropriate resolution on the receiver (page 97).

Recording cannot be carried out.

- Check that the equipment is connected correctly.
- Select the source equipment using the input buttons (page 46).


The GUI menu does not appear on the TV screen.

- Press GUI MODE repeatedly to select “GUI ON”. If the GUI menu still does not appear on the TV screen, press MENU.
- Check that the TV is connected correctly.
- The resolution of output signals from the video jacks may not be supported by your TV. In this case, select the appropriate resolution on the receiver (page 97).

Tuner

The FM reception is poor.

- Use a 75-ohm coaxial cable (not supplied) to connect the receiver to an outdoor FM antennas (aerial) as shown below.

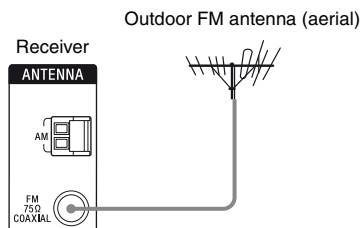

Radio stations cannot be tuned in.

- Check that the antennas (aerials) are connected securely. Adjust the antennas (aerials) and connect an external antenna (aerial), if necessary.
- Keep the satellite radio antenna, away from the speaker cords and the power cord to avoid picking up noise.*
- The signal strength of the stations is too weak with automatic tuning. Use direct tuning.
- Make sure you set the tuning scale correctly (when tuning in AM stations with direct tuning) (page 56).
- No stations have been preset or the preset stations have been cleared (when tuning by scanning preset stations is used). Preset the stations (page 56).
- Press AMP, then press DISPLAY repeatedly on the remote control so that the frequency appears on the display panel.

The receiver cannot receive satellite channels at all.*

- The receiving condition is not good. Move the antenna to the place where the condition is good.
- Check that you subscribed to the satellite radio service you want (page 58).

RDS does not work.**

- Make sure that you are tuned to an FM RDS station.
- Select a stronger FM station.

The RDS information that you want does not appear.**

- The service may be temporarily out of order. Contact the radio station and find out whether they actually provide the service in question.

* USA and Canada models only.

**Europe and Australia models only.

iPhone/iPod

The sound is distorted.

- Press MASTER VOL – or  – on the remote control repeatedly.
- Set the “EQ” setting of the iPhone/iPod to “Off” or “Flat”.

The iPhone/iPod cannot be charged.

- Check that the receiver is turned on.
- Make sure the iPhone/iPod is connected firmly.

The iPhone/iPod cannot be operated.

- Check that you have removed the protect case of the iPhone/iPod.
- Depending on the contents of the iPhone/iPod, it may take time to start playback.
- Disconnect the iPhone/iPod and connect the iPhone/iPod again.
- You are using an unsupported iPhone/iPod. See “Compatible iPod/iPhone models” (page 49) for the supported device types.

The ring volume of the iPhone does not change.

- Adjust the ring volume using the controls on the iPhone.

USB device

Are you using a supported USB device?

- If you connect an unsupported USB device, the following problems may occur. See “Compatible USB devices” (page 52) for the supported device types.
 - The USB device is not recognized.
 - File or folder names are not displayed on this receiver.
 - Playback is not possible.
 - The sound skips.
 - There is noise.
 - A distorted sound is output.

There is noise, skipping, or distorted sound.

- Turn off the receiver and reconnect the USB device, then turn on the receiver.
- The music data itself contains noise, or the sound is distorted.

The USB device cannot be connected into the (USB) port.

- The USB device is being connected backwards. Connect the USB device in the correct orientation.

“Reading” is displayed for an extended time, or it takes a long time before playback starts.

- The reading process can take a long time in the following cases.
 - There are many folders or files on the USB device.
 - The file structure is extremely complex.
 - The memory capacity is excessive.
 - The internal memory is fragmented.Thus, we recommend following these guidelines.
 - Total folders on USB device: 100 or less (including “ROOT” folder)
 - Total files per folder: 100 or less.

Erroneous display.

- The data stored in the USB device may have been corrupted.
- The character codes that can be displayed by this receiver are as follows:
 - Upper cases (A to Z)
 - Lower case (a to z)
 - Numbers (0 to 9)
 - Symbols (' < > * + , - . / @ [\] _ `)Other characters may not be displayed correctly.

The USB device is not recognized.

- Turn off the receiver, then disconnect the USB device. Turn on the receiver again and reconnect the USB device.
- Connect the supported USB device (page 52).
- The USB device does not work properly. Refer to the USB device operating instruction on how to deal with this problem.

Playback does not start.

- Turn off the receiver and reconnect the USB device, then turn on the receiver.
- Connect the supported USB device (page 52).
- Press  to start playback.

Audio file cannot be played back.

- MP3 files in MP3 PRO format cannot be played back.
- The audio file is a multiple track audio file.
- Some AAC files may not be played back correctly.
- WMA files in Windows Media Audio Lossless and Professional format cannot be played back.
- USB device formatted with file systems other than FAT16 or FAT32 are unsupported.*
- If you use partitioned USB device, only audio files on the first partition can be played back.
- Playback is possible up to 8 levels (including “ROOT” folder).
- The number of folders has exceeded 100 (including “ROOT” folder).
- The number of files in a folder has exceeded 100.
- Files that are encrypted or protected by passwords, etc. cannot be played back.

* This unit supports FAT16 and FAT32, but some USB device may not support all of these FAT. For details, refer to the operating instruction of each USB device or contact the manufacturer.

Network connection

An error message appears.

- Check the nature of the error. See “Network features message list” (page 79).

The receiver cannot connect to the network.

- Check the network status. See “To check the network information” (page 99), then select “Connection” in step 2.
If “No Connection” appears, set up the network connection again (page 69).
- Make sure the router is turned on.

Cannot control the receiver using the Media Remote device.

- The receiver may take a long time to connect to the network after you turn on the receiver. Wait for a few moments, and then try using the Media Remote again.
- Make sure “Network Standby” is set to “On” in the Network Settings menu so that you can use the Media Remote immediately after you have turned on the receiver.

You cannot select the Network Settings menu.

- Make sure the Home Network or Music Services function is selected.
- Wait for a few moments after you turned on the receiver, and then select the Network Settings menu again.

Home Network

The receiver cannot connect to the network.

- Make sure the router is turned on.
- Make sure the server is turned on.

- The network settings on the receiver may be incorrect. Check the network status. See “To check the network information” (page 99), then select “Connection” in step 2.
If “No Connection” appears, set up the network connection again (page 69).
- The server may be unstable. Restart it.
- Confirm that the receiver and the server are connected to the router correctly.
- Confirm that the server has been set correctly (page 69). Confirm that the receiver has been registered to the server and allows the music streaming from the server.
- If the ICF (Internet Connection Firewall) function is active on the computer, this may prevent the receiver from connecting to the computer (only when your computer is used as a server). You may need to change the firewall settings to allow the receiver to connect. (For details on changing the firewall settings, refer to the operating instructions supplied with your computer.)
- If you have initialized the receiver or performed a system recovery on your server, perform the network settings again (page 69).

The server (such as a computer) does not appear in the server list. (“No Server” appears on the TV screen.)

- You may have turned on this receiver before you turned on the server. Refresh the server list (page 72).
- Make sure that the router is turned on.
- Make sure that the server is turned on.
- Confirm that the server has been set correctly (page 69). Confirm that the receiver has been registered to the server and allows the music streaming from the server.
- Confirm that the receiver and the server are connected to the router correctly. Check the network setting information (page 99).

You cannot play audio data normally.

- Shuffle Play is selected. Press SHIFT, then press SHUFFLE repeatedly until “SHUF” disappears.

Play does not start, or does not automatically change to the next track or file.

- Make sure that the audio file you are trying to play is in a format supported by this receiver (page 73).
- WMA files with DRM copyright protection cannot be played back. For how to check the copyright protection of a WMA file, see page 74.

The sound skips during playback.

- When using your computer as a server, the computer may be running many applications. If anti-virus software is active on the computer, temporarily disable the software as it needs large amount of system resources.
- Depending on the network environment, it may not be possible to play tracks with more than one device operating at the same time. Turn off another device to enable the receiver to play tracks.

“Cannot Play” appears.

- You cannot play any files other than audio files.
- Confirm that the server has been set correctly (page 69). Confirm that the receiver has been registered to the server and allows the music streaming from the server.
- Check to confirm whether the audio file on the server has been damaged or erased. Refer to the operating instructions supplied with the server.
- You cannot play the following tracks:
 - A track that violates playback restrictions.
 - A track with irregular copyright information.
 - A track that you purchased at an online music store that does not allow home network streaming.
 - A track in a format unsupported by the receiver (page 73).

- Confirm that the selected track has not been erased from the server. If the track has been erased, select another track.
- Make sure that the router is turned on.
- Make sure that the server is turned on.
- The server may be unstable. Restart it.
- Confirm that the receiver and the server are connected to the router correctly.

“No Track” appears.

- If there are no tracks or folders in the selected folder, you cannot extend the folder to display its contents.

You cannot play a copyrighted WMA format track.

- For how to check the copyright protection of a WMA file, see page 74.

You cannot select a previously selected track.

- The track information may have been changed on the server. Reselect the server in the server list (page 72).

Devices on the home network cannot connect to the receiver.

- “Network Standby” may be set to “Off”. Turn on the receiver or set “Network Standby” to “On” (page 101).
- Confirm that the network is correctly set up. If it is not, the connection cannot be made (page 99).
- The device on the device list is set to “Not Allow” (page 100), or the device is not added to the device list (page 100).
- A maximum of 20 connectable devices has been set. Delete unnecessary devices on the device list, and then set “Auto Access” to “Allow” (page 100).
- Server operation of the receiver is suspended if the receiver is conducting one of the following operations.
 - Playing a track stored on the server (the receiver is operating as a player)
 - Updating the software

The receiver cannot be turned on automatically when accessed by devices on the network.

- The receiver itself does not support the Wake-on-LAN standard. Therefore the receiver cannot be turned on by Wake-on-LAN when “Network Standby” is set to “Off”. Set “Network Standby” to “On” so that the receiver can respond to operations by other devices via a network (page 101).

Devices on the network cannot turn on the receiver.

- The receiver cannot be turned on with a Wake-on-LAN start up operated by other devices on a network.

The receiver cannot play the track that is currently being played by the PARTY host.

- The PARTY host is playing a track of an audio format that cannot be played on the receiver.
- It may take a while before the playback sound is output.

The receiver joins an unintended PARTY.

- If more than one PARTY has been started when the receiver joins, the receiver may not be able to join the PARTY you want. Close the other PARTY, and then join the PARTY you want.

Music Services

You cannot connect the receiver to a service.

- Make sure that the router is turned on.
- Check the network status. See “To check the network information” (page 99), then select “Connection” in step 2. If “No Connection” appears, set up the network connection again (page 69).

- If your contract with your Internet provider limits Internet connection to one device at a time, this device will not be able to access the Internet when another device is already connected. Consult your carrier or service provider.

Remote control

The remote control does not function.

- Point the remote control at the remote control sensor on the receiver.
- Remove any obstacles in the path between the remote control and the receiver.
- Replace all the batteries in the remote control with new ones, if they are weak.
- Make sure you select the correct input on the remote control.
- When you operate a programmed non-Sony equipment, the remote control may not function properly depending on the model and the manufacturer of the equipment.

Other

The Control for HDMI function does not work.

- Check the HDMI connection (page 23, 24).
- Make sure “Ctrl for HDMI” is set to “ON” in HDMI Settings menu.
- Make sure the connected equipment is compatible with the Control for HDMI function.
- Check the Control for HDMI settings on the connected equipment. Refer to the operating instructions of the connected equipment.
- When “Ctrl for HDMI” is set to “OFF”, the “BRAVIA” Sync does not work properly, even if the equipment is connected to the HDMI IN jack.

- The types and the number of equipment which can be controlled by the “BRAVIA” Sync are restricted in the HDMI CEC standard as follows.
 - Recording equipment (Blu-ray Disc recorder, DVD recorder, etc.): up to 3 equipment
 - Playback equipment (Blu-ray Disc player, DVD player, etc.): up to 3 equipment
 - Tuner-related equipment: up to 4 equipment
 - AV receiver (audio system): up to 1 equipment

The TV's remote control cannot be used to control the connected equipment when using the Control for HDMI function.

- Depending on the connected equipment and TV, you may need to set up the equipment and TV. Refer to the operating instructions supplied with each equipment and TV.
 - Change the input of the receiver to the HDMI input connected to the equipment.
-

Error messages

If there is a malfunction, a message appears on the display panel. You can check the condition of the system by the message. If any problem persists, consult your nearest Sony dealer.

PROTECTOR

Irregular current is output to the speakers, or the receiver is covered and ventilation holes are blocked. The receiver will automatically turn off after a few seconds. Check the speaker connection and turn on the power again.

USB FAIL

An over current from the  (USB) port was detected. The receiver will automatically turn off after a few seconds. Check the iPhone/iPod or USB device, then unplug it and turn on the power again.

For other messages, see “Message list after Auto Calibration measurement” (page 42), “iPhone/iPod message list” (page 51), “USB message list” (page 54), “Satellite radio message list” (page 63) and “Network features message list” (page 79).

Clearing the memory

Reference sections

To clear	See
All memorized settings	page 36
Customized sound fields	page 68

About support information

Refer to the following web site for details of the latest information on the receiver.

For customers in the USA:

<http://www.esupport.sony.com/>

For customers in Canada:

[English]

<http://www.sony.ca/ElectronicsSupport/>

[French]

<http://fr.sony.ca/ElectronicsSupport/>

For customers in Europe:

<http://support.sony-europe.com/>

For customers in Australia:

<http://www.sony-asia.com/support>

Specifications

AUDIO POWER SPECIFICATIONS

POWER OUTPUT AND TOTAL HARMONIC DISTORTION: (USA model only)

With 8 ohm loads, both channels driven, from 20 Hz – 20,000 Hz; rated 100 watts per channel minimum RMS power, with no more than 0.09% total harmonic distortion from 250 milliwatts to rated output.

Amplifier section

USA model¹⁾

Minimum RMS Output Power
(8 ohms, 20 Hz – 20 kHz, THD 0.09%)
100 W + 100 W

Stereo Mode Output Power
(8 ohms, 1 kHz, THD 1%)
110 W + 110 W

Surround Mode Output Power²⁾
(8 ohms, 1 kHz, THD 10%)
150 W per channel

Canada model¹⁾
Minimum RMS Output Power
(8 ohms, 20 Hz – 20 kHz, THD 0.09%)
95 W + 95 W

Stereo Mode Output Power
(8 ohms, 1 kHz, THD 1%)
110 W + 110 W

Surround Mode Output Power²⁾
(8 ohms, 1 kHz, THD 10%)
150 W per channel

Europe and Australia models¹⁾
Stereo Mode Output Power
(8 ohms, 1 kHz, THD 1%)
100 W + 100 W

Surround Mode Output Power²⁾
(8 ohms, 1 kHz, THD 10%)
140 W per channel

¹⁾Measured under the following conditions:

Area	Power requirements
USA, Canada	120 V AC, 60 Hz
Europe, Australia	230 V AC, 50 Hz

²⁾Reference power output for front, center, surround, surround back and front high speakers. Depending on the sound field settings and the source, there may be no sound output.

Frequency response

Analog 10 Hz – 70 kHz,
+0.5 dB/–2 dB (with sound field and equalizer bypassed)

Input

Analog Sensitivity: 500 mV/
50 kohms
S/N³⁾: 96 dB
(A, 500 mV⁴⁾)

Digital (Coaxial) Impedance: 75 ohms
S/N: 100 dB
(A, 20 kHz LPF)

Digital (Optical) S/N: 100 dB
(A, 20 kHz LPF)

Output (Analog)

AUDIO OUT Voltage: 500 mV/1 kohm
SUBWOOFER Voltage: 2 V/1 kohm

Equalizer

Gain levels ±10 dB, 1 dB step

³⁾INPUT SHORT (with sound field and equalizer bypassed).

⁴⁾Weighted network, input level.

FM tuner section

Tuning range 87.5 MHz – 108.0 MHz
Antenna (aerial) FM wire antenna (aerial)
Antenna (aerial) terminals
75 ohms, unbalanced

Intermediate frequency
10.7 MHz

AM tuner section

Tuning range

Area	Tuning scale	
	10 kHz step	9 kHz step
USA, Canada	530 kHz – 1,710 kHz	531 kHz – 1,710 kHz
Europe, Australia	–	531 kHz – 1,602 kHz

Antenna (aerial) Loop antenna (aerial)

Intermediate frequency
450 kHz

Video section

Inputs/Outputs

Video: 1 Vp-p, 75 ohms

COMPONENT VIDEO:

Y: 1 Vp-p, 75 ohms

PB: 0.7 Vp-p, 75 ohms

PR: 0.7 Vp-p, 75 ohms

80 MHz HD Pass Through

HDMI Video

Input/Output (HDMI Repeater block)

Format	2D	3D		
		Frame packing	Side-by-Side (Half)	Over-Under (Top-and-Bottom)
1920 × 1080p @ 59.94/60 Hz	○	–	○	○
1920 × 1080p @ 50 Hz	○	–	○	○
1920 × 1080p @ 29.97/30 Hz	○	○	○	○
1920 × 1080p @ 23.98/24 Hz	○	○	○	○
1920 × 1080i @ 59.94/60 Hz	○	○	○	○
1920 × 1080i @ 50 Hz	○	○	○	○
1280 × 720p @ 59.94/60 Hz	○	○	○	○
1280 × 720p @ 50 Hz	○	○	○	○
1280 × 720p @ 29.97/30 Hz	○	○	○	○
1280 × 720p @ 23.98/24 Hz	○	○	○	○
720 × 480p @ 59.94/60 Hz	○	–	–	–
720 × 576p @ 50 Hz	○	–	–	–
640 × 480p @ 59.94/60 Hz	○	–	–	–

iPhone/iPod section

DC 5V 1.0 A MAX

USB section

Supported bit rate* MP3 (MPEG 1 Audio Layer-3):
32 kbps – 320 kbps, VBR
WMA: 48 kbps – 192 kbps
AAC: 48 kbps – 320 kbps
* Compatibility with all encoding/writing software, recording devices and recording media cannot be guaranteed.

Transfer speed Full-speed

Supported USB device Mass Storage Class

Maximum current 500 mA

NETWORK section

10BASE-T/100BASE-TX

General

Power requirements

Area	Power requirements
USA, Canada	120 V AC, 60 Hz
Europe, Australia	230 V AC, 50/60 Hz

Power consumption 240 W

Power consumption (during standby mode)
0.3 W (When “Ctrl for HDMI” is set to “OFF”)

Dimensions (width/height/depth) (Approx.)
430 mm × 158 mm × 322.6 mm (17 in × 6 1/4 in × 12 3/4 in) including projecting parts and controls

Mass (Approx.) 8.8 kg (19 lb 7 oz)

Design and specifications are subject to change without notice.

Halogenated flame retardants are not used in the certain printed wiring boards.

Index

Numerics

- 2 channel 64
- 5.1 channel 19
- 7.1 channel 19

A

- A.F.D. mode 64
- A/V Sync 95, 106
- Alphabet search 14
- AM 55
- Antenna Aiming 59
- Audio Out 98, 107
- Audio Settings 95, 106
- Auto Calibration Settings 104
- Auto Standby 102, 107
- Auto Tuning 55

B

- Bass 95, 106
- BI-AMP 38, 88
- Bi-amplifier connection 88
- Blu-ray Disc player 27
- BRAVIA Sync preparing 82

C

- Cable TV tuner 28
- Calibration Type 104
- Camcorder 30
- Category Mode 60
- CD player 32
- Clear
 - memory 36
 - remote control 113
 - sound field 68
- Connection
 - antennas 33
 - audio equipment 32
 - iPhone/iPod 29
 - Network 33
 - speakers 21
 - TV 23
 - USB device 32
 - video equipment 24
- Control for HDMI 98
- Crossover frequency 93, 105

D

- DCAC (Digital Cinema Auto Calibration) 38
- Device Name 101
- Digital Legato Linear (D.L.L.) 95
- Direct Tuning 55
- Display panel 10
- Distance Unit 94, 105
- DLNA 69
- Dolby Digital EX 67
- Dual Mono 96, 106
- DVD player 27
- DVD recorder 30
- Dynamic range compression 94, 104

E

- Effect level 94
- EQ Settings 95, 106

F

- FM 55
- FM Mode 55, 106

G

- GUI (Graphical User Interface) 44

H

- HD-D.C.S. 65
- HDMI Settings 98, 107
- Home Network 73

I

- iPhone/iPod 119
- Input 46
- Input Assign 86
- INPUT MODE 85

L

- Level Settings 104
- LFE (Low Frequency Effect) 11
- Lock Code 62

M

- Manual Setup 92
- Menu 91, 104
- Message
 - Auto Calibration 42
 - Error 124
 - iPhone/iPod 51
 - Network features 79
 - SIRIUS 63
 - USB 54
- Movie mode 64
- Multi zone 88
- Music mode 65
- Music Services 75
- Muting 47

N

Name Input 48, 57
Network settings 99
Network Standby 101

O

One-Touch Play 83
Option menu 45

P

Parental Lock 61
PARTY STREAMING 77
Pass Through 98, 107
PlayStation 3 29
Preset channels 60
Preset Mode 60
Preset stations 56
PROTECTOR 124

R

RDS 57
Recording 54
Remote control 13, 109
Resetting 36
Resolution 97

S

SB Assign 92
Scene Select 84
Server 69
Server list 72
Settings menu 91
Sirius ID 59
SIRIUS Satellite Radio 58
Sleep Timer 15
Software Update 101
Sound field 64
SOUND OPTIMIZER 68
Speaker Pattern 92, 104
Speaker Settings 92, 104
SPEAKERS 38
Super Audio CD player 32
Surround Settings 94, 106
System Audio Control 83
System Power-Off 84
System Settings 102, 107

T

Test Tone 93, 104
Theater/Theatre Mode Sync
84
Treble 95, 106
Tuner 55
Tuner Settings 106
TV 23

U

Up converting 31
USB device 52

V

VCR 30
Video Settings 97, 106
Viewing information in the
display 108

W

Wake-on-LAN 73

Z

Zone 2 88

END-USER LICENSE AGREEMENT FOR SONY SOFTWARE

You should carefully read the following agreement before using the SONY SOFTWARE (defined below). Using the SONY SOFTWARE indicates your acceptance of the agreement. If you do not agree with it, you are not authorized to use the SONY SOFTWARE.

IMPORTANT - READ CAREFULLY: This End-User License Agreement (“EULA”) is a legal agreement between you and Sony Corporation (“SONY”), the manufacturer of your Sony hardware device (the “PRODUCT”) and the licensor of the SONY SOFTWARE. All Sony software and third party software (other than such software subject to its own separate license) included with your PRODUCT and any updates and upgrades thereto shall be referred to herein as the “SONY SOFTWARE”. You may use the SONY SOFTWARE only with the PRODUCT.

By using the SONY SOFTWARE, you agree to be bound by the terms of this EULA. If you do not agree to the terms of this EULA, SONY is unwilling to license the SONY SOFTWARE to you. In such event, you should not use the SONY SOFTWARE.

SONY SOFTWARE LICENSE

The SONY SOFTWARE is protected by copyright laws and international copyright treaties, as well as other intellectual property laws and treaties. The SONY SOFTWARE is licensed, not sold.

GRANT OF LICENSE

All title, copyright and other rights in and to the SONY SOFTWARE are owned by SONY or its licensors. This EULA grants you the right to use the SONY SOFTWARE for personal use only.

DESCRIPTION OF REQUIREMENTS, RESTRICTIONS, RIGHTS AND LIMITATIONS

Limitations. You may not copy, modify, reverse engineer, decompile or disassemble the SONY SOFTWARE in whole or in part.

Separation of Components. The SONY SOFTWARE is licensed as a single product. Its component parts may not be separated.

Use on Single PRODUCT. The SONY SOFTWARE may only be used with a single PRODUCT.

Rental. You may not rent or lease the SONY SOFTWARE.

Software Transfer. You may permanently transfer all of your rights under this EULA only when the SONY SOFTWARE is transferred together with and as part of the PRODUCT, provided that you retain no copies, transfer all of the SONY SOFTWARE (including but not limited to all copies, component parts, media, instruction manuals, other printed materials, electronic documents, recovery disks and this EULA) and the recipient agrees to the terms of this EULA.

Termination. Without prejudice to any other rights, SONY may terminate this EULA if you fail to comply with the terms of this EULA. In such event, when requested by SONY, you must send the PRODUCT to an address designated by SONY, and SONY will send back the PRODUCT to you as soon as practicable after the SONY SOFTWARE has been deleted from the PRODUCT.

Confidentiality. You agree to keep confidential information contained in SONY SOFTWARE which is not publicly known and not to disclose such information to others without SONY’s prior written approval.

HIGH RISK ACTIVITIES

The SONY SOFTWARE is not fault-tolerant and is not designed, manufactured or intended for use or resale as on-line control equipment in hazardous environments requiring fail-safe performance, such as in the operation of nuclear facilities, aircraft navigation or communication systems, air traffic control, direct life support machines or weapons systems, in which the failure of the SONY SOFTWARE could lead to death, personal injury or severe physical or environmental damage (“High Risk Activities”). SONY and its suppliers specifically disclaim any express or implied warranty of fitness for High Risk Activities.

EXCLUSION OF WARRANTY ON SONY SOFTWARE

You expressly acknowledge and agree that use of the SONY SOFTWARE is at your sole risk. The SONY SOFTWARE is provided "AS IS" and without warranty of any kind, and SONY, its vendors and SONY's licensors (for purposes of this SECTION only, collectively, "SONY") EXPRESSLY DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. SONY DOES NOT WARRANT THAT THE FUNCTIONS CONTAINED IN THE SONY SOFTWARE ARE FREE FROM ERRORS OR BUGS OR WILL MEET YOUR REQUIREMENT, AND SONY DOES NOT WARRANT THAT THE OPERATION OF THE SONY SOFTWARE WILL BE CORRECTED. FURTHERMORE, SONY DOES NOT WARRANT OR MAKE ANY REPRESENTATIONS REGARDING THE USE OR THE RESULTS OF THE USE OF THE SONY SOFTWARE IN TERMS OF ITS CORRECTNESS, ACCURACY, RELIABILITY OR OTHERWISE. NO ORAL OR WRITTEN INFORMATION OR ADVICE GIVEN BY SONY OR A SONY AUTHORIZED REPRESENTATIVE SHALL CREATE A WARRANTY OR IN ANY WAY INCREASE THE SCOPE OF THIS WARRANTY. SOME JURISDICTIONS DO NOT ALLOW THE EXCLUSION OF IMPLIED WARRANTIES, IN WHICH CASE THE ABOVE EXCLUSION WOULD NOT APPLY TO YOU.

Without limiting any of the foregoing, it is specifically provided that the SONY SOFTWARE is not designed or intended for use on any product other than the PRODUCT. SONY provides no warranty that any product, software, content or data created by you or a third party will not be damaged by the SONY SOFTWARE.

LIMITATION OF LIABILITY

SONY, ITS SUPPLIERS AND SONY'S LICENSOR'S (for purposes of this SECTION ONLY, collectively, "SONY") SHALL NOT BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES RELATING TO THE SONY SOFTWARE ARISING FROM OR BASED ON BREACH OF ANY EXPRESS OR IMPLIED WARRANTY, BREACH OF CONTRACT, NEGLIGENCE, STRICT LIABILITY OR ANY OTHER LEGAL THEORY. SUCH DAMAGES INCLUDE, BUT ARE NOT LIMITED TO, LOSS OF PROFITS, LOSS OF REVENUE, LOSS OF DATA, LOSS OF USE OF THE PRODUCT OR ANY ASSOCIATED EQUIPMENT, DOWN TIME AND USER'S TIME, REGARDLESS OF WHETHER SONY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. IN ANY CASE, SONY'S ENTIRE LIABILITY TO YOU UNDER ANY PROVISION OF THIS EULA SHALL BE LIMITED TO THE AMOUNT ACTUALLY PAID ALLOCABLE TO THE SONY SOFTWARE.

EXPORTS

If you use or transfer the SONY SOFTWARE in or to a country other than your country of residence, you shall comply with applicable laws and regulations relating to exports, imports and customs.

GOVERNING LAW

This EULA shall be construed, governed, interpreted and applied in accordance with the laws of Japan, without regards to any conflict of laws provisions. Any dispute arising out of this EULA shall be subject to the exclusive venue and jurisdiction of the courts in Tokyo, Japan, and you and SONY hereby consent to the venue and jurisdiction of such courts. YOU AND SONY WAIVE THE RIGHT TO TRIAL BY JURY WITH RESPECT TO ANY MATTERS ARISING UNDER OR RELATING TO THIS EULA.

SEVERABILITY

If any part of this EULA is held invalid or unenforceable, other parts will remain valid.

Should you have any questions in connection with this EULA or the limited warranty provided hereunder, you may contact SONY by writing to SONY at the designated contact address mentioned in the warranty card included in the product package.

